



diomede

diomede


LET THERE BE LIGHT

external use program
2026

Authentic Italian Product



Diomedé intends to bring light to people.
A workshop peopled with digital renaissance craftsmen;
fond of such a dynamic light, capable to reduce in a unique and essential
movement engineering's necessities, design bursts, and architectural stunts.

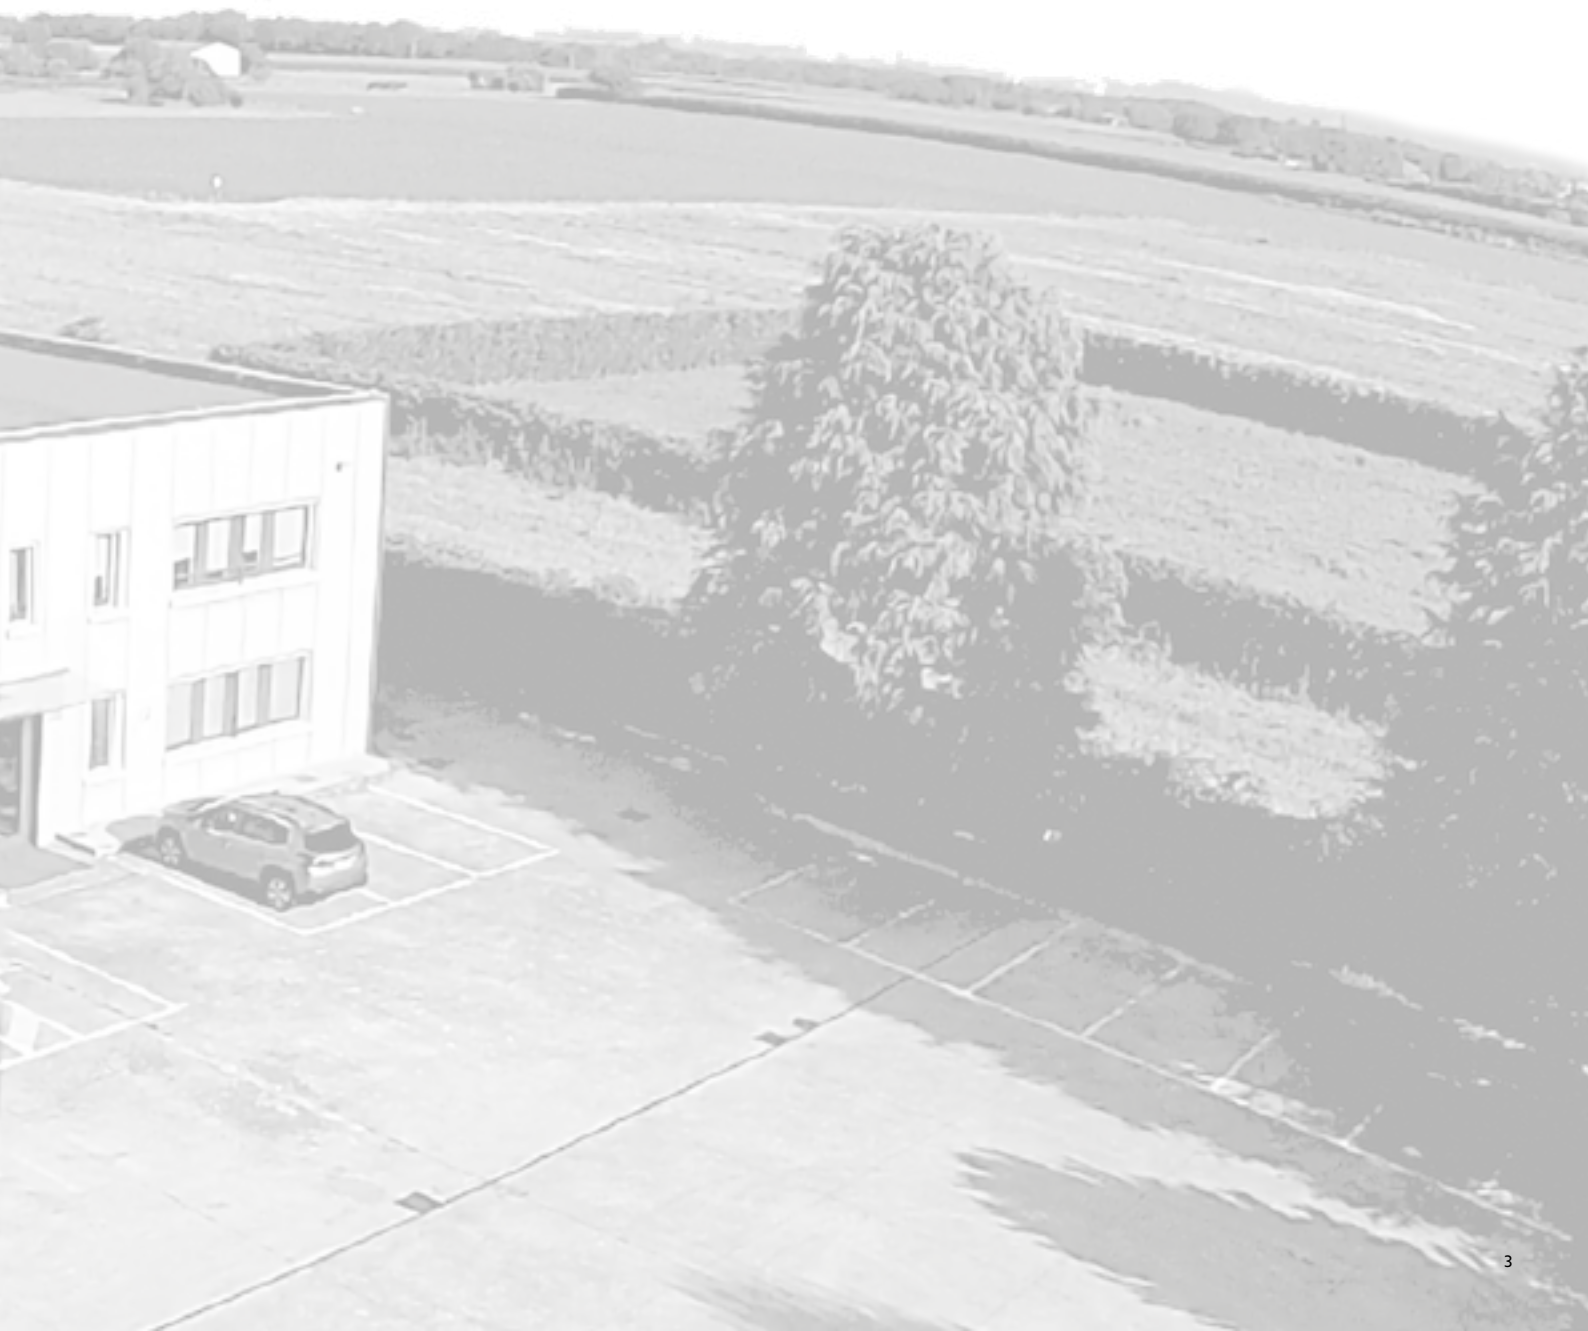

Portfolio



SURFACE TREATMENT AND PAINTING PROCESS

Aluminium fixtures are treated by cataphoresis process followed by a layer of polyester powder coating; this to prevent Uv rays and external agents damages.

LINE LOADING

- > **PHOSPHODEGREASING WITH IRON SALTS:**
degreasing and phosphating Rinsing, cleaning and layer of soft iron salts deposit.
- > **FINAL RINSING:**
Pre Cataphoresis rinse with demi water to remove residues.
- > **CATHODIC ELECTRODEPOSITION:**
immersion in cataphoresis tank and rinsing
- > **HEATING:**
Surface polymerization of the cataphoresis layer heating at 170/180°C.

LINE LOADING

- > **POLYESTER POWDER COATING:**
Aluminium parts are 60/80 micron coated electrostatic guns tribo type, by hand or automatic reciprocator.
- > **OVEN HEATING:**
21' at 190°C



white



sand



graphite



aluminium



corten



olive green



BELLA
p. 9



GLER SUN
p. 67



NOCTIS
p. 109



LUCIGNOLO
p. 147



LEA
p. 19



ULISSE
p. 83



ITACA
p. 119



TALON
p. 159



STER
p. 35



MIMICRY
p. 93



METOO
p. 131



DIVAR
p. 169



NOTHING
p. 57



DOTLIGHT
p. 99



ELOISE
p. 139



ROOT
p. 181



ARIA
p. 191



DX
p. 221



SOFIA
p. 305



ZEUS
p. 339



ZERO
p. 195



MUSE
p. 243



MATITA
p. 315



LIGHTSABER
p. 347



TASCA
p. 207



TREE SPOT
p. 287



NAIL
p. 323



MIRON
p. 369



MODULO A
p. 213



LILA
p. 297



MATITA SQUARE
p. 331



Bella

TOUCH OF ELEGANCE

Elegant and minimalistic, Bella is a floor lamp suitable for both outdoor and indoor environments, unique in its kind. It is equipped with a rechargeable and removable battery housed in the geo-mortar base.

The structure is made of fine aluminum, powder-coated with polyester, while the joint, anodized, allows rotation on both axes. Versions with a cable and IP65 connector or cable and IP20 plug are also available.

The LED color temperatures are 2700K and 3000K, and the LED board is housed in the structure and sealed with opal polyurethane resin to ensure IP protection.

Bella is dimmable from 10% to 100% and can be activated via the soft touch sensor located in the front slot of the base.

Elegante e minimale Bella è una piantana adatta ad ambienti esterni o interni, unica nel suo genere, perché equipaggiata con batteria ricaricabile ed estraibile alloggiata nella base in geo malta.

La struttura di finissimo alluminio è verniciata a polvere di poliestere mentre lo snodo, anodizzato, ne rende possibile la rotazione su entrambi gli assi.

Sono disponibili anche versioni con cavo e connettore IP65 o cavo e spina IP20.

Le colorazioni led sono (2700K e 3000K), la scheda led è alloggiata nella struttura e sigillata con resina poliuretanica opale a garanzia della tenuta IP.

Bella è dimmerabile 10%-100% e attivabile tramite il soft touch sensor alloggiato nella fessura frontale della base.









Bella PRO

L 1700

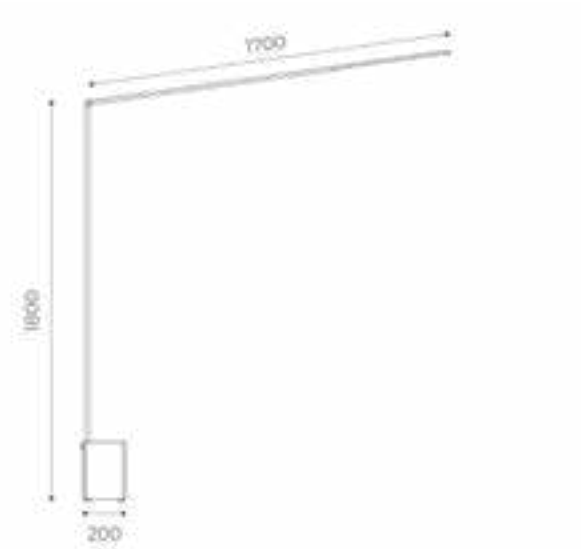


Available finishes:



Light Source	mid power led
Supply	cell lithium battery;230V
Dimmer	yes
CRI	≥80
Electrical Class	III, II
IP rating	40
Application	floor portable
Diffuser	lens

Power	11,5W
Led Colour temp.	2700K - 3000K



Battery Version | IP40

		lm	code
2700K	III	1040	901938057
3000K		1080	901918057
11,5Wled			

Cable Version | IP40

		lm	code
2700K	II	1040	901931077
3000K		1080	901911077
11,5Wled			
14We			

Cable&Plug Version | IP20

		lm	code
2700K	II	1040	901931067
3000K		1080	901911067
11,5Wled			
14We			




Bella




Bella PRO

Bella

L 1700

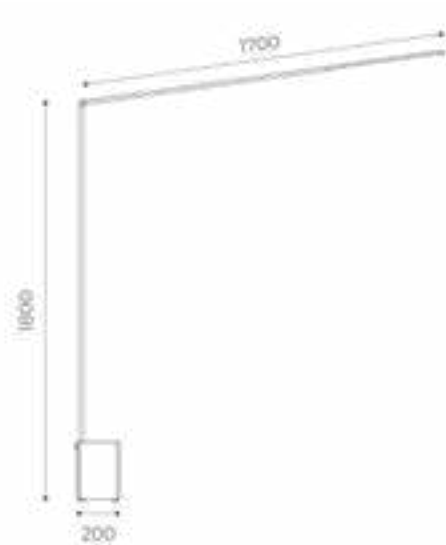

Available finishes:



black

Light Source	mid power led
Supply	cell lithium battery; 230V
Dimmer	yes
CRI	≥80
Electrical Class	III, II
IP rating	65 - 20
Application	floor portable
Diffuser	polyurethane opal resin

Power	11,5W
Led Colour temp.	2700/2800K - 3000/3100K



Battery Version | IP65

		lm	code
2700/2800K	III	840	901938007
3000/3100K		867	901918007
11,5Wled			

Cable Version | IP65

		lm	code
2700/2800K	II	840	901931047
3000/3100K		867	901911047
11,5Wled			
14We			

Cable&Plug Version | IP20

		lm	code
2700/2800K	II	840	901931027
3000/3100K		867	901911027
11,5Wled			
14We			

courtesy white light off



courtesy white light on




cable/cable europlug version



battery version



ACCESSORIES



Battery Pack
code **9070**



ACCESSORIES:
code **9070**



Lea

ELEGANCE AND TIMELESS FORMS

The evocation of the past—its elegance and timeless forms—returns in a contemporary interpretation with LEA.

A complete family designed for all main applications: the pole version available in 2 m height; bollards in 500 mm and 800 mm; the most traditional wall-mounted and the suspended versions with 500 mm and 1000 mm stems.

The structure is made of machined and extruded aluminium, treated with cataphoresis and coated with outdoor-resistant polyester powder.

Equipped with G9 or E27 bulb, 3000K.

The diffuser is a multi-layer, blown glass sphere in opal white, acid-etched. Rated IP65.

L'evocazione del passato, l'eleganza e le forme di un tempo tornano in chiave moderna con LEA.

Una famiglia completa che si sviluppa in tutte le principali applicazioni: la versione palo disponibile in altezza 2mt, i bollard da 500mm e 800mm; la più tradizionale applique e la sospensione con steli da 500mm e 1000mm.

La struttura è in alluminio lavorato ed estruso, trattato con cataforesi e verniciato con polvere di poliestere resistente agli ambienti esterni.

Equipaggiato con portalamпада e lampadina inclusa 3000K, G9 o E27.

Il diffusore è una sfera in vetro multistrato soffiato di colore bianco latte, acidato. Garantito IP65.

Design by Brian Sironi












Lea 130

applique

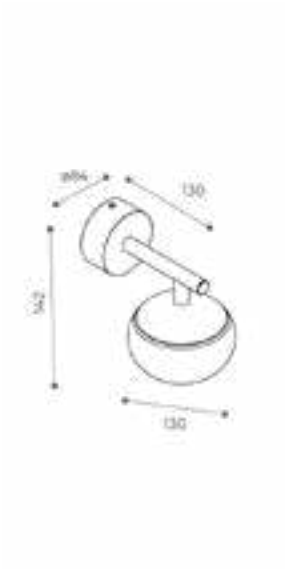

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

G9 bulb
220-240V
≥80
IP65
II
wall
white opal glass hemisphere

Power
Led Colour temp. 4,8W max
3000K



				white	sand	graphite	aluminium	corten	green
G9	220-240V	3000K	diffused	903111002	903111003	903111004	903111005	903111008	9031110016
4,8Wmax									

Lea 130 bollard

h500 / h800


Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

G9 bulb
220-240V
≥80
IP65
II
floor, ground
white opal glass hemisphere

Power 4,8W max
Led Colour temp. 3000K

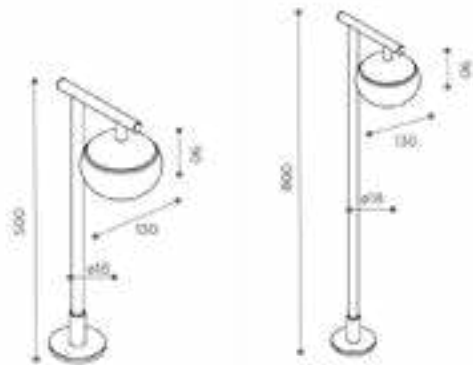

h500

				white	sand	graphite	aluminium	corten	green
G9	220-240V	3000K	diffused	903111012	903111013	903111014	903111015	903111018	903111016
4,8Wmax									

h800

				white	sand	graphite	aluminium	corten	green
G9	220-240V	3000K	diffused	903111022	903111023	903111024	903111025	903111028	9031110216
4,8Wmax									



Lea 130 suspension

h500 / h1000



Available finishes:



Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

G9 bulb
220-240V
≥80
IP65
II
ceiling
white opal glass hemisphere

Power 4,8W max
Led Colour temp. 3000K



h500

				white	sand	graphite	aluminium	corten	green
G9	220-240V	3000K	diffused	903111032	903111033	903111034	903111035	903111038	9031110316
4,8Wmax									


h1000

				white	sand	graphite	aluminium	corten	green
G9	220-240V	3000K	diffused	903111042	903111043	903111044	903111045	903111048	9031110416
4,8Wmax									



Lea 200

applique

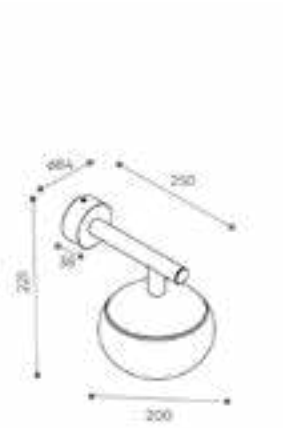

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

E27 bulb
220-240V
≥80
IP65
II
wall
white opal glass hemisphere


Power
Led Colour temp. 15W max
3000K



				white	sand	graphite	aluminium	corten	green
E27	220-240V	3000K	diffused	903111052	903111053	903111054	903111055	903111058	9031110516
15Wmax									

Lea 200 bollard

h200

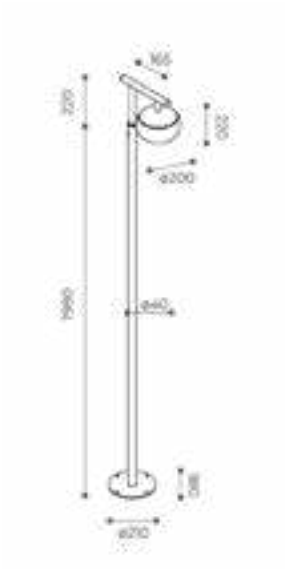

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

E27 bulb
220-240V
≥80
IP65
II
floor, ground
white opal glass hemisphere

Power 15W max
Led Colour temp. 3000K



					white	sand	graphite	aluminium	corten	green
E27	220-240V	3000K	diffused	base	903111062	903111063	903111064	903111065	903111068	9031110616
15Wmax				in-ground	903111072	903111073	903111074	903111075	903111078	9031110716

Lea 200 suspension

h500 / h1000



Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

E27 bulb
220-240V
≥80
IP65
II
ceiling
white opal glass hemisphere

Power
Led Colour temp. 15W max
3000K




h500

				white	sand	graphite	aluminium	corten	green
E27	220-240V	3000K	diffused	903111082	903111083	903111084	903111085	903111088	9031110816
15Wmax									

h1000


				white	sand	graphite	aluminium	corten	green
E27	220-240V	3000K	diffused	903111092	903111093	903111094	903111095	903111098	9031110916
15Wmax									

ACCESSORIES



Lea130:
Anchor bolts
Ø205x200mm

code **9062**



Lea200:
Anchor bolts
Ø205x200mm

code **9093**

ACCESSORIES:

code **9062 / 9093**



Ster

GEOMETRY HIGHLIGHTS SIMPLICITY AND EFFICIENCY

A cone of light designed to illuminate outdoor spaces, with a strong and contemporary design—its geometry highlights simplicity and efficiency.

Ster is a projector available in multiple configurations, suitable for all main applications.

SPOT GU10 Model: Available as a wall-mounted projector or as a bollard with single or double emission (H 500 mm, 800 mm), equipped with a GU10 lampholder (lamp not included), or in the SPOT10° version with SORAA® lamp (beam and light-colour accessories to be ordered separately). Die-cast aluminium body, with cataphoresis treatment and polyester powder coating, the base is made of turned aluminium specifically treated for outdoor resistance.

Adjustability: $\pm 90^\circ$ tilt / $\pm 355^\circ$ rotation.

The transparent, tempered glass with black silk-screened is attached to the removable frame for access during maintenance.

Direct power supply 220–240V.

DIFFUSED Model: Available as a wall fixture, single or double-emission bollard (500 mm and 800 mm), or suspension with rod.

Light source: midpower LED, 2700K or 3000K, CRI ≥ 90 .

The luminaire body and base are made of turned aluminium with cataphoresis treatment and polyester powder coating.

The transparent, tempered glass with black screen-printing is sealed to the body to ensure IP66 protection.

Power supply: 220–240V (phase-cut dimmable for wall version) or 24V with remote driver to be ordered separately.

Un cono di luce ad illuminare gli spazi esterni, design deciso e attuale, una geometria che esalta semplicità ed efficienza.

Ster è un proiettore che si declina in molteplici soluzioni e per tutte le applicazioni principali.

Modello SPOT GU10: in versione proiettore a parete o bollard a singola o doppia emissione (h500mm, 800mm) con portalampada senza lampadina o in versione SPOT10° con lampadina SORAA® (accessori relativi a fascio e colore di luce, da ordinare separatamente). Corpo in pressofusione di alluminio con cataforesi e verniciatura a polvere di poliestere, base in alluminio tornito e trattato appositamente per la resistenza all'esterno. Puntabilità $\pm 90^\circ$ - orientabilità $\pm 355^\circ$. Il vetro trasparente e temprato con serigrafia nera è incollato alla ghiera removibile per la manutenzione del vano.

Alimentazione diretta 220-240V.

Modello DIFFUSED: versione parete, bollard a singola o doppia emissione da 500mm e 800mm oppure sospensione con tige. Sorgente luminosa power Led nelle colorazioni 2700K e 3000K CRI ≥ 90 . Corpo lampada e basetta in alluminio tornito trattato con cataforesi e verniciatura in polvere di poliestere. Il vetro trasparente e temprato con serigrafia nera è incollato al corpo a garanzia della tenuta IP66.

Alimentazione 220-240V (dimmabile phase-cut per la versione a parete) o 24V alimentazione remota da predisporre separatamente.

Design by Brian Sironi



Ster Diffused

wall



Available finishes:



Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
220-240V
≥80
PWM 24V;
IP66
II, III
wall
sandblasted glass


Power 24V 6Wled
220-240V 6Wled - 8We
Led Colour temp. 2700K / 3000K



					white	sand	graphite	aluminium	corten	green
2700K 6Wled	24V	III	diffused	lm	902832062	902832063	902832064	902832065	902832068	9028320616
					white	sand	graphite	aluminium	corten	green
3000K 6Wled	24V	III	diffused	lm	902812062	902812063	902812064	902812065	902812068	9028120616
					white	sand	graphite	aluminium	corten	green
2700K 6Wled 8We	220-240V	II	diffused	lm	902831062	902831063	902831064	902831065	902831068	9028310616
					white	sand	graphite	aluminium	corten	green
3000K 6Wled 8We	220-240V	II	diffused	lm	902811062	902811063	902811064	902811065	902811068	9028110616

Ster Diffused

single bollard h500

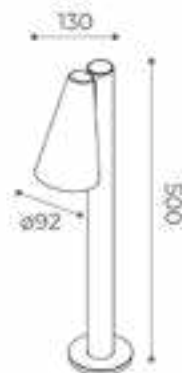

Available finishes:



Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
220-240V
≥80
only 24V (PWM)
IP66
II, III
floor
sandblasted glass

Power 24V 6Wled
220-240V 6Wled - 8We
Led Colour temp. 2700K / 3000K



					white	sand	graphite	aluminium	corten	green
2700K 6Wled 8We	24V	III	diffused	lm	902832072	902832073	902832074	902832075	902832078	9028320716
3000K 6Wled 8We	24V	III	diffused	lm	902812072	902812073	902812074	902812075	902812078	9028120716
2700K 6Wled 8We	220-240V	II	diffused	lm	902831072	902831073	902831074	902831075	902831078	9028310716
3000K 6Wled 8We	220-240V	II	diffused	lm	902811072	902811073	902811074	902811075	902811078	9028110716

Ster Diffused

single bollard h800


Available finishes:



Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
220-240V
≥80
only 24V (PWM)
IP66
II, III
floor
sandblasted glass

Power 24V 6Wled
220-240V 6Wled - 8We
Led Colour temp. 2700K / 3000K

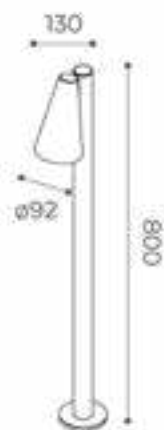

					white	sand	graphite	aluminium	corten	green
2700K 6Wled 8We	24V	III	diffused	lm	902832082	902832083	902832084	902832085	902832088	9028320816
					white	sand	graphite	aluminium	corten	green
3000K 6Wled 8We	24V	III	diffused	lm	902812082	902812083	902812084	902812085	902812088	9028120816
					white	sand	graphite	aluminium	corten	green
2700K 6Wled 8We	220-240V	II	diffused	lm	902831082	902831083	902831084	902831085	902831088	9028310816
					white	sand	graphite	aluminium	corten	green
3000K 6Wled 8We	220-240V	II	diffused	lm	902811082	902811083	902811084	902811085	902811088	9028110816

Ster Diffused

double bollard h800

Available finishes:



Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
220-240V
≥80
only 24V (PWM)
IP66
II, III
floor
sandblasted glass

Power 24V 2x6Wled
220-240V 2x6Wled - 14We
Led Colour temp. 2700K / 3000K



					white	sand	graphite	aluminium	corten	green
2700K 2X6Wled 12We	24V	III	diffused	lm	902832092	902832093	902832094	902832095	902832098	9028320916
					white	sand	graphite	aluminium	corten	green
3000K 2X6Wled 12We	24V	III	diffused	lm	902812092	902812093	902812094	902812095	902812098	9028120916
					white	sand	graphite	aluminium	corten	green
2700K 2X6Wled 14We	220-240V	II	diffused	lm	902831092	902831093	902831094	902831095	902831098	9028310916
					white	sand	graphite	aluminium	corten	green
3000K 2X6Wled 14We	220-240V	II	diffused	lm	902811092	902811093	902811094	902811095	902811098	9028110916




Snap System Accessories

SORAA



The Snap System's self-centering magnetic interconnect system makes using accessories completely user friendly. Simply attached the Snap System™ accessory directly to any narrow spot Soraa lamp, the magnetic force from both the accessory and lamp will securely attached to one another and center itself.

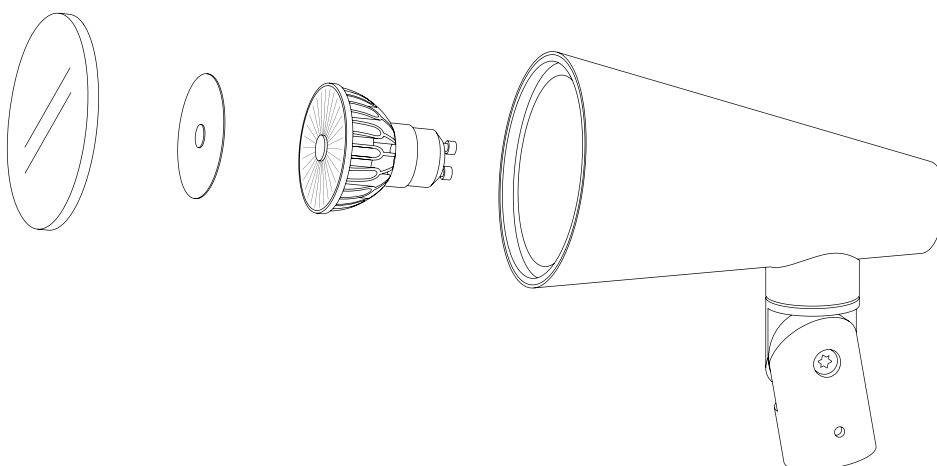

ACCESSORIES



Beam Spreader Snap

Increase the beam angle from standard 10° to:

- 36° code **9084**
- 60° code **9085**

Lumen transmissivity: 90%

Diameter: 50mm. **Thickness:** 2mm

Magnetic attach force: 0.6N



Linear Snap

Ensure elliptical beam angle for wall washing effect or asymmetric projections:

- 10°x60° code **9086**

Lumen transmissivity: 90%

Diameter: 50mm. **Thickness:** 2mm

Magnetic attach force: 0.6N



Louver Snap

Eliminates high angle glare.

- Cutoff angle 40° code **9088**

Diameter: 51,1mm. **Thickness:** 9mm

Magnetic attach force: 0.6N



Flat Top Snap

Provide even illumination enter to edge. It allows to obtain a square light beam.

- 25°x25° code **9087**

Lumen transmissivity: 90%

Diameter: 50mm. **Thickness:** 2mm

Magnetic attach force: 0.6N








Ster Spot Base

base



Available finishes:



Light Source
Supply
CRI
IP rating
Dimmer
Electrical Class
Application
Diffuser

GU10 bulb
220-240V
if Soraa ≥90
IP66
phase cut with Soraa lamp
II
wall, ground
transparent glass

Power 7,5W is Soraa
Led Colour temp. 2700K / 3000K



				10° lm	white	sand	graphite	aluminium	corten	green
GU10 7,5Wled 7,5We	220-240V	2700K	540	902831002	902831003	902831004	902831005	902831008	9028310016	
		3000K	560	902811002	902811003	902811004	902811005	902811008	9028110016	
				white	sand	graphite	aluminium	corten	green	
GU10 Senza lampadina/Without bulb	220-240V			902801012	902801013	902801014	902801015	902801018	9028010116	

SORAA



Ster Spot Bollard

h500



Available finishes:



Light Source
Supply
CRI
IP rating
Dimmer
Electrical Class
Application
Diffuser

GU10 bulb
220-240V
if Soraa ≥90
IP66
phase cut with Soraa lamp
II
floor
transparent glass

Power 7,5W is Soraa
Led Colour temp. 2700K / 3000K



				10° lm	white	sand	graphite	aluminium	corten	green
GU10 7,5Wled 7,5We	220-240V	2700K	540	902831022	902831023	902831024	902831025	902831028	9028310216	
		3000K	560	902811022	902811023	902811024	902811025	902811028	9028110216	
				white	sand	graphite	aluminium	corten	green	
GU10 Senza lampadina/Without bulb	220-240V			902801032	902801033	902801034	902801035	902801038	9028010316	

SORAA



Ster Spot Bollard

h800



Available finishes:



Light Source
Supply
CRI
IP rating
Dimmer
Electrical Class
Application
Diffuser

GU10 bulb
220-240V
if Soraa ≥90
IP66
phase cut with Soraa lamp
II
wall
transparent glass

Power 7,5W is Soraa
Led Colour temp. 2700K / 3000K



10° lm				white	sand	graphite	aluminium	corten	green
GU10	220-240V	2700K	540	902831042	902831043	902831044	902831045	902831048	9028310416
7,5Wled		3000K	560	902811042	902811043	902811044	902811045	902811048	9028110416
7,5We									
				white	sand	graphite	aluminium	corten	green
GU10	220-240V			902801052	902801053	902801054	902801055	902801058	9028010516
Senza lampadina/Without bulb									

SORAA

Ster Stem Suspension

700mm



Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
220-240V
≥80
only 24V (PWM)
IP66
II, III
ceiling
sandblasted glass

Power 24V 6Wled
220-240V 6Wled - 8We
Led Colour temp. 2700K / 3000K



					white	sand	graphite	aluminium	corten	green
2700K 6Wled 6We	24V	III	diffused	lm	902832112	902832113	902832114	902832115	902832118	902832116
					white	sand	graphite	aluminium	corten	green
3000K 6Wled 6We	24V	III	diffused	lm	902812112	902812113	902812114	902812115	902812118	902812116
					white	sand	graphite	aluminium	corten	green
2700K 6Wled 8We	220-240V	II	diffused	lm	902831112	902831113	902831114	902831115	902831118	902831116
					white	sand	graphite	aluminium	corten	green
3000K 6Wled 8We	220-240V	II	diffused	lm	902811112	902811113	902811114	902811115	902811118	902811116

Ster Stem Suspension

1200mm


Available finishes:



Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
220-240V
≥80
only 24V (PWM)
IP66
II, III
ceiling
sandblasted glass


Power 24V 6Wled
220-240V 6Wled - 8We
Led Colour temp. 2700K / 3000K

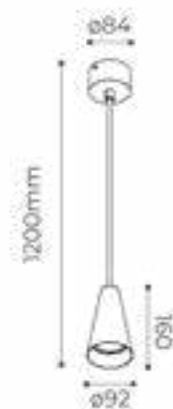

					white	sand	graphite	aluminium	corten	green
2700K 6Wled 8We	24V	III	diffused	lm	902832122	902832123	902832124	902832125	902832128	902832126
3000K 6Wled 8We	24V	III	diffused	lm	902812122	902812123	902812124	902812125	902812128	902812126
2700K 6Wled 8We	220-240V	II	diffused	lm	902831122	902831123	902831124	902831125	902831128	902831126
3000K 6Wled 8We	220-240V	II	diffused	lm	902811122	902811123	902811124	902811125	902811128	902811126



ACCESSORIES




Power supply 16W 220-240V IP65
125x61x31mm

code **9059**




IP 68 Gel Box

code **9080**




Power supply 220-240V IP67
267x79x52mm

code **9049**



Anchor bolts
Ø88x165mm

code **9062**



Power supply 220-240V IP67
267x79x52mm

code **9057**

ACCESSORIES:

code **9059 / 9049 / 9057 / 9080 / 9062**



Nothing

TRACE A LINE IN THE DARK

Trace a line in the dark, enhance the shadows of outdoor spaces, and create the perfect atmosphere.

Elegant, minimal, and perfectly blending into any environment.

Nothing is the element that illuminates without being noticed, designed for those who love light as the true protagonist.

Engineered for in-ground recessed installation, it is available in three heights (500 mm, 1000 mm, 1700 mm) and manufactured from extruded aluminium, anodized and polyester powder-coated for outdoor resistance.

The fixture is equipped with mid-power LEDs, CRI 80, in 2700K or 3000K colour temperatures. IP67 protection is ensured through silicone end caps and a sealed base filled with resin, where the on/off driver is housed.

A 24V version with remote power supply - available as a separate accessory - is also offered.

Tracciare una linea nel buio, esaltare le ombre degli spazi outdoor per creare l'atmosfera perfetta.

Elegante, minimale e perfettamente integrabile in ogni tuo spazio.

Nothing è l'elemento che illumina senza farsi notare, per chi ama la luce protagonista.

Progettato per l'incasso a terra e disponibile in 3 altezze (500mm, 1000mm, 1700mm) è realizzato in alluminio estruso anodizzato e verniciato con polvere di poliestere resistente agli ambienti esterni.

Nothing monta mid- power led CRI80 con colorazione 2700K o 3000K e la protezione IP67 è garantita dalla chiusura tramite tappi di silicone all'estremità e resina nella base stagna dove è alloggiato l'alimentatore on/off, in alternativa è disponibile la versione 24V con l'alimentazione remota da ordinare separatamente.









Nothing

h500



Available finishes:



corten

olive green

Light Source

Supply

Dimmer

CRI

IP rating

Electrical Class

Application

Diffuser

mid power led

24V / 220-240V

only 24V (PWM)

≥80

IP66

II, III

ground, soil

opal resin

Power

24V 7Wled

220-240V 7Wled - 10,8We

Led Colour temp.

2700K / 3000K



				corten	green
2700K 7Wled 7We	24V	III	lm	902932008	9029320016
				corten	green
3000K 7Wled 7We	24V	III	lm	902912008	9029120016
				corten	green
2700K 7Wled 10,8We	220-240V	II	lm	902931008	9029310016
				corten	green
3000K 7Wled 10,8We	220-240V	II	lm	902911008	9029110016

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Nothing

h1000



Available finishes:



corten

olive green

Light Source

Supply

Dimmer

CRI

IP rating

Electrical Class

Application

Diffuser

mid power led

24V / 220-240V

only 24V (PWM)

≥80

IP66

II, III

ground, soil

opal resin

Power

24V 12Wled

220-240V 12Wled - 16,2We

Led Colour temp.

2700K / 3000K



				corten	green
2700K 12Wled 12We	24V	III	lm	902932018	9029320116
				corten	green
3000K 12Wled 12We	24V	III	lm	902912018	9029120116
				corten	green
2700K 12Wled 16,2We	220-240V	II	lm	902931018	9029310116
				corten	green
3000K 12Wled 16,2We	220-240V	II	lm	902911018	9029110116

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Nothing

h1700

Available finishes:



corten

olive green

Light Source

Supply

Dimmer

CRI

IP rating

Electrical Class

Application

Diffuser

mid power led

24V / 220-240V

only 24V (PWM)

≥80

IP66

II, III

ground, soil

opal resin

Power

24V 21Wled

220-240V 21Wled - 24,6We

Led Colour temp.

2700K / 3000K




				corten	green
2700K 21Wled 21We	24V	III	lm	902932028	9029320216
				corten	green
3000K 21Wled 21We	24V	III	lm	902912028	9029120216
				corten	green
2700K 21Wled 24,6We	220-240V	II	lm	902931028	9029310216
				corten	green
3000K 21Wled 24,6We	220-240V	II	lm	902911028	9029110216

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.


La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

ACCESSORIES




Power supply 16W 220-240VIP65
125x61x31mm

code **9059**




Power supply 220-240VIP67
267x79x52mm

code **9049**




Power supply 220-240V IP67
267x79x52mm

code **9057**



2 way - 3 poles terminal block IP68
Ø23x66mm

code **9004**



3-4 way - 4 poles terminal block IP68
53x26x82mm

code **9005**

ACCESSORIES:

code **9059 / 9049 / 9057 / 9004 / 9005**



Gler Sun

LIGHT THROUGH A GLASS REVEALS NEW BEAUTY

Gler Sun is a modern, minimalistic, and at the same time, nostalgically vintage family of products. It comes in various models designed to meet different installation needs.

The clean design, coupled with a variety of colours and evocative lantern-like lines, makes these products thoroughly contemporary and suitable for even the most stringent installations.

For all its versions, the structure is made of mechanically processed primary aluminium alloy, treated with anodisation, and coated.

A stylish feature is the elegant diffuser made of transparent or internally sandblasted borosilicate glass, enhancing its discretion.

Available for various application, the collection includes the Wall model, specifically designed for wall installation.

The LED source is strategically placed in the upper part of the structure head attachment, effectively minimizing the risk of glare.

The Ceiling version an ideal choice for outdoor area lighting, especially when paired with posts. The bollard, crafted from extruded aluminum, comes in two heights: 500mm and 800mm, with options for a single or double light configuration. The base of the bollard is a distinct element, allowing for the post's rotation during installation to adjust its orientation as needed.

Una famiglia di prodotti moderna e minimale dal sapore vintage, Gler Sun è una proposta estremamente decorativa, che si declina in diversi modelli sulla base delle necessità d'installazione.

Il design pulito accostato alla varietà di colori e alle linee evocative della lanterna, rendono questi prodotti assolutamente contemporanei e adatti anche alle installazioni più rigorose.

Per tutte le sue versioni la struttura è in lega di alluminio primaria lavorata meccanicamente, trattata con anodizzazione e poi verniciata.

Caratteristica di stile è l'elegante diffusore in vetro borosilicato trasparente o internamente sabbiato, che ne esalta la discrezione.

Wall studiato per l'installazione a parete, il posizionamento della sorgente led nella parte alta della struttura all'altezza dell'aggancio del diffusore riduce al massimo il rischio di abbagliamento.

Il modello ceiling per installazione a soffitto è ideale per l'illuminazione delle aree esterne associate ai paletti. Il bollard in alluminio estruso, disponibile in due altezze 500mm e 800mm e in due modelli con singola o doppia luce.

La base del bollard è un elemento distinto questo rende possibile ruotare il paletto stesso durante l'installazione per poterne regolare l'orientamento.






















Gler Sun

wall



Available finishes:

	white		corten
	sand		black
	graphite		bronze
	aluminium		olive green <i>*on request</i>

Light Source	mid power led
Supply	220-240V
Dimmer	phase cut
CRI	≥80
Electrical Class	I
IP rating	65
Application	wall
Diffuser	borosilicate glass

Power	10W
Led Colour temp.	2700K - 3000K



				lm	white	sand	graphite	aluminium	corten	black	bronze
2700K	220-240V	399	Transparent Glass	902331002	902331003	902331004	902331005	902331008	9023310011	902331009	
		376	Sandblasted Glass	902331012	902331013	902331014	902331015	902331018	9023310111	902331019	
				lm	white	sand	graphite	aluminium	corten	black	bronze
3000K	220-240V	415	Transparent Glass	902311002	902311003	902311004	902311005	902311008	9023110011	902311009	
		392	Sandblasted Glass	902311012	902311013	902311014	902311015	902311018	9023110111	902311019	

Gler Sun

ceiling

Available finishes:



Light Source mid power led
Supply 220-240V
Dimmer phase cut
CRI ≥80
Electrical Class I
IP rating 65
Application ceiling
Diffuser borosilicate glass


Power 10W
Led Colour temp. 2700K - 3000K



		lm		white	sand	graphite	aluminium	corten	black	bronze
2700K	220-240V	436	Transparent Glass	902331022	902331023	902331024	902331025	902331028	9023310211	902331029
10W@230V		417	Sandblasted Glass	902331032	902331033	902331034	902331035	902331038	9023310311	902331039
		lm		white	sand	graphite	aluminium	corten	black	bronze
3000K	220-240V	455	Transparent Glass	902311022	902311023	902311024	902311025	902311028	9023110211	902311029
10W@230V		435	Sandblasted Glass	902311032	902311033	902311034	902311035	902311038	9023110311	902311039

Gler Sun

bollard h500

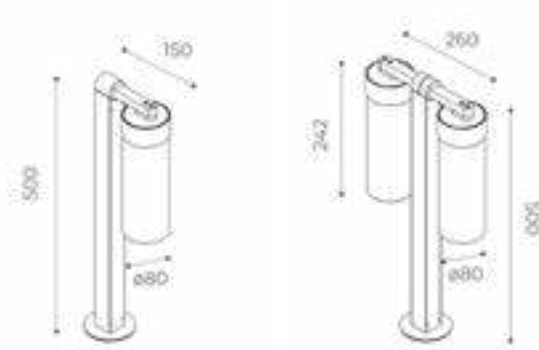

Available finishes:



Light Source mid power led
Supply 220-240V
Dimmer phase cut
CRI ≥80
Electrical Class I
IP rating 65
Application ground
Diffuser borosilicate glass

Power 10W - 2x10W
Led Colour temp. 2700K - 3000K




		lm		white	sand	graphite	aluminium	corten	black	bronze
2700K	220-240V	398	Transparent Glass	902331042	902331043	902331044	902331045	902331048	9023310411	902331049
10W@230V		368	Sandblasted Glass	902331062	902331063	902331064	902331065	902331068	9023310611	902331069
		lm		white	sand	graphite	aluminium	corten	black	bronze
3000K	220-240V	414	Transparent Glass	902311042	902311043	902311044	902311045	902311048	9023110411	902311049
10W@230V		383	Sandblasted Glass	902311062	902311063	902311064	902311065	902311068	9023110611	902311069
		lm		white	sand	graphite	aluminium	corten	black	bronze
2700K	220-240V	803	Transparent Glass	902331082	902331083	902331084	902331085	902331088	9023310811	902331089
2X10W@230V		755	Sandblasted Glass	902331102	902331103	902331104	902331105	902331108	9023311011	902331109
		lm		white	sand	graphite	aluminium	corten	black	bronze
3000K	220-240V	836	Transparent Glass	902311082	902311083	902311084	902311085	902311088	9023110811	902311089
2X10W@230V		787	Sandblasted Glass	902311102	902311103	902311104	902311105	902311108	9023111011	902311109

ACCESSORIES:

code 9062 | anchor bolts Ø88x165mm

Gler Sun

bollard h800

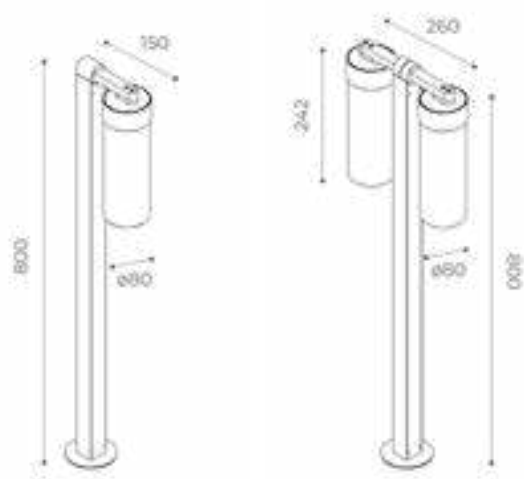

Available finishes:

	white		corten
	sand		black
	graphite		bronze
	aluminium		olive green *on request

Light Source	mid power led
Supply	220-240V
Dimmer	phase cut
CRI	≥80
Electrical Class	I
IP rating	65
Application	ground
Diffuser	borosilicate glass

Power	10W - 2x10W
Led Colour temp.	2700K - 3000K



		lm		white	sand	graphite	aluminium	corten	black	bronze
2700K	220-240V	398	Transparent Glass	902331052	902331053	902331054	902331055	902331058	9023310511	902331059
10W@230V		368	Sandblasted Glass	902331072	902331073	902331074	902331075	902331078	9023310711	902331079

		lm		white	sand	graphite	aluminium	corten	black	bronze
3000K	220-240V	414	Transparent Glass	902311052	902311053	902311054	902311055	902311058	9023110511	902311059
10W@230V		383	Sandblasted Glass	902311072	902311073	902311074	902311075	902311078	9023110711	902311079

		lm		white	sand	graphite	aluminium	corten	black	bronze
2700K	220-240V	803	Transparent Glass	902331092	902331093	902331094	902331095	902331098	9023310911	902331099
2X10W@230V		755	Sandblasted Glass	902331112	902331113	902331114	902331115	902331118	9023311211	902331129

		lm		white	sand	graphite	aluminium	corten	black	bronze
3000K	220-240V	836	Transparent Glass	902311092	902311093	902311094	902311095	902311098	9023110911	902311099
2X10W@230V		787	Sandblasted Glass	902311112	902311113	902311114	902311115	902311118	9023111211	902311129

ACCESSORIES:

code **9062** | anchor bolts Ø88x165mm



Ulisse

BETWEEN WEIGHT AND LIGHTNESS

The pursuit of originality and the authenticity of Made in Italy by Diomede find expression in Ulisse, a new decorative element that seems to emerge from sculpted stone.

Ulisse stands out for its compact and determined character: a solid presence that embraces the light source in a refined dialogue between weight and lightness.

Quarried in Tuscany, from the Cardoso stone caves in the heart of the Apuan Alps Park, the rock is composed of quartz, mica, and chlorite

This extremely durable material resists weathering and impact, making it ideal for outdoor applications.

Its grey-bluish tone, with its subtle lighter veins, together with the textured quality of its stratification, gives Ulisse a timeless elegance in perfect harmony with contemporary architecture.

Available with LED CRI≥80 in 2700K/3000K colour temperature, with integrated or 24V power supply (PWM dimmable), 10W.

La ricerca di originalità e l'autenticità del Made in Italy firmato Diomede trovano espressione in Ulisse, nuovo elemento decorativo che sembra nascere da una roccia scolpita.

Ulisse si distingue per il suo carattere compatto e deciso: una presenza solida che accoglie la sorgente luminosa in un raffinato dialogo tra peso e leggerezza.

Estratta in Toscana, nelle cave di Cardoso nel cuore del Parco delle Alpi Apuane, la roccia che dà forma a Ulisse è composta da quarzo, mica e clorite.

Un materiale straordinariamente resistente, capace di resistere agli agenti atmosferici e agli urti, ideale per applicazioni in esterni.

Il suo colore grigio-bluastrò, percorso da leggere venature più chiare, insieme alla matericità della stratificazione, conferisce a Ulisse un'eleganza senza tempo, perfettamente in sintonia con l'architettura contemporanea.

Disponibile con LED CRI≥80 in colorazione 2700K/3000K, alimentazione integrata o 24V (dimmabile pwm) 10W.














Ulisse

h300



Available finishes:



cardoso

Light Source	mid power led
Supply	24V / 220-240V
Dimmer	24V 8PWM, 230V phase-cut
CRI	≥80
IP rating	IP66
Electrical Class	III, I
Application	ground
Diffuser	sandblasted tempered glass

Power	24V 10Wled / 220-240V 12,6We
Led Colour temp.	2700K / 3000K



lm				
2700K 10Wled 11We	24V	III	444	90273200 M

lm				
3000K 10Wled 11We	24V	III	468	90271200 M

lm				
2700K 10W@230V	220-240V	I	444	90273100 M


lm				
3000K 10W@230V	220-240V	I	468	90271100 M



L'installazione comporta l'utilizzo dell'apposito tirafondi in acciaio INOX (fornito con l'apparecchio).

È necessario prevedere un getto di cemento sotto al prodotto per garantirne la stabilità; è bene verificare la possibilità di installazione in base alla tipologia di superficie disponibile.

Ulisse ha un peso di circa 14Kg, pertanto è indispensabile effettuare un piccolo getto in cemento per dare stabilità all'installazione ed è altresì fondamentale seguire precisamente ogni passaggio dell'installazione per garantire anche l'impatto estetico del prodotto.

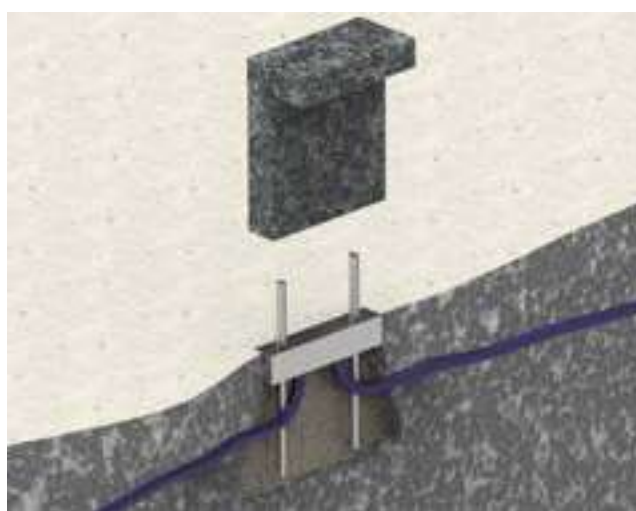

The installation requires the use of the dedicated stainless steel anchor bolts (supplied with the fixture).

A concrete foundation must be provided beneath the product to ensure stability, and the suitability of the installation must be verified according to the type of surface available.

Ulisse weighs approximately 14 kg; it is mandatory to prepare a small concrete foundation to provide stability to the installation. It is also extremely important to follow each installation step precisely in order to preserve the aesthetic impact of the product.





Mimicry

THE ESSENCE OF ABSENCE

Mimicry is a decorative fixture that integrates perfectly into architecture, suitable for wall installation.

The base is made of die-cast aluminium, treated with cataphoresis and a layer of polyester powder paint resistant to outdoor environments.

A key feature is the baked clay cover, with a textured feel, which can be used in its natural state or painted with water-based colours, making it fully customizable by the end user.

- Mimicry is sold ready to be painted; if you want to use it with a natural finish, it must be specified when ordering, and a specific protective treatment will be applied.
- The base of Mimicry is only available in white.

Mimicry è un apparecchio decorativo che si integra perfettamente nell'architettura, adatto all'installazione a parete.

La base è in alluminio pressofuso, con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Caratteristica è la cover in argilla cotta, dal gusto materico, utilizzabile al naturale o verniciabile con colori a base d'acqua, rendendola totalmente personalizzabile dall'utente finale.

- *Mimicry è venduta per essere verniciata, se si vuole utilizzare con effetto naturale va indicato in fase d'ordine, verrà così eseguito un trattamento protettivo specifico.*
- *La base di mimicry è disponibile solo in colore bianco.*





Mimicry Round



Available finishes:



Light Source	mid power led
Supply	220-240V
CRI	≥80
Electrical Class	I
IP rating	65
Application	wall
Diffuser	transparent polycarbonate
Shape	round

Power	220-240v 10Wled - 13We
Led Colour temp.	2700K/3000K
Emission	360°



		lm	<u>natural clay</u>
2700K 10Wled 13We	220-240V	597	901831000

		lm	<u>natural clay</u>
3000K 10Wled 13We	220-240V	629	901811000



Mimicry is sold ready to be painted; if you want to use it with its natural finish, it must be specified when ordering, and a specific protective treatment will be applied. After treatment the fixture can't be painted.

Mimicry è venduta per essere verniciata, se si vuole utilizzare con effetto naturale va indicato in fase d'ordine, verrà così eseguito un trattamento protettivo specifico. Il prodotto trattato non può essere verniciato.

Mimicry Square



Available finishes:



natural clay

Light Source	mid power led
Supply	220-240V
CRI	≥80
Electrical Class	I
IP rating	65
Application	wall
Diffuser	transparent polycarbonate
Shape	square

Power	220-240v 10Wled - 13We
Led Colour temp.	2700K/3000K
Emission	360°



		lm	<u>natural clay</u>
2700K 10Wled 13We	220-240V	593	901831010

		lm	<u>natural clay</u>
3000K 10Wled 13We	220-240V	625	901811010



Mimicry is sold ready to be painted; if you want to use it with its natural finish, it must be specified when ordering, and a specific protective treatment will be applied. After treatment the fixture can't be painted.

Mimicry è venduta per essere verniciata, se si vuole utilizzare con effetto naturale va indicato in fase d'ordine, verrà così eseguito un trattamento protettivo specifico. Il prodotto trattato non può essere verniciato.



Dotlight

DISCRETION AND FUNCTIONALITY

Family of downlight made of die-cast and extruded aluminium characterized by a simple line and recessed optics.

Metal parts follow a cataphoresis treatment and then painted in polyester powder.

Available in three sizes (Ø50, Ø70, Ø110), all with on-off power supply housed in an IP box connected via a special connector for quick replacement.

The 24V version instead allows for centralized dimming with a special remote power supply.

All models can have or a transparent or sandblasted diffuser, fixed with silicone glue through a robotic system to ensure IP protection.

Honeycomb can be placed in a second time and treated as an accessory.

The spring fastening system allows good adaptability to the different types of ceiling.

Famiglia di incassi da soffitto in alluminio pressofuso ed estruso di alluminio da una linea semplice e con la caratteristica di un'ottica arretrata.

Le parti metalliche sono trattate con cataforesi e quindi verniciate in polvere di poliestere.

Disponibile in tre dimensioni (Ø50, Ø70, Ø110), tutti con alimentazione on-off alloggiata in un box IP collegato tramite apposito connettore per una rapida sostituzione.

La versione a 24V permette invece una dimmerazione centralizzata con apposito alimentatore remoto.

L'honeycomb può essere inserito in un secondo momento ed è quindi trattato come accessorio.

Il sistema di fissaggio a molla permette una buona adattabilità alle diverse tipologie di soffitto.








Dotlight

Ø50



Available finishes:



Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 66
Application downlight
Diffuser transparent / sandblated diffuser


Power 24V 2Wled - 3,5We
 220-240V 2Wled - 4We
Led Colour temp.: 2700K/3000k



				lm	white	sand	graphite	aluminium	corten	bronze
2700K 2Wled 3,5We	24V	III	▲ 14°		903332002	903332003	903332004	903332005	903332008	903332009
			▲ 28°		903332012	903332013	903332014	903332015	903332018	903332019
			▲ 45°		903332022	903332023	903332024	903332025	903332028	903332029
			● diffused		903332032	903332033	903332034	903332035	903332038	903332039
3000K 2Wled 3,5We	24V	III	▲ 14°		903312002	903312003	903312004	903312005	903312008	903312009
			▲ 28°		903312012	903312013	903312014	903312015	903312018	903312019
			▲ 45°		903312022	903312023	903312024	903312025	903312028	903312029
			● diffused		903312032	903312033	903312034	903312035	903312038	903312039
				lm	white	sand	graphite	aluminium	corten	bronze
2700K 2Wled 4We	220-240V	II	▲ 14°		903331002	903331003	903331004	903331005	903331008	903331009
			▲ 28°		903331012	903331013	903331014	903331015	903331018	903331019
			▲ 45°		903331022	903331023	903331024	903331025	903331028	903331029
			● diffused		903331032	903331033	903331034	903331035	903331038	903331039
3000K 2Wled 4We	220-240V	II	▲ 14°		903311002	903311003	903311004	903311005	903311008	903311009
			▲ 28°		903311012	903311013	903311014	903311015	903311018	903311019
			▲ 45°		903311022	903311023	903311024	903311025	903311028	903311029
			● diffused		903311032	903311033	903311034	903311035	903311038	903311039

Dotlight

Ø70



Available finishes:



Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 66
Application downlight
Diffuser transparent / sandblated diffuser


Power 24V 5,8Wled - 6,3We
 220-240V 5,8Wled - 6,2We
Led Colour temp.: 2700K/3000k



				lm	white	sand	graphite	aluminium	corten	bronze
2700K 5,8Wled 5We	24V	III	10°		903332042	903332043	903332044	903332045	903332048	903332049
			26°		903332052	903332053	903332054	903332055	903332058	903332059
			52°		903332062	903332063	903332064	903332065	903332068	903332069
			diffused		903332072	903332073	903332074	903332075	903332078	903332079
3000K 5,8Wled 6,3We	24V	III	10°		903312042	903312043	903312044	903312045	903312048	903312049
			26°		903312052	903312053	903312054	903312055	903312058	903312059
			52°		903312062	903312063	903312064	903312065	903312068	903312069
			diffused		903312072	903312073	903312074	903312075	903312078	903312079
				lm	white	sand	graphite	aluminium	corten	bronze
2700K 5,8Wled 6,2We	220-240V	II	10°		903331042	903331043	903331044	903331045	903331048	903331049
			26°		903331052	903331053	903331054	903331055	903331058	903331059
			52°		903331062	903331063	903331064	903331065	903331068	903331069
			diffused		903331072	903331073	903331074	903331075	903331078	903331079
3000K 5,8Wled 6,2We	220-240V	II	10°		903311042	903311043	903311044	903311045	903311048	903311049
			26°		903311052	903311053	903311054	903311055	903311058	903311059
			52°		903311062	903311063	903311064	903311065	903311068	903311069
			diffused		903311072	903311073	903311074	903311075	903311078	903311079

Dotlight

Ø110



Available finishes:



Light Source	power led
Supply	24V / 220-240V
Dimmer	only 24V (PWM)
CRI	≥80
Electrical Class	II, III
IP rating	66
Application	downlight
Diffuser	transparent / sandblated diffuser

Power	24V 9Wled -10,5We 220-240V 9Wled - 12We
Led Colour temp.:	2700K/3000k



				lm	white	sand	graphite	aluminium	corten	bronze
2700K	24V	III	15°		903332082	903332083	903332084	903332085	903332088	903332089
9Wled			36°		903332092	903332093	903332094	903332095	903332098	903332099
10,5We			60°		903332102	903332103	903332104	903332105	903332108	903332109
			diffused		903332112	903332113	903332114	903332115	903332118	903332119


3000K	24V	III	15°		903312082	903312083	903312084	903312085	903312088	903312089
9Wled			36°		903312092	903312093	903312094	903312095	903312098	903312099
10,5We			60°		903312102	903312103	903312104	903312105	903312108	903312109
			diffused		903312112	903312113	903312114	903312115	903312118	903312119

				lm	white	sand	graphite	aluminium	corten	bronze
2700K	220-240V	II	15°		903331082	903331083	903331084	903331085	903331088	903331089
9Wled			36°		903331092	903331093	903331094	903331095	903331098	903331099
12We			60°		903331102	903331103	903331104	903331105	903331108	903331109
			diffused		903331112	903331113	903331114	903331115	903331118	903331119

3000K	220-240V	II	15°		903311082	903311083	903311084	903311085	903311088	903311089
9Wled			36°		903311092	903311093	903311094	903311095	903311098	903311099
12We			60°		903311102	903311103	903311104	903311105	903311108	903311109
			diffused		903311112	903311113	903311114	903311115	903311118	903311119




ACCESSORIES




Power supply 8W 220-240V IP54
44x46x26mm
(for recessed box 9018 and 9019)

code **9037**




Power supply 220-240V
DC 70W IP67
267x79x52mm

code **9049**




Power supply 220-240V
16W IP20
118x52x26mm

code **9006**




Power supply 220-240V
DC 150W IP67 267x79x52mm

code **9057**




Power supply 220-240V
20W IP20 103x67x21mm

code **9007**




Honeycomb Dotlight 50

code **9090**




Power supply 220-240V
50W IP20 190x60x36mm

code **9008**




Honeycomb Dotlight 70

code **9091**



Power supply 16W 220-240V IP65
125x61x31mm

code **9059**



Honeycomb Dotlight 110

code **9092**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9059 / 9049 / 9057**

code **honeycomb dotlight 9090 / 9091 / 9092**



Noctis

ELEGANT PUNCTUALITY

The purity of the lines that trace a simple geometry is the main characteristic of Noctis: a family roof lighting fittings sophisticated in its linearity and lightness.

Available in three different sizes (Ø40, Ø60, Ø80) all with integrated power supply or in 24V version.

Made of high-quality aluminium, turned, anodized and then painted in polyester powder.

Robotically fixed tempered glass with silicone glue.

Ceiling fixing is done using screws and stainless steel side set screws.

La purezza delle linee che tracciano una geometria semplice è la caratteristica di Noctis: famiglia di apparecchi da plafone sofisticata nella sua linearità e leggerezza.

Disponibile in tre formati differenti (Ø40, Ø60, Ø80) tutti con alimentazione integrata o in versione 24V.

Corpo in alluminio di lega primaria tornito, trattato con anodizzazione e successivamente verniciato in polvere di poliestere.

Vetro temprato fissato roboticamente con collante siliconico.

Il fissaggio a soffitto avviene tramite viti e grani laterali in acciaio inox.









Noctis

Ø42



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V / 220-240V
only 24V (PWM)
≥80
IP66
II, III
ceiling
tempered transparent glass

Power 24V 3Wled-4We
220-240V 3Wled-4,5We
Led Colour temp. 2700K / 3000K



				lm	white	sand	graphite	aluminium	corten	green
2700K 2Wled 3We	24V III	11°	▲	with honeycomb	903232002	903232003	903232004	903232005	903232008	903232016
		11°	▲	without honeycomb	903232012	903232013	903232014	903232015	903232018	903232016
		30°	▲	with honeycomb	903232022	903232023	903232024	903232025	903232028	9032320216
		30°	▲	without honeycomb	903232032	903232033	903232034	903232035	903232038	9032320316
		60°	▲	without honeycomb	903232042	903232043	903232044	903232045	903232048	9032320416
3000K 2Wled 3We	24V III	11°	▲	with honeycomb	903212002	903231003	903231004	903231005	903231008	9032310016
		11°	▲	without honeycomb	903212012	903212013	903212014	903212015	903212018	9032120116
		30°	▲	with honeycomb	903212022	903212023	903212024	903212025	903212028	9032120216
		30°	▲	without honeycomb	903212032	903212033	903212034	903212035	903212038	9032120316
		60°	▲	without honeycomb	903212042	903212043	903212044	903212045	903212048	9032120416
				lm	white	sand	graphite	aluminium	corten	green
2700K 2Wled 4We	220-240V II	11°	▲	with honeycomb	903231002	903231003	903231004	903231005	903231008	9032310016
		11°	▲	without honeycomb	903231012	903231013	903231014	903231015	903231018	9032310116
		30°	▲	with honeycomb	903231022	903231023	903231024	903231025	903231028	9032310216
		30°	▲	without honeycomb	903231032	903231033	903231034	903231035	903231038	9032310316
		60°	▲	without honeycomb	903231042	903231043	903231044	903231045	903231048	9032310416
3000K 2Wled 4We	220-240V II	11°	▲	with honeycomb	903211002	903211003	903211004	903211005	903211008	9032110016
		11°	▲	without honeycomb	903211012	903211013	903211014	903211015	903211018	9032110116
		30°	▲	with honeycomb	903211022	903211023	903211024	903211025	903211028	9032110216
		30°	▲	without honeycomb	903211032	903211033	903211034	903211035	903211038	9032110316
		60°	▲	without honeycomb	903211042	903211043	903211044	903211045	903211048	9032110416

Noctis

Ø60



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V / 220-240V
only 24V (PWM)
≥80
IP66
II, III
ceiling
tempered transparent glass

Power 6,3Wled 7,2We
6,3Wled 7,8We
Led Colour temp. 2700K / 3000K



				lm	white	sand	graphite	aluminium	corten	green
2700K 4,2Wled 5We	24V III	15°	▲	with honeycomb	903232052	903232053	903232054	903232055	903232058	9032320516
		15°	▲	without honeycomb	903232062	903232063	903232064	903232065	903232068	9032320616
		26°	▲	with honeycomb	903232072	903232073	903232074	903232075	903232078	9032320716
		26°	▲	without honeycomb	903232082	903232083	903232084	903232085	903232088	9032320816
		60°	▲	without honeycomb	903232092	903232093	903232094	903232095	903232098	9032320916
3000K 4,2Wled 5We	24V III	15°	▲	with honeycomb	903212052	903212053	903212054	903212055	903212058	9032120516
		15°	▲	without honeycomb	903212062	903212063	903212064	903212065	903212068	9032120616
		26°	▲	with honeycomb	903212072	903212073	903212074	903212075	903212078	9032120716
		26°	▲	without honeycomb	903212082	903212083	903212084	903212085	903212088	9032120816
		60°	▲	without honeycomb	903212092	903212093	903212094	903212095	903212098	9032120916
				lm	white	sand	graphite	aluminium	corten	green
2700K 4,2Wled 6,2We	220-240V II	15°	▲	with honeycomb	903231052	903231053	903231054	903231055	903231058	9032310516
		15°	▲	without honeycomb	903231062	903231063	903231064	903231065	903231068	9032310616
		26°	▲	with honeycomb	903231072	903231073	903231074	903231075	903231078	9032310716
		26°	▲	without honeycomb	903231082	903231083	903231084	903231085	903231088	9032310816
		60°	▲	without honeycomb	903231092	903231093	903231094	903231095	903231098	9032310916
3000K 4,2Wled 6,2We	220-240V II	15°	▲	with honeycomb	903211052	903211053	903211054	903211055	903211058	9032110516
		15°	▲	without honeycomb	903211062	903211063	903211064	903211065	903211068	9032110616
		26°	▲	with honeycomb	903211072	903211073	903211074	903211075	903211078	9032110716
		26°	▲	without honeycomb	903211082	903211083	903211084	903211085	903211088	9032110816
		60°	▲	without honeycomb	903211092	903211093	903211094	903211095	903211098	9032110916

Noctis

Ø80



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser


cob led
24V / 220-240V
only 24V (PWM)
≥80
IP66
II, III
ceiling
tempered transparent glass

Power 9Wled-10We
9Wled- 11We
Led Colour temp. 2700K / 3000K




				lm	white	sand	graphite	aluminium	corten	green
2700K 6,3Wled 7We	24V III	15°	▲	with honeycomb	903232102	903232103	903232104	903232105	903232108	9032321016
		15°	▲	without honeycomb	903232112	903232113	903232114	903232115	903232118	9032321116
		36°	▲	with honeycomb	903232122	903232123	903232124	903232125	903232128	9032321216
		36°	▲	without honeycomb	903232132	903232133	903232134	903232135	903232138	9032321316
		60°	▲	without honeycomb	903232142	903232143	903232144	903232145	903232148	9032321416
3000K 6,3Wled 7We	24V III	15°	▲	with honeycomb	903212102	903212103	903212104	903212105	903212108	9032121016
		15°	▲	without honeycomb	903212112	903212113	903212114	903212115	903212118	9032121116
		36°	▲	with honeycomb	903212122	903212123	903212124	903212125	903212128	9032121216
		36°	▲	without honeycomb	903212132	903212133	903212134	903212135	903212138	9032121316
		60°	▲	without honeycomb	903212142	903212143	903212144	903212145	903212148	9032121416
				lm	white	sand	graphite	aluminium	corten	green
2700K 6,3Wled 8We	220-240V II	15°	▲	with honeycomb	903231102	903231103	903231104	903231105	903231108	9032311016
		15°	▲	without honeycomb	903231112	903231113	903231114	903231115	903231118	9032311116
		36°	▲	with honeycomb	903231122	903231123	903231124	903231125	903231128	9032311216
		36°	▲	without honeycomb	903231132	903231133	903231134	903231135	903231138	9032311316
		60°	▲	without honeycomb	903231142	903231143	903231144	903231145	903231148	9032311416
3000K 6,3Wled 8We	220-240V II	15°	▲	with honeycomb	903211102	903211103	903211104	903211105	903211108	9032111016
		15°	▲	without honeycomb	903211112	903211113	903211114	903211115	903211118	9032111116
		36°	▲	with honeycomb	903211122	903211123	903211124	903211125	903211128	9032111216
		36°	▲	without honeycomb	903211132	903211133	903211134	903211135	903211138	9032111316
		60°	▲	without honeycomb	903211142	903211143	903211144	903211145	903211148	9032111416

ACCESSORIES




Power supply 8V 220-240V IP54
44x46x26mm
(for recessed box 9018 and 9019)

code **9037**




Power supply 220-240V
70W IP67
267x79x52mm

code **9049**




Power supply 220-240V
16W IP20
118x52x26mm

code **9006**




Power supply 220-240V
DC 70W IP67
267x79x52mm

code **9057**




Power supply 220-240V
20W IP20 103x67x21mm

code **9007**



Power supply 220-240V
50W IP20 190x60x36mm

code **9008**



Power supply 16W 220-240V IP65
125x61x31mm

code **9059**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9059 / 9049 / 9057**



Itaca

CONTEMPORANEITY AND MINIMALISM

The purity of the lines that define a simple geometry makes ITACA a wall-mounted fixture sophisticated in its linearity and lightness.

Available in four different sizes (45, 90, 135, 180) with power ratings range from 1.9 W to 8.7 W in the largest version, all models feature an integrated power supply (on/off for the 45 model, phase-cut dimmable for the others) also available in 24V version.

The body is made of primary-alloy aluminium, treated with anodisation and coated with polyester powder.

The textured, sandblasted glass ensures optimal light uniformity and is robotically sealed using silicone adhesive.

IP66 protection is ensured by polyurethane resin that fully isolates all sensitive electronic components.

La purezza delle linee che tracciano una geometria semplice, queste caratteristiche rendono ITACA una lampada a parete sofisticata nella sua linearità e leggerezza.

Disponibile in 4 formati differenti (45, 90, 135, 180) e con potenze fra gli 1,9W e 8,7W nella versione più grande, tutti con alimentazione integrata (on /off per il modello 45, dimmerabile phase-cut per gli altri) o in versione 24V.

Corpo in alluminio di lega primaria, trattato con anodizzazione e verniciato in polvere di poliestere.

Vetro texturizzato e sabbiato per una migliore uniformità emissiva, fissato roboticamente con collante siliconico.

La protezione IP66 è garantita dalla resina poliuretanica che isola perfettamente tutte le parti elettroniche sensibili.









Itaca 45

wall



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

mid power led
24V / 220-240V
only 24V (PWM)
≥80
IP66
II, III
wall
texturized sandblasted glass


Power 24V 1,5Wled-1,9We
220-240V 1,5Wled - 3,3We
Led Colour temp. 2700K / 3000K



				white	sand	graphite	aluminium	corten	green
2700K 1,5Wled 1,9We	24V	III	lm	903032002	903032003	903032004	903032005	903032008	9030320016
				white	sand	graphite	aluminium	corten	green
3000K 1,5Wled 1,9We	24V	III	lm	903012002	903012003	903012004	903012005	903012008	9030120016
				white	sand	graphite	aluminium	corten	green
2700K 1,5Wled 3,3We	220-240V	II	lm	903031002	903031003	903031004	903031005	903031008	9030310016
				white	sand	graphite	aluminium	corten	green
3000K 1,5Wled 3,3We	220-240V	II	lm	903011002	903011003	903011004	903011005	903011008	9030110016

Itaca 90

wall



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Dimmer
Electrical Class
Application
Diffuser

mid power led
24V / 220-240V
only 24V (PWM)
≥80
IP66
phase cut 220-240V
II, III
wall
texturized sandblasted glass


Power 24V 3,4Wled-4,1We
220-240V 3,4Wled - 4,8We
Led Colour temp. 2700K / 3000K



				white	sand	graphite	aluminium	corten	green
2700K 3,4Wled 4,1We	24V	III	lm	903032012	903032013	903032014	903032015	903032018	9030320116
				white	sand	graphite	aluminium	corten	green
3000K 3,4Wled 4,1We	24V	III	lm	903012012	903012013	903012014	903012015	903012018	9030120116
				white	sand	graphite	aluminium	corten	green
2700K 3,4Wled 4,8We	220-240V	II	lm	903031012	903031013	903031014	903031015	903031018	9030310116
				white	sand	graphite	aluminium	corten	green
3000K 3,4Wled 4,8We	220-240V	II	lm	903011012	903011013	903011014	903011015	903011018	9030110116

Itaca 135

wall



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Dimmer
Electrical Class
Application
Diffuser

mid power led
24V / 220-240V
only 24V (PWM)
≥80
IP66
phase cut 220-240V
II, III
wall
texturized sandblasted glass


Power 24V 4,9Wled-6We
220-240V 4,9Wled - 6,5We
Led Colour temp. 2700K / 3000K



				white	sand	graphite	aluminium	corten	green
2700K 4,9Wled 6We	24V	III	lm	903032022	903032023	903032024	903032025	903032028	9030320216
				white	sand	graphite	aluminium	corten	green
3000K 4,9Wled 6We	24V	III	lm	903012022	903012023	903012024	903012025	903012028	9030120216
				white	sand	graphite	aluminium	corten	green
2700K 4,9Wled 6,5We	220-240V	II	lm	903031022	903031023	903031024	903031025	903031028	9030310216
				white	sand	graphite	aluminium	corten	green
3000K 4,9Wled 6We	220-240V	II	lm	903011022	903011023	903011024	903011025	903011028	9030110216

Itaca 180

wall

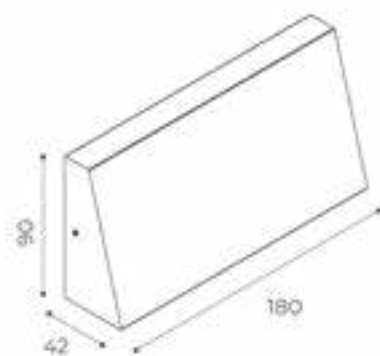

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Dimmer
Electrical Class
Application
Diffuser

mid power led
24V / 220-240V
only 24V (PWM)
≥80
IP66
phase cut 220-240V
II, III
wall
texturized sandblasted glass


Power 24V 6,6Wled-8We
220-240V 6,6Wled - 8,7We
Led Colour temp. 2700K / 3000K



				white	sand	graphite	aluminium	corten	green
2700K 6,6Wled 8We	24V	III	lm	903032032	903032033	903032034	903032035	903032038	9030320316
3000K 6,6Wled 8We	24V	III	lm	903012032	903012033	903012034	903012035	903012038	9030120316
2700K 6,6Wled 8,7We	220-240V	II	lm	903031032	903031033	903031034	903031035	903031038	9030310316
3000K 6,6Wled 8,7We	220-240V	II	lm	903011032	903011033	903011034	903011035	903011038	9030110316




ACCESSORIES




Power supply 16W 220-240V IP65
125x61x31mm

code **9059**




Recessed box
71x71x53,5mm
For Itaca 90 and 135

code **9018**




Power supply 220-240V DC 70W
IP67
267x79x52mm

code **9049**




Recessed box
74x106x53,5mm
For Itaca 135 and 180

code **9019**



Power supply 220-240V DC 150W
IP67
267x79x52mm

code **9057**



Recessed box
74X132X53,5mm
For Itaca 180

code **9089**

ACCESSORIES:

code **9059 / 9049 / 9057 / 9018 / 9019 / 9089**



Metoo

EMOTION IN LIGHT

Metoo Wall or ceiling fixture made of high-quality aluminum, treated with cataphoresis and coated with a layer of polyester powder resistant to outdoor environments.

Minimalistic and elegant, with compact dimensions to easily integrate into all architectural designs.

The LED module, available in 2700K and 3000K colour temperatures, is silicon-sealed inside a transparent capsule attached to the body.

The light is reflected and diffused, making it a functional and discreet fixture.

Apparecchio da parete o soffitto in alluminio di primaria qualità, con trattamento di cataforesi e rivestito da uno strato di polvere di poliestere resistente agli ambienti esterni.

Minimale ed elegante, dalle ridotte dimensioni per integrarsi facilmente in tutte le architetture.


Il modulo led, disponibile nelle colorazioni 2700K e 3000K, è siliconato all'interno di una capsula trasparente fissata al corpo, la luce è riflessa e diffusa, caratteristica che lo rende un apparecchio funzionale e discreto.





Metoo

wall

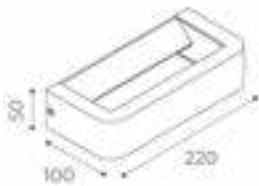

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser

mid power led
220-240V
≥80
IP65
I
ceiling, wall
tempered sandblasted glass


Power
Led Colour temp. 220-240V 10W@230V
2700K / 3000K



		lm	white	sand	graphite	aluminium	corten	green
2700K 10W@230V	220-240V	444	900231042	900231043	900231044	900231045	900231048	9002310416
		lm	white	sand	graphite	aluminium	corten	green
3000K 10W@230V	220-240V	468	900211042	900211043	900211044	900211045	900211048	9002110416

Metoo

bollard

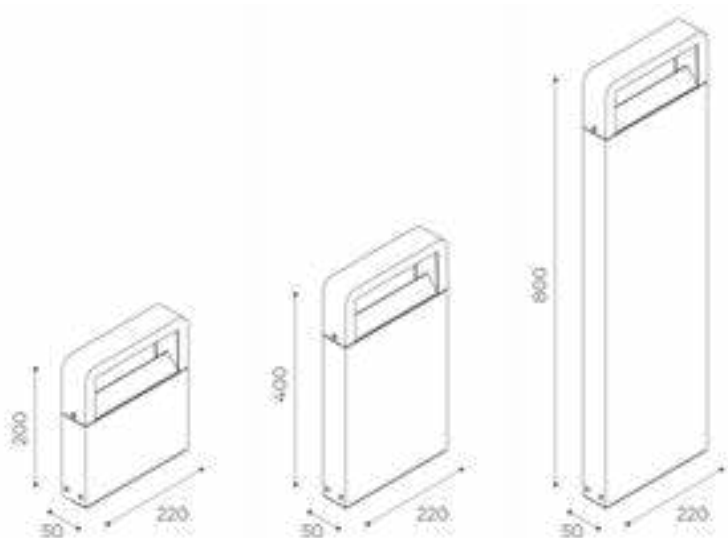

Available finishes:



Light Source
Supply
CRI
Dimmer
IP rating
Electrical Class
Application
Diffuser

mid power led
220-240V
≥80
phase-cut
IP65
I
floor /ground
sandblasted glass

Power
Led Colour temp.


220-240V 10Wled - 12,6We
2700K / 3000K



H200		lm	white	sand	graphite	aluminium	corten	green
2700K 10Wled 12,6We	220-240V	444	900231012	900231013	900231014	900231015	900231018	900231016
3000K 10Wled 12,6We	220-240V	468	900211012	900211013	900211014	900211015	900211018	900211016
H400		lm	white	sand	graphite	aluminium	corten	green
2700K 10Wled 12,6We	220-240V	444	900231022	900231023	900231024	900231025	900231028	9002310216
3000K 10Wled 12,6We	220-240V	468	900211022	900211023	900211024	900211025	900211028	9002110216
H800		lm	white	sand	graphite	aluminium	corten	green
2700K 10Wled 12,6We	220-240V	444	900231032	900231033	900231034	900231035	900231038	9002310316
3000K 10Wled 12,6We	220-240V	468	900211032	900211033	900211034	900211035	900211038	9002110316




ACCESSORIES



Anchor bolts
219x49 (90max) x 175mm

code **9042**



3-4 way - 4 poles terminal block IP68
53x26x82mm

code **9005**

ACCESSORIES:

code **9042 / 9005**





Eloise

DESIGNED TO RAISE EMOTION

Eloise is a wall lighting fixture with 360° radial emission, featuring a clean and comfortable design.

Made of die-cast aluminum with a cataphoresis treatment and a layer of polyester powder coating, it is resistant to outdoor environments.

Available with a white or black internal reflector, it is ideal for wall or ceiling installation, providing comfortable lighting with the option to choose a dark reflector.

The power supply is integrated, and the LED board is equipped with Mid-power LEDs in 2700K or 3000K.

Eloise è un apparecchio d'illuminazione da parete a emissione radiale 360° dal design pulito e confortevole, in alluminio pressofuso trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Disponibile con riflettore interno bianco o nero, è ideale per installazione a parete ma anche a soffitto offrendo un'illuminazione confortevole grazie alla possibilità di scegliere la parabola scura.

L'alimentatore è integrato e la scheda Led equipaggiata con Mid-power led 2700K o 3000K.










Eloise

white and black reflector



Available finishes:

	white
	sand
	graphite
	aluminium
	corten
	olive green <i>*on request</i>

Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

Shape

mid power led
220-240V / 24V
only 24V (PWM)
≥80
IP65
II, III
wall, ceiling
polycarbonate UV resistant
diffuser. White or black internal
reflector
round

Power
Led Colour temp.
Emission

220-240V- 10Wled 13We
2700K/3000K
360°



			lm	white	sand	graphite	aluminium	corten
2700K	220-240V	white reflector	856	901431002	901431003	901431004	901431005	901431008
10Wled		black reflector	413	901431012	901431013	901431014	901431015	901431018
13We								

			lm	white	sand	graphite	aluminium	corten
2700K	24V III	white reflector	856	901432002	901432003	901432004	901432005	901432008
10Wled		black reflector	413	901432012	901432013	901432014	901432015	901432018

			lm	white	sand	graphite	aluminium	corten
3000K	220-240V	white reflector	900	901411002	901411003	901411004	901411005	901411008
10Wled		black reflector	437	901411012	901411013	901411014	901411015	901411018
13We								

			lm	white	sand	graphite	aluminium	corten
3000K	24V III	white reflector	955	901412002	901412003	901412004	901412005	901412008
10Wled		black reflector	413	901412012	901412013	901412014	901412015	901412018





Lucignolo

ESSENTIAL LIGHT AND PURE LINES BLEND WITH TIMELESS ALLURE

Elegant fixture for installation on a solid wall or floor surface. With soft light emission, Lucignolo aspires to be not only a functional fixture but also a decorative element, thanks to the range of painted aluminium or steel covers with elegant PVD finishes.

This treatment offer customers the chance to experiment with particularly refined colours such as gold and bronze in glossy or matt finishes.

The structure is made of die-cast aluminium, treated with electrophoresis, and coated with polyester powder. Inox model is the only suitable for floor installation.

Equipped with mid power led in two colours 2700K and 3000K.

Elegante apparecchio per l'installazione su superficie solida a parete o pavimento.

Dall'emissione luminosa morbida, Lucignolo aspira ad essere oltre che un apparecchio di funzione anche un elemento decorativo, grazie alla gamma di cover in alluminio verniciate o in acciaio con eleganti finiture PVD, trattamento che offre la possibilità di osare con colori particolarmente ricercati come l'oro e il bronzo in finitura lucida o opaca.

La struttura è in alluminio pressofuso, trattato con bagno di cataforesi e verniciato con polvere poliestere. Il modello in INOX è l'unico della gamma installabile a pavimento.

Equipaggiato mid power led in due colorazioni 2700K e 3000K.









Lucignolo

mono emission



Available finishes:

	white		gold
	sand		gold matt
	graphite		bronze
	aluminium		bronze matt
	corten		olive green <i>*on request</i>

Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application wall
Diffuser polycarbonate diffuser

Power 24V 3Wled
 220-240V 3Wled - 4,7We
Led Colour temp. 2700K/3000K



2700K 24V III lm 294
3Wled

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902232002	902232003	902232004	902232005	902232008	9022320012	9022320013	9022320014	9022320015

3000K 24V III lm 303
3Wled

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902212002	902212003	902212004	902212005	902212008	9022120012	9022120013	9022120014	9022120015

2700K 220-240V II lm 294
3Wled / 4,7 We


white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902231002	902231003	902231004	902231005	902231008	9022310012	9022310013	9022310014	9022310015

3000K 220-240V II lm 303
3Wled / 4,7 We

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902211002	902211003	902211004	902211005	902211008	9022110012	9022110013	9022110014	9022110015

Lucignolo

double emission



Available finishes:

	white		gold
	sand		gold matt
	graphite		bronze
	aluminium		bronze matt
	corten		olive green <i>*on request</i>

Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application wall
Diffuser polycarbonate diffuser

Power 24V 2x3Wled
 220-240V 2x3Wled - 8We
Led Colour temp. 2700K/3000K



2700K 24V III lm 588
2x3Wled

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902232012	902232013	902232014	902232015	902232018	9022320112	9022320113	9022320114	9022320115

3000K 24V III lm 606
2x3Wled

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902212012	902212013	902212014	902212015	902212018	9022120112	9022120113	9022120114	9022120115

2700K 220-240V II lm 588
2x3Wled / 8 We

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902231012	902231013	902231014	902231015	902231018	9022310112	9022310113	9022310114	9022310115

3000K 220-240V II lm 606
2x3Wled / 8 We

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902211012	902211013	902211014	902211015	902211018	9022110112	9022110113	9022110114	9022110115

Lucignolo Inox

mono emission



Available finishes:




inox

Light Source
Supply
Dimmer
CRI
Electrical Class
IP rating
Application
Diffuser

mid power led
24V / 220-240V
only 24V (PWM)
≥80
II, III
67
floor
polycarbonate diffuser

Power
Led Colour temp.

24V 3Wled
220-240V 3Wled - 4,7We
2700K/3000K



			lm	inox	
2700K 3 Wled	24V	III	294	Mono emission	902232001
			lm	inox	
3000K 3 Wled	24V	III	303	Mono emission	902212001
			lm	inox	
2700K 4,7 We	220-240V	II	294	Mono emission	902231001
			lm	inox	
3000K 4,7 We	220-240V	II	303	Mono emission	902211001

Lucignolo Inox

double emission



Available finishes:



inox

Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 67
Application floor
Diffuser polycarbonate diffuser


Power 24V 2x3Wled
220-240V 2x3Wled - 8We
Led Colour temp. 2700K/3000K



			lm		inox
2700K 2x3 Wled	24V	III	588	Double emission	902232011
			lm		inox
3000K 2x3 Wled	24V	III	656	Double emission	902212011
			lm		inox
2700K 8 We	220-240V	II	588	Double emission	902231011
			lm		inox
3000K 8 We	220-240V	II	656	Double emission	902211011




ACCESSORIES




*Recessed box
83,5x108x73mm*

code **9019**




*Power supply 16W 220-240V
125x61x31mm*

code **9059**



*Power supply 220-240V
267x79x52mm*

code **9049**



*Power supply 220-240V
150W IP67 267x79x52mm*

code **9057**

ACCESSORIES:

code 9019 / 9059 / 9049 / 9057



Talon

LIGHT THE BOND BETWEEN SPACE AND INDIVIDUAL

Talon is a compact wall-mounted lighting fixture, available in single or dual emission and in two different sizes.

Made of die-cast and extruded aluminum with cataphoresis treatment and a layer of polyester powder coating, it is resistant to outdoor environments.

The tempered and silk-screened glass diffusers are bonded using a robotic system to ensure IP protection.

It features recessed optics and is equipped with a low-luminance screen to minimize glare.

The Power LED model comes with a transparent, silk-screened tempered glass diffuser, while the Mid-power LED model is provided with sandblasted glass to ensure uniform light emission.

In the 'recessed' version, the front frame is made of white-painted stainless steel, and installation is carried out using stainless steel springs for false ceilings, or alternatively with a casing for solid walls.

Talon è un apparecchio per installazione a parete compatto, disponibile con mono o bi-emissione in due diverse misure.

In alluminio pressofuso ed estruso trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni, i diffusori in vetro temprato e serigrafato sono incollati tramite sistema robotico a garanzia della tenuta IP.

Caratterizzato da ottica arretrata e dotato di schermo a bassa luminanza per ridurre al massimo l'abbagliamento.

Per il modello con Power Led il diffusore è in vetro serigrafato trasparente temprato, mentre il modello Mid-power Led viene fornito con vetri sabbiati per garantire un'emissione luminosa omogenea.


Nella versione "recessed" la ghiera frontale è realizzata in acciaio INOX verniciato bianco, l'installazione avviene mediante delle molle in acciaio inox per i controsoffitti o in alternativa con casafirma per il muro pieno.






Talon Wall

monoemission



Available finishes:



Light Source power led / mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser transparent glass / sandblasted

Power 220-240V 8,2Wled 10,7We
Led Colour temp. 4,8Wled 5,8We
 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K	220-240V	19°	756	901131032	901131033	901131034	901131035	901131038	901131036
8,2Wled		32°	760	901131042	901131043	901131044	901131045	901131048	901131046
10,7 We		65°	722	901131052	901131053	901131054	901131055	901131058	901131056

2700K	220-240V	diffused	481	901131102	901131103	901131104	901131105	901131108	901131106
4,8 Wled									
5,8 We									

			lm	white	sand	graphite	aluminium	corten	green
3000K	220-240V	19°	796	901111032	901111033	901111034	901111035	901111038	901111036
8,2Wled		32°	800	901111042	901111043	901111044	901111045	901111048	901111046
10,7 We		65°	760	901111052	901111053	901111054	901111055	901111058	901111056

3000K	220-240V	diffused	506	901111102	901111103	901111104	901111105	901111108	901111106
4,8 Wled									
5,8 We									

Talon Wall

biemission



Available finishes:




Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
220-240 V
upon request
≥80
IP65
I
wall
transparent glass

Power
Led Colour temp.


220-240V 2x8,2Wled 21,4We
2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K 2x8,2Wled 2x10,7 We	220-240V	19°	2x756	901131002	901131003	901131004	901131005	901131008	9011310016
		32°	2x760	901131012	901131013	901131014	901131015	901131018	9011310116
		65°	2x722	901131022	901131023	901131024	901131025	901131028	9011310216
			lm	white	sand	graphite	aluminium	corten	green
3000K 2x8,2Wled 2x10,7 We	220-240V	19°	2x796	901111002	901111003	901111004	901111005	901111008	9011110016
		32°	2x800	901111012	901111013	901111014	901111015	901111018	9011110116
		65°	2x760	901111022	901111023	901111024	901111025	901111028	9011110216

Talon Wall

biemission h100



Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green


Light Source mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser transparent glass
Shape rectangular

Power 220-240V 2x4,8Wled 11,6We
Led Colour temp. 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K	220-240V	diffused	2x481	901131112	901131113	901131114	901131115	901131118	901131116
2x4,8 Wled									
2x5,8 We									
			lm	white	sand	graphite	aluminium	corten	green
3000K	220-240V	diffused	2x506	901111112	901111113	901111114	901111115	901111118	901111116
2x4,8 Wled									
2x5,8 We									

Talon Roof



Available finishes:



Light Source power led / mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application roof
Diffuser transparent glass / sandblasted

Power 220-240V 8,2Wled 10,7
 4,8Wled 5,8We
Led Colour temp. 2700K / 3000K




			lm	white	sand	graphite	aluminium	corten	green
2700K 8,2Wled 10,7 We	220-240V	19°	756	901131122	901131123	901131124	901131125	901131128	9011311216
		32°	760	901131132	901131133	901131134	901131135	901131138	9011311316
		65°	722	901131142	901131143	901131144	901131145	901131148	9011311416

2700K 4,8 Wled 5,8 We	220-240V	diffused	481	901131152	901131153	901131154	901131155	901131158	9011311516
-----------------------------	----------	----------	-----	-----------	-----------	-----------	-----------	-----------	------------

			lm	white	sand	graphite	aluminium	corten	green
3000K 8,2Wled 10,7 We	220-240V	19°	796	901111122	901111123	901111124	901111125	901111128	9011111216
		32°	800	901111132	901111133	901111134	901111135	901111138	9011111316
		65°	760	901111142	901111143	901111144	901111145	901111148	9011111416

3000K 4,8 Wled 5,8 We	220-240V	diffused	506	901111152	901111153	901111154	901111155	901111158	9011111516
-----------------------------	----------	----------	-----	-----------	-----------	-----------	-----------	-----------	------------

Talon Recessed

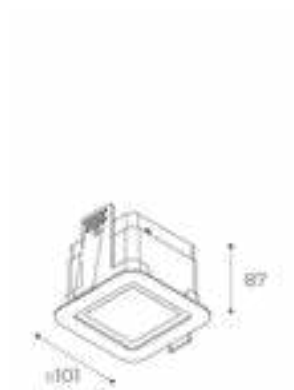

Available finishes:



white

Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser


power led / mid power led
220-240V
upon request
≥80
IP65
II
ceiling
transparent glass / sandblasted

Power

220-240V 8,2Wled 10,7
4,8Wled 5,8We

Led Colour temp.

2700K / 3000K




			lm	white
2700K	220- 240V	19°	756	901131162
8,2 Wled		32°	760	901131172
10,7 We		65°	722	901131182

2700K	220- 240V	diffused	481	901131192
4,8 Wled				
5,8 We				

			lm	white
3000K	220- 240V	19°	796	901111162
8,2 Wled		32°	800	901111172
10,7 We		65°	760	901111182

3000K	220- 240V	diffused	506	901111192
4,8 Wled				
5,8 We				

ACCESSORIES



Metal box for concrete installation
262x265x125mm

code **9078**



ACCESSORIES:

code **9078**



Divar

ILLUMINATING MEANS GIVING PLACE

Divar is a compact wall-mounted lighting fixture, available in single or dual emission and in two different sizes.

Made of die-cast and extruded aluminum with cataphoresis treatment and a layer of polyester powder coating, it is resistant to outdoor environments.

The tempered and silk-screened glass diffusers are bonded using a robotic system to ensure IP protection.

It features recessed optics and is equipped with a low-luminance screen to minimize glare.

The Power LED model comes with a transparent, silk-screened tempered glass diffuser, while the Mid-power LED model is provided with sandblasted glass to ensure uniform light emission.

In the 'recessed' version, the front frame is made of white-painted stainless steel, and installation is carried out using stainless steel springs for false ceilings, or alternatively with a casing for solid walls.

Divar è un apparecchio per installazione a parete compatto, disponibile in mono o bi-emissione in due diverse misure.

In alluminio pressofuso ed estruso trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni, i diffusori in vetro temprato e serigrafato sono incollati tramite sistema robotico a garanzia della tenuta IP.

Caratterizzato da ottica arretrata e dotato di schermo a bassa luminanza per ridurre al massimo l'abbagliamento.

Per il modello con Power Led il diffusore è in vetro serigrafato trasparente temprato, mentre il modello con Mid-power Led viene fornito con vetri sabbiati per garantire un'emissione luminosa omogenea.

Nella versione "recessed" la ghiera frontale è realizzata in acciaio INOX verniciato bianco, l'installazione avviene mediante delle molle in acciaio inox per i controsoffitti o in alternativa con casasaforma per il muro pieno










Divar

wall monoemission



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led / mid power led
220-240V
upon request
≥80
IP65
I
wall
transparent glass
sanblasted glass

Power

220-240V 12,1Wled 15,4We
5,7Wled, 7,2 We

Led Colour temp.

2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K	220-240V	19°	1095	901032012	901032013	901032014	901032015	901032018	901032016
12,1Wled		32°	1118	901031122	901031123	901031124	901031125	901031128	901031126
15,4 We		65°	1080	901031132	901031133	901031134	901031135	901031138	901031136


2700K	220-240V	diffused	501	901031022	901031023	901031024	901031025	901031028	901031026
5,7 Wled									
7,2 We									

			lm	white	sand	graphite	aluminium	corten	green
3000K	220-240V	19°	1153	901011012	901011013	901011014	901011015	901011018	901011016
12,1Wled		32°	1177	901011122	901011123	901011124	901011125	901011128	901011126
15,4 We		65°	1137	901011132	901011133	901011133	901011134	901011138	901011136

3000K	220-240V	diffused	527	901011022	901011023	901011024	901011025	901011028	901011026
5,7 Wled									
7,2 We									

Divar

wall double emission



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
220-240V
upon request
≥80
IP65
I
wall
transparent glass

Power
Led Colour temp.


220-240V 2x12,1Wled 29,7We
2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K 2x12,1Wled 2x15,4 We	220-240V	19°	2x1095	901031002	901031003	901031004	901031005	901031008	9010310016
		32°	2x1118	901031102	901031103	901031104	901031105	901031108	9010311016
		65°	2x1080	901031112	901031113	901031114	901031115	901031118	9010311116
3000K 2x12,1Wled 2x15,4 We	220-240V	19°	2x1153	901011002	901011003	901011004	901011005	901011008	9010110016
		32°	2x1177	901011102	901011103	901011104	901011105	901011108	9010111016
		65°	2x1137	901011112	901011113	901011114	901011115	901011118	9010111116

Divar

wall double emission h100



Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green


Light Source mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser sandblasted

Power 220-240V 2x5,7Wled 14,4We
Led Colour temp. 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K 2x5,7 Wled 2x7,2 We	220-240V	diffused	 2x501	901031032	901031033	901031034	901031035	901031038	9010310316
3000K 2x5,7 Wled 2x7,2 We	220-240V	diffused	 2x527	901011032	901011033	901011034	901011035	901011038	9010110316

Divar Roof



Available finishes:




Light Source power led / mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application roof
Diffuser transparent glass / sandblasted

Power 220-240V 12,1Wled 15,4We
 5,7Wled 7,2 We
Led Colour temp. 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K 12,1Wled 15,4 We	220-240V	19°	1095	901031042	901031043	901031044	901031045	901031048	901031046
		32°	1118	901031062	901031063	901031064	901031065	901031068	901031066
		65°	1080	901031072	901031073	901031074	901031075	901031078	901031076
		diffused	501	901031052	901031053	901031054	901031055	901031058	901031056
			lm	white	sand	graphite	aluminium	corten	
3000K 12,1Wled 15,4 We	220-240V	19°	1153	901011042	901011043	901011044	901011045	901011048	901011046
		32°	1177	901011062	901011063	901011064	901011065	901011068	901011066
		65°	1137	901011072	901011073	901011074	901011075	901011078	901011076
		diffused	527	901011052	901011053	901011054	901011055	901011058	901011056

Divar Recessed

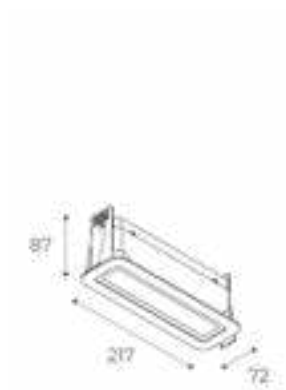

Available finishes:



white

Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led / mid power led
220-240V
upon request
≥80
IP65
II
ceiling
transparent glass / sandblasted

Power

Led Colour temp.

220-240V 12,1Wled 15,4We
5,7Wled 7,2 We
2700K / 3000K




			lm	white
2700K	220-240V	19°	1095	901031142
12,1Wled		32°	1118	901031152
15,4 We		65°	1080	901031162

2700K	220-240V	diffused	501	901031172
5,7 Wled				
7,2 We				

			lm	white
3000K	220-240V	19°	1153	901011142
12,1Wled		32°	1177	901011152
15,4 We		65°	1137	901011162

3000K	220-240V	diffused	527	901011172
5,7 Wled				
7,2 We				

ACCESSORIES



Metal box for concrete installation
385x162x125mm

code **9079**



ACCESSORIES:

code **9079**



Root

LIGHT REVEALS NATURE AS A WONDERFUL ARCHITECTURE

It is a linear fixture for wall installation, featuring an unusual and minimal design. Made of extruded aluminium with cataphoresis treatment and a layer of polyester powder paint resistant to outdoor environments.

It is characterized by being directional, thanks to a joint placed on a pivot between the body and the base, allowing for rotation.

Equipped with mid-power LED in 2800/3150K colour temperature, attached to the body with two-component resin to ensure its IP protection.

Available for installation on both sides (right and left), in low voltage, and in the IP20 version with an integrated power supply.


Root è un apparecchio lineare per installazione a parete, dal design insolito e minimale. Realizzato in estruso di alluminio e trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Ha la caratteristica di essere direzionale grazie allo snodo posto su di un perno fra corpo e base che ne consente la rotazione.

Equipaggiato mid-power led colorazione 2800/3150K, fissata al corpo con resina bicomponente a garantirne la tenuta IP.

Disponibile per installazione su entrambi i lati (Dx e Sx) in bassa tensione e nella versione IP20 con alimentatore a bordo.

Design by Rocco ESTE

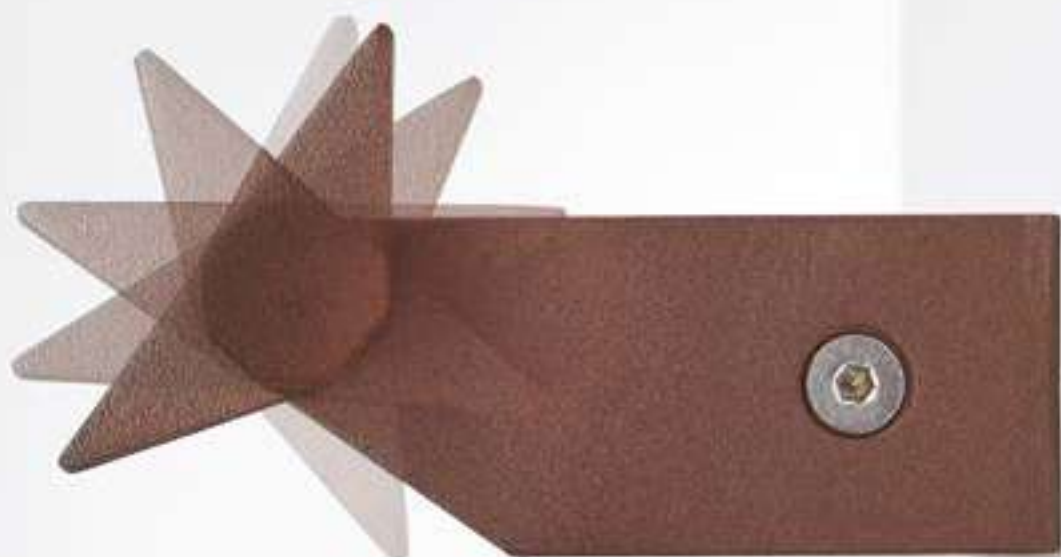



Root Outdoor

dx

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser
Shape

mid power led
24V
PWM
≥80
IP65
III
wall, roof
opal resin
rectangular

Power
Led Colour temp. 24V - 12W
2800K / 3150K



indirect lighting only


		lm	white	sand	graphite	aluminium	corten	green
2800K 12W	24V	783	901631002	901631003	901631004	901631005	901631008	9016310016
		lm	white	sand	graphite	aluminium	corten	green
3150K 12W	24V	824	901611002	901611003	901611004	901611005	901611008	9016110016

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Root Outdoor

SX

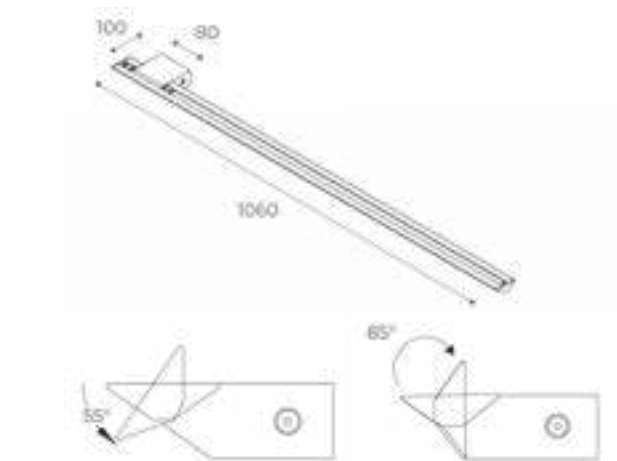

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser
Shape

mid power led
24V
PWM
≥80
IP65
III
wall, roof
opal resin
rectangular

Power 24V - 12W
Led Colour temp. 2800K / 3150K



indirect lighting only


		lm	white	sand	graphite	aluminium	corten	green
2800K 12W	24V	783	901631012	901631013	901631014	901631015	901631018	9016310116
		lm	white	sand	graphite	aluminium	corten	green
3150K 12W	24V	824	901611012	901611013	901611014	901611015	901611018	9016110116

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Root Indoor

dx

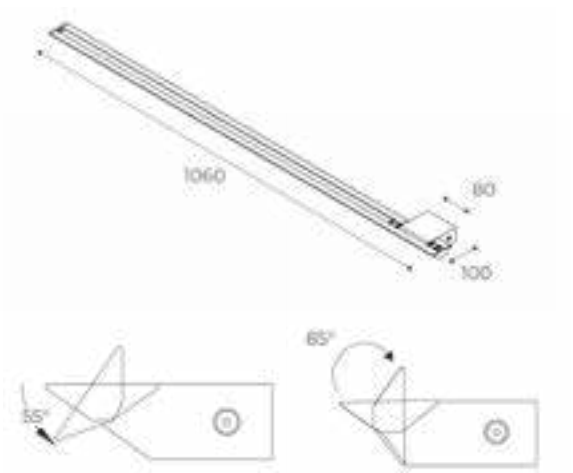

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser
Shape

mid power led
220-240V
≥80
IP20
II
wall, roof
opal resin
rectangular

Power
Led Colour temp. 220-240V - 8,1Wled - 10,2We
2800K / 3150K



indirect lighting only


		lm	white	sand	graphite	aluminium	corten	green
2800K 8,1Wled 10,2We	220-240V	548	901631022	901631023	901631024	901631025	901631028	9016310216
		lm	white	sand	graphite	aluminium	corten	green
3150K 8,1Wled 10,2We	220-240V	577	901611022	901611023	901611024	901611025	901611028	9016110216

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Root Indoor

SX

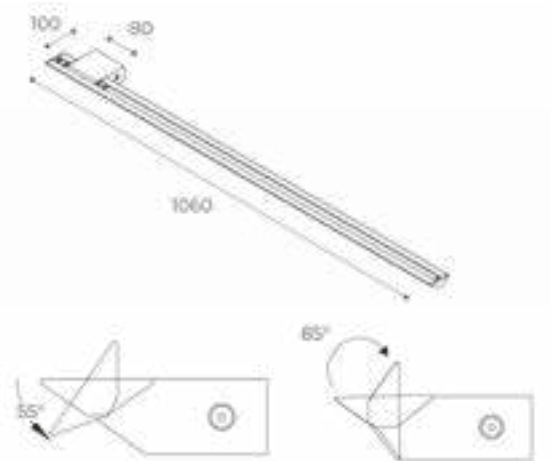

Available finishes:



Light Source
Supply
CRI
IP rating
Electrical Class
Application
Diffuser
Shape

mid power led
220-240V
≥80
IP20
II
wall, roof
opal resin
rectangular

Power 220-240V - 8,1Wled - 10,2We
Led Colour temp. 2800K / 3150K



indirect lighting only


		lm	white	sand	graphite	aluminium	corten	green
2800K 8,1Wled 10,2We	220-240V	548	901631032	901631033	901631034	901631035	901631038	9016310316
		lm	white	sand	graphite	aluminium	corten	green
3150K 8,1Wled 10,2We	220-240V	577	901611032	901611033	901611034	901611035	901611038	9016110316

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.




ACCESSORIES




Power supply 220-240V 16Watt
IP20
118x52x26mm

code **9006**




Power supply 220-240V DC 70W
IP67
267x79x52mm

code **9049**




Power supply 220-240V 20Watt
IP20 103x67x21mm

code **9007**




Power supply 220-240V DC 150W
IP67 267x79x52mm

code **9057**




Power supply 220-240V 50Watt
IP20 190x60x36mm

code **9008**



SPD CL.1 12KV 320V UC max
40x57x20mm

code **9058**



Power supply 16W 220-240V IP65
125x61x31mm

code **9059**

ACCESSORIES:

code **9006 / 9007 / 9008 / 9059 / 9049 / 9057 / 9058**



Aria

THE SIMPLICITY OF TRADITION

Aria is a surface mounted made of die-cast aluminum with cataphoresis treatment and a layer of polyester powder coating, resistant to outdoor environments, suitable for wall or ceiling installation.

It features an ultra-diffusing screen that, combined with the Edge-LED arrangement of the Mid-power LEDs, ensures high luminous efficiency.

Its minimal lines and extremely compact dimensions make it a highly adaptable product, also thanks to its elegant appearance

Aria è una plafoniera realizzata in alluminio pressofuso e trattamento di cataforesi con strato di vernice di polvere di poliestere resistente agli ambienti esterni, adatta all'installazione a parete o soffitto.

È dotata di uno schermo ultra diffondente che unito alla disposizione Edge-led dei Mid-power Led garantisce grande efficienza luminosa.

Le linee minimali e le dimensioni assolutamente compatte la rendono un prodotto certamente di facilissima adattabilità, grazie anche ad un aspetto elegante.

Aria



Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

mid power led
220-240V
phase cut
≥80
65
II
wall/ceiling
polycarbonate

Power
Led Colour temp. 220-240V 12Wled - 16We
2700K/3000K



		lm	white	sand	graphite	aluminium	corten	green
2700K 12Wled 16We	220-240V	1461	900737002	900737003	900737004	900737005	900737008	9007370016
		lm	white	sand	graphite	aluminium	corten	green
3000K 12Wled 16We	220-240V	1538	900717002	900717003	900717004	900717005	900717008	9007170016





Zero

LOOKING FOR A LIGHT THAT GUIDES US

Family of recessed ground lights, made of turned and anodized aluminum in a natural finish, available in four sizes: Ø45mm, Ø65mm, Ø85mm, and Ø110mm.

All models come with a transparent tempered and silk-screened glass, fixed with silicone robotic system and are available with or without a honeycomb grid.

The Ø45mm and Ø65mm versions are equipped with Power-LED boards (2700K and 3000K), while the Ø85mm model is equipped with a Mid-power LED board (3000K).

The Zero Dome model features a body made of stainless steel (AISI 316L) and a frosted polycarbonate diffuser, offering either 360° or 180° radial light emission, fully resin-coated internally to ensure its IP protection.

The Zero Ø110mm model is equipped with a COB LED with a lens, mounted on a rotating mechanical system for adjusting the light beam.

This system is directly accessible to the installer, allowing the beam to be directed during installation.


Famiglia di incassi a pavimento, in alluminio tornito ed anodizzato in finitura naturale e quattro misure disponibili Ø45mm, Ø65mm, Ø85mm; Ø110mm.

Tutti i modelli sono completi di vetro trasparente temprato e serigrafato, fissato con colla siliconica, disponibile nelle versioni con honeycomb o senza.

Le due versioni Ø45mm, Ø65mm sono equipaggiate da schede Power-led (2700K e 3000K), mentre il modello Ø85mm da scheda Mid-power Led (3000K).

Il modello Zero Dome è caratterizzato da corpo in acciaio Inox (AISI 316L) e un diffusore in polycarbonato satinato, emissione radiale a 360° o 180°, totalmente resinato internamente per garantirne la tenuta.

Il modello Zero Ø110mm è equipaggiato da un COB led con lente e fissato su sistema meccanico girevole per l'orientamento del fascio luminoso; il sistema è direttamente accessibile dall'installatore che potrà settare il prodotto direttamente in fase di installazione indirizzando il fascio.

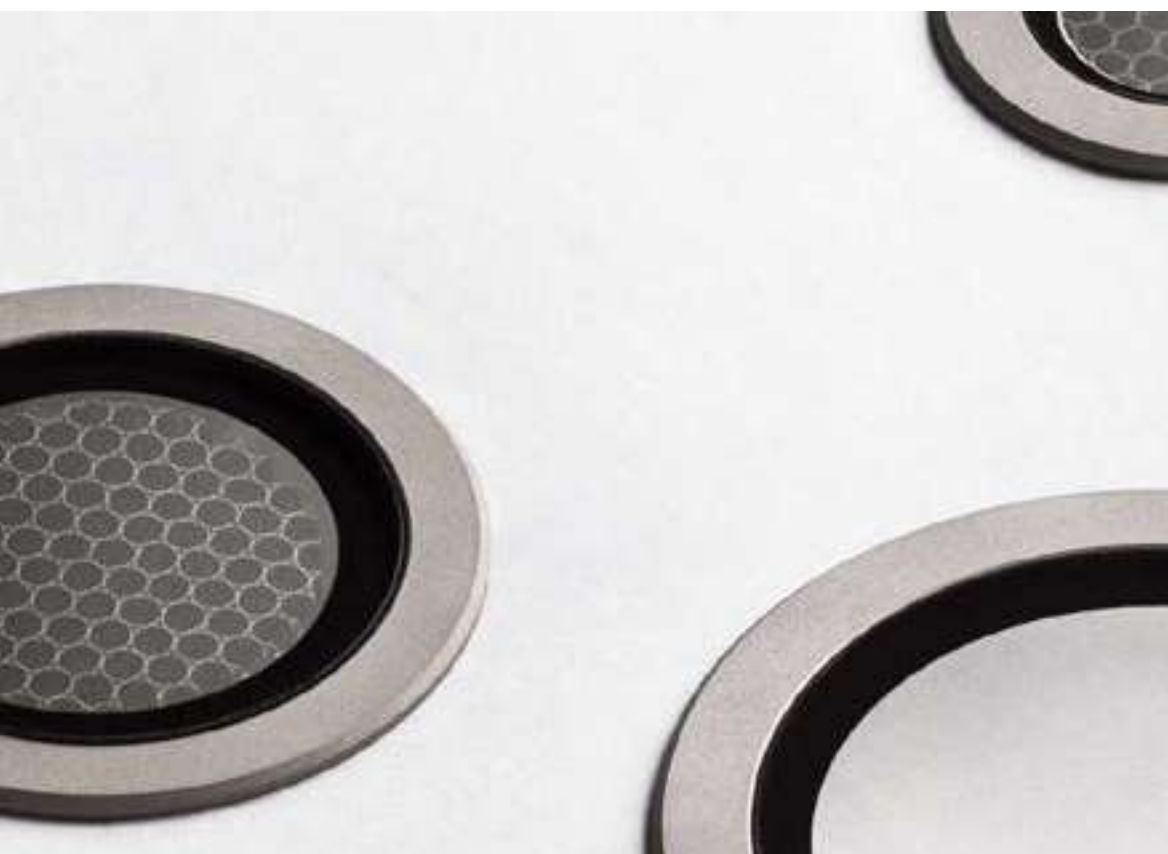

ZERO 110



position 0



position 8°



position 15°



Zero 45



Available finishes:

 aluminium

Light Source	power led
Supply	24V
Dimmer	PWM
CRI	≥80
IP rating	IP67
Electrical Class	III
Application	ground recessed
Diffuser	tempered glass transparent

Power	24V 2Wled - 3We
Led Colour temp.	2700K / 3000K



					lm	aluminium
2700K	24V	18°		with honeycomb	98	900132136
2Wled		18°		without honeycomb	169	900132146
3 We		36°		with honeycomb	75	900132026
		36°		without honeycomb	224	900132036
3000K	24V	18°		with honeycomb	103	900112136
2Wled		18°		without honeycomb	175	900112146
3 We		36°		with honeycomb	79	900112026
		36°		without honeycomb	236	900112036

Zero 65



Available finishes:



aluminium

Light Source	power led
Supply	24V
Dimmer	PWM
CRI	≥80
IP rating	IP67
Electrical Class	III
Application	ground recessed
Diffuser	tempered glass transparent

Power	24V 5,8Wled - 6,3We
Led Colour temp.	2700K / 3000K



				lm	aluminium
2700K	24V	10° ▲	with honeycomb	243	900132196
5,8Wled		10° ▲	without honeycomb	405	900132206
6,3We		26° ▲	with honeycomb	251	900132096
		26° ▲	without honeycomb	432	900132126
		52° ▲	with honeycomb	135	900132066
		52° ▲	without honeycomb	409	900132076

				lm	aluminium
3000K	24V	10° ▲	with honeycomb	253	900112196
5,8Wled		10° ▲	without honeycomb	422	900112206
6,3We		26° ▲	with honeycomb	264	900112096
		26° ▲	without honeycomb	455	900112126
		52° ▲	with honeycomb	142	900112066
		52° ▲	without honeycomb	431	900112076

Zero 85




Available finishes:

 aluminium


Light Source	power led
Supply	24V
Dimmer	PWM
CRI	≥80
IP rating	IP67
Electrical Class	III
Application	ground recessed
Diffuser	tempered sandblasted glass

Power	24V 5,5Wled
Led Colour temp.	3000K



				lm	aluminium
3000K 5,5Wled	24V	diffused		131	900112086
		diffused		451	900112166

Zero 110

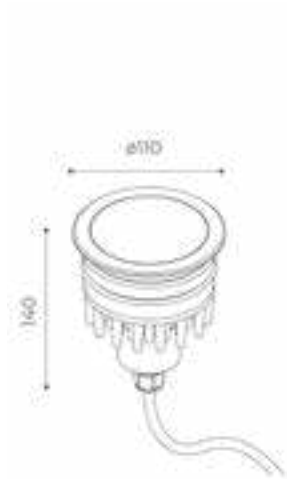


Available finishes:



aluminium

Light Source	cob led
Supply	24V
Dimmer	PWM
CRI	≥80
IP rating	IP67
Electrical Class	III
Application	ground recessed
Diffuser	tempered sandblasted glass

Power	24V 12Wled
Led Colour temp.	2700K / 3000K



				lm	aluminium
2700K 12Wled	24V	15°		1088	900132016
		36°		1081	900132106
		60°		1019	900132116
3000K 12Wled	24V	15°		1146	900112016
		36°		1143	900112106
		60°		1073	900112116

Zero Dome



Available finishes:



inox

Light Source	mid power led
Supply	24V
Dimmer	PWM
CRI	≥80
IP rating	IP67
Electrical Class	III
Application	ground / wall recessed
Diffuser	printed polycarbonate diffuser

Power	24V 1Wled / 2Wled
Led Colour temp.	2700K / 3000K



			lm	inox
2700K	24V	180°	21	900132171
1 We				

			lm	inox
3000K	24V	180°	22	900112171
1 We				

			lm	inox
2700K	24V	360°	50	900132181
2 We				

			lm	inox
3000K	24V	360°	52	900112181
2 We				






ACCESSORIES




Recessed box Zero 45
Ø40x113mm

code **9001**




Power supply 220-240V
118x52x26mm

code **9006**




Recessed box Zero 65
Ø63x113mm

code **9002**




Power supply 220-240V IP20
103x67x21mm

code **9007**




Recessed box Zero 85
Ø80x162mm

code **9003**




Power supply 220-240V
190x60x36mm

code **9008**




Recessed box Zero 110
Ø100x206mm

code **9000**




Power 220-240V IP67
267x79x52mm

code **9049**



3-4 way - 4 poles terminal block IP68
53x26x82mm
(only for Zero 85 and Zero 110)

code **9005**



Power supply 220-240V
125x61x31mm

code **9059**

ACCESSORIES:

code **9001 / 9002 / 9003 / 9000 / 9005 / 9006 / 9007 / 9008 / 9049 / 9059**



Tasca

ILLUMINATING MEANS CALLING SOMETHING BY NAME

Tasca is a lighting element designed for recessed wall applications a timeless fixture in its function, ideal as a step marker in walkways and outdoor spaces where efficient yet discreet lighting is needed.

Its compact dimensions and absence of visible screws make it a renewed and contemporary product.

The structure is die-cast aluminium, treated with electrophoresis and coated with polyester powder, the carter is painted in white colour, or alternatively anodized natural or gold.

The LED board is sealed on the heat sink with opal resin, ensuring protection from moisture as well as extremely simple installation; installation box mandatory.

Tasca è un elemento luminoso per applicazione a parete intramontabile nella sua funzione, ideale come segna passo nei camminamenti e negli spazi esterni nei quali si necessita di un'illuminazione efficiente ma discreta.

Le sue dimensioni compatte e l'assenza di viti a vista lo rendono un prodotto rinnovato e attuale.


La struttura è in alluminio pressofuso, trattato con bagno di cataforesi e verniciato con polvere di poliestere e carter in alluminio verniciato bianco o, opzionale, alluminio anodizzato naturale o oro lucido.

Il vano led è sigillato sul dissipatore con resina opale che ne garantisce la protezione dall'umidità nonché l'estrema semplicità di installazione, da fare obbligatoriamente con cassaforma.





Tasca

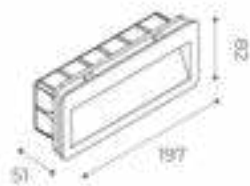

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green

Light Source mid power led
Supply 24V/220-240V
Dimmer 24V PWM - 220-240V upon request
CRI ≥80 24V (PWM)
IP rating IP65
Electrical Class II, III
Application wall
Diffuser opal resin / white reflector

Power 24V 3,6We
220-240V 3,6Wled 5We
Led Colour temp. 2700K / 3000K




		lm	white	sand	graphite	aluminium	corten
2700K 3,6 We	24V	306	902432002	902432003	902432004	902432005	902432008
3000K 3,6 We	24V	315	902412002	902412003	902412004	902412005	902412008
		lm	white	sand	graphite	aluminium	corten
2700K 5 We	220-240V II	306	902431002	902431003	902431004	902431005	902431008
3000K 5 We	220-240V II	315	902411002	902411003	902411004	902411005	902411008

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.


La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

ACCESSORIES




Recessed box Tasca
85x50x190mm

code **9073**




Power supply 16W 110-240V IP65
125x61x31mm

code **9059**




Shield for Tasca
colour **Gold**

code **9074**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**



Shield for Tasca
colour **Aluminium**

code **9075**



SPD CL.1 12KV 320V UC max
40x57x20mm

code **9058**

ACCESSORIES:

code **9073 / 9074 / 9075 / 9059 / 9049 / 9058**



Modulo A

DISCOVER NEW PLACES, REDISCOVER WHICH ONES WE ALREADY KNOW

Wall-mounted lamp, made of die-cast aluminium with cathodoluminescence treatment and a layer of polyester powder paint resistant to outdoor environments.

Available in two shapes: square or rectangular, it can be installed directly on the wall or with a housing box to accommodate the power supply, if needed.

Equipped with Mid-power LED in 2700K and 3000K versions, the diffusing screen, available in aluminium or gold, is discreet and elegant, serving both a functional and aesthetic purpose.

Lampada per installazione a parete, in alluminio pressofuso trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Proposta in due forme: quadrata o rettangolare può essere installata direttamente a parete o con la cassaforma dove alloggiare l'eventuale alimentatore, a bordo Mid-power led in versione 2700K e 3000K, discreto ed elegante lo schermo diffondente in alluminio o oro oltre che funzionale diventa anche elemento estetico.



Modulo A/SQ



Available finishes:



Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application wall

Power 24V 2,4Wled
Led Colour temp. 2700K / 3000K



		lm	white	sand	graphite	aluminium	corten	green
2700K	24V	97	900631002	900631003	900631004	900631005	900631008	9006310016
2,4Wled								
		lm	white	sand	graphite	aluminium	corten	green
3000K	24V	102	900611002	900611003	900611004	900611005	900611008	9006110016
2,4Wled								



Modulo A/RC



Available finishes:



Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application wall


Power 24V 4,6Wled
Led Colour temp. 2700K / 3000K



		lm	white	sand	graphite	aluminium	corten	green
2700K	24V	185	900631012	900631013	900631014	900631015	900631018	9006310116
4,6Wled								
		lm	white	sand	graphite	aluminium	corten	green
3000K	24V	195	900611012	900611013	900611014	900611015	900611018	9006110116
4,6Wled								




ACCESSORIES




Recessed box Modulo A SQ
71x71x53,5mm

code **9018**




Power supply 8V 220-240V IP54
44x46x26mm
(for recessed box 9018 and 9019)

code **9037**




Recessed box Modulo A RC
74x106x53,5mm

code **9019**




Power supply 220-240V 16W
IP20
118x52x26mm

code **9006**




Shield
for Modulo A/SQ
colour **Gold**

code **9038**




Power supply 220-240V 50W
IP20 190x60x36mm

code **9008**



Shield
for Modulo A/RC
colour **Gold**

code **9039**



Power supply 16W 220-240V
IP65
125x61x31mm

code **9059**

ACCESSORIES:

code **9018 / 9019 / 9038 / 9039 / 9037 / 9006 / 9008 / 9059**



DX

HIGHLIGHTING AND ILLUMINATING SPACES

The Dx projector family stands out for its extraordinary versatility, thanks to a range of accessories that make it ideal for various applications. Dx projectors are suitable for installations on solid surfaces, such as floors, ceilings, and walls, as well as for ground installations using stakes.

Made from high-quality aluminum, turned, anodized, and painted with a diffusing glass fixed with silicone adhesive to ensure IP protection, they are equipped with power LEDs.

Their adjustability, combined with low-luminance lighting and refined finishes, guarantees excellent aesthetic and functional performance in any setting.

Both the 38 mm and 54 mm models can be used as projectors, by directly attaching the bracket or available in the versions with a stem.

The DX 38 is the smallest spot projector, powered by 24V low voltage, and is available in 3 different heights (60 mm, 160 mm, 500 mm) for installation on solid surfaces with a base, or in the ground with the spike version. It is also offered with an integrated power supply in the specific version with a base (92x59 mm).

The DX54 is available in the 24V version or with an integrated 220-240V power supply and in 3 heights (70 mm, 170 mm, 510 mm); for installation on solid surfaces with the version with a base or on the ground with the spike version.

La famiglia di proiettori Dx si distingue per la sua straordinaria versatilità, grazie a una gamma di accessori che la rende ideale per diverse applicazioni.

I proiettori Dx sono adatti per installazioni su superfici solide, come pavimenti, soffitti e pareti, oltre che per installazioni a terra grazie all'uso del picchetto.

Realizzato in alluminio di primaria qualità, tornito, anodizzato e verniciato con vetro diffusore fissato con collante silconico a garantirne la tenuta IP, equipaggiato da power led.

La loro orientabilità, combinata con un'illuminazione a bassa luminanza e le raffinate finiture, garantisce un'eccellente resa estetica e funzionale in qualsiasi contesto. Sia il modello 38mm che il 54mm sono utilizzabili come proiettore, fissando direttamente la staffa oppure disponibili nelle versioni su stelo.

DX 38 è lo spot più piccolo, alimentato 24V bassa tensione è disponibile in 3 altezze differenti (h.60mm, h.160mm, h.500mm) per installazione su superfici solide nella versione con basetta o nel terreno per la versione con picchetto.

Proposto anche con alimentatore integrato nella versione specifica con base (92x59mm).

DX54 disponibile in versione 24V o con alimentatore integrato nel corpo 220-240V e in 3 altezze (h.70mm, h.170mm, h.510mm); per installazione su superfici solide nella versione con basetta o nel terreno la versione con picchetto.














Dx Ø38

18° | 36°



Available finishes:



Light Source

Supply

Dimmer

CRI

IP rating

Electrical Class

Application

Diffuser

power led

24V

PWM

≥80

IP65

III

wall, ground, roof

transparent glass

Power

Led Colour temp.

24V 2Wled - 3We

2700K / 3000K



		fascio	lm	aluminium	bronze	black	green
2700K	24V	▲ 18°with honeycomb	98	900432006	900432009	900432007	9004320016
2Wled		▲ 36°with honeycomb	74	900432016	900432019	900432017	9004320116
3We		▲ 18°without honeycomb	103	900432186	900432189	900432187	9004321816
		▲ 36°without honeycomb	222	900432196	900432199	900432197	9004321916

		fascio	lm	aluminium	bronze	black	green
3000K	24V	▲ 18°with honeycomb	103	900412006	900412009	900412007	9004120016
2Wled		▲ 36°with honeycomb	78	900412016	900412019	900412017	9004120116
3We		▲ 18°without honeycomb	178	900412186	900412189	900412187	9004121816
		▲ 36°without honeycomb	234	900412196	900412199	900412197	9004121916

Dx Ø38 Stem Spike h.60

18° | 36°



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V
PWM
≥80
IP65
III
ground
transparent glass

Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black	green
2700K	24V	▲ 18°with honeycomb	98	900432056	900432059	900432057	9004320516
2Wled		▲ 36°with honeycomb	74	900432086	900432089	900432087	9004320816
3We		▲ 18°without honeycomb	103	900432246	900432249	900432247	9004322416
		▲ 36°without honeycomb	222	900432276	900432279	900432277	9004322716

		fascio	lm	aluminium	bronze	black	green
3000K	24V	▲ 18°with honeycomb	103	900412056	900412059	900412057	9004120516
2Wled		▲ 36°with honeycomb	78	900412086	900412089	900412087	9004120816
3We		▲ 18°without honeycomb	178	900412246	900412249	900412247	9004122416
		▲ 36°without honeycomb	234	900412276	900412279	900412277	9004122716

Dx Ø38 Stem Spike h.160

18° | 36°



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V
PWM
≥80
IP65
III
ground
transparent glass

Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black	green
2700K	24V	▲ 18°with honeycomb	98	900432066	900432069	900432067	9004320616
2Wled		▲ 36°with honeycomb	74	900432096	900432099	900432097	9004320916
3We		▲ 18°without honeycomb	103	900432256	900432259	900432257	9004322516
		▲ 36°without honeycomb	222	900432286	900432289	900432287	9004322816

		fascio	lm	aluminium	bronze	black	green
3000K	24V	▲ 18°with honeycomb	103	900412066	900412069	900412067	9004120616
2Wled		▲ 36°with honeycomb	78	900412096	900412099	900412097	9004120916
3We		▲ 18°without honeycomb	178	900412256	900412259	900412257	9004122516
		▲ 36°without honeycomb	234	900412286	900412289	900412287	9004122816

Dx Ø38 Stem Spike h.500

18° | 36°



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V
PWM
≥80
IP65
III
ground
transparent glass

Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black	green
2700K	24V	▲ 18°with honeycomb	98	900432076	900432079	900432077	9004320716
2Wled		▲ 36°with honeycomb	74	900432106	900432109	900432107	9004321016
3We		▲ 18°without honeycomb	103	900432266	900432269	900432267	9004322616
		▲ 36°	222	900432296	900432299	900432297	9004322916

		fascio	lm	aluminium	bronze	black	green
3000K	24V	▲ 18°with honeycomb	103	900412076	900412079	900412077	9004120716
2Wled		▲ 36°with honeycomb	78	900412106	900412109	900412107	9004121016
3We		▲ 18°without honeycomb	178	900412266	900412269	900412267	9004122616
		▲ 36°without honeycomb	234	900412296	900412299	900412297	9004122916

Dx Ø38 Stem Base h.60

18° | 36°



Available finishes:

- aluminium
- bronze
- black
- olive green

Light Source
power led
Supply
220-240V
Dimmer
not
CRI
≥80
IP rating
IP65
Electrical Class
II
Application
ground
Diffuser
transparent glass

Power
220-240V 2Wled - 3,5We
Led Colour temp.
2700K / 3000K



			fascio	lm	aluminium	bronze	black	green
2700K 2Wled 3,5We	220-240V	▲	18°with honeycomb	98	900431436	900431439	900431437	9004314316
		▲	36°with honeycomb	74	900431496	900431499	900431497	9004314916
		▲	18°without honeycomb	103	900431466	900431469	900431467	9004314616
		▲	36°without honeycomb	222	900431526	900431529	900431527	9004315216
			fascio	lm	aluminium	bronze	black	green
3000K 2Wled 3,5We	220-240V	▲	18°with honeycomb	103	900411436	900411439	900411437	9004114316
		▲	36°with honeycomb	78	900411496	900411499	900411497	9004114916
		▲	18°without honeycomb	178	900411466	900411469	900411467	9004114616
		▲	36°without honeycomb	234	900411526	900411529	900411527	9004115216

Dx Ø38 Stem Base h.160

18° | 36°



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
220-240V
not
≥80
IP65
II
ground
transparent glass

Power 220-240V 2Wled - 3,5We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black	green
2700K	220-240V	▲ 18°with honeycomb	98	900431446	900431449	900431447	900431446
2Wled		▲ 36°with honeycomb	74	900431506	900431509	900431507	900431506
3,5We		▲ 18°without honeycomb	103	900431476	900431479	900431477	900431476
		▲ 36°without honeycomb	222	900431536	900431539	900431537	900431536

		fascio	lm	aluminium	bronze	black	green
3000K	220-240V	▲ 18°with honeycomb	103	900411446	900411449	900411447	900411446
2Wled		▲ 36°with honeycomb	78	900411506	900411509	900411507	900411506
3,5We		▲ 18°without honeycomb	178	900411476	900411479	900411477	900411476
		▲ 36°without honeycomb	234	900411536	900411539	900411537	900411536

Dx Ø38 Stem Base h.500

18° | 36°

Available finishes:

- aluminium
- bronze
- black
- olive green

Light Source
power led
Supply
220-240V
Dimmer
not
CRI
≥80
IP rating
IP65
Electrical Class
II
Application
ground
Diffuser
transparent glass

Power
220-240V 2Wled - 3,5We
Led Colour temp.
2700K / 3000K




		fascio	lm	aluminium	bronze	black	green
2700K	220-240V	▲ 18°with honeycomb	98	900431456	900431459	900431457	9004314516
2Wled		▲ 36°with honeycomb	74	900431516	900431519	900431517	9004315116
3,5We		▲ 18°without honeycomb	103	900431486	900431489	900431487	9004314816
		▲ 36°without honeycomb	222	900431546	900431549	900431547	9004315416

		fascio	lm	aluminium	bronze	black	green
3000K	220-240V	▲ 18°with honeycomb	103	900411456	900411459	900411457	9004114516
2Wled		▲ 36°with honeycomb	78	900411516	900411519	900411517	9004115116
3,5We		▲ 18°without honeycomb	178	900411486	900411489	900411487	9004114816
		▲ 36°without honeycomb	234	900411546	900411549	900411547	9004115416




ACCESSORIES




Power 220-240V IP54
44x46x26mm

code **9037**




Power 220-240V IP67
267x79x52mm

code **9049**




Power supply 220-240V 16Watt
IP20
118x52x26mm

code **9006**




Power supply 220-240V
267x79x52mm

code **9057**




Power supply 220-240V 20W IP20
103x67x21mm

code **9007**




SPD CL.1 12KV 320V UC max
40x57x20mm

code **9058**




Power supply 220-240V 50W IP20
190x60x36mm

code **9008**




Tube Frame
Ø38x25mm
colour **Black**

code **90117**



Power 220-240V IP65
125x61x31mm

code **9059**



Eyelid Frame
Ø38x39mm
colour **Black**


code **90127**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9059 / 9049 / 9057 / 9058 / 90117 / 90127**

Dx Ø54

10° | 26° | 52°



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V / 220-240V
only 24V (PWM)
≥80
IP65
II, III
wall, ground, roof
transparent glass

Power 24V 5,8Wled -6,3We
220-240V 5,8Wled - 6,9We
Led Colour temp. 2700K / 3000K



			fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,3We	24V III	▲	10°with honeycomb	243	900432436	900432439	900432437	9004324316
		▲	26°with honeycomb	251	900432036	900432039	900432037	9004320316
		▲	52°with honeycomb	135	900432046	900432049	900432047	9004320416
		▲	10°without honeycomb	405	900432446	900432449	900432447	9004324416
		▲	26°without honeycomb	432	900432206	900432209	900432207	9004322016
		▲	52°without honeycomb	409	900432216	900432219	900432217	9004322116
			fascio	lm	aluminium	bronze	black	green
3000K 5,8Wled 6,3We	24V III	▲	10°with honeycomb	253	900412436	900412439	900412437	9004124316
		▲	26°with honeycomb	264	900412036	900412039	900412037	9004120316
		▲	52°with honeycomb	142	900412046	900412049	900412047	9004120416
		▲	10°without honeycomb	422	900412446	900412449	900412447	9004124416
		▲	26°without honeycomb	455	900412206	900412209	900412207	9004122016
		▲	52°without honeycomb	431	900412216	900412219	900412217	9004122116
			fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,9We	220-240V	▲	10°with honeycomb	243	900431556	900431559	900431557	9004315516
		▲	26°with honeycomb	251	900431006	900431009	900431007	9004310016
		▲	52°with honeycomb	135	900431016	900431019	900431017	9004310116
		▲	10°without honeycomb	405	900431566	900431569	900431567	9004315616
		▲	26°without honeycomb	432	900431226	900431229	900431227	9004312216
		▲	52°without honeycomb	409	900431236	900431239	900431237	9004312316
			fascio	lm	aluminium	bronze	black	green
3000K 5,8Wled 6,9We	220-240V	▲	10°with honeycomb	253	900411556	900411559	900411557	9004115516
		▲	26°with honeycomb	264	900411006	900411009	900411007	9004110016
		▲	52°with honeycomb	142	900411016	900411019	900411017	9004110116
		▲	10°without honeycomb	422	900411566	900411569	900411567	9004115616
		▲	26°without honeycomb	455	900411226	900411229	900411227	9004112216
		▲	52°without honeycomb	431	900411236	900411239	900411237	9004112316

Dx Ø54 Stem Spike h.70

10° | 26° | 52°



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V / 220-240V
only 24V (PWM)
≥80
IP65
II, III
ground
transparent glass

Power 24V 5,8Wled -6,3We
220-240V 5,8Wled - 6,9We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	243	900432576	900432579	900432577	9004325716
		▲ 26°with honeycomb	251	900432116	900432119	900432117	9004321116
		▲ 52°with honeycomb	135	900432146	900432149	900432147	9004321416
		▲ 10°without honeycomb	405	900432586	900432589	900432587	9004325816
		▲ 26°without honeycomb	432	900432306	900432309	900432307	9004323016
		▲ 52°without honeycomb	409	900432336	900432339	900432337	9004323316

		fascio	lm	aluminium	bronze	black	green
3000K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	253	900412576	900412579	900412577	9004125716
		▲ 26°with honeycomb	264	900412116	900412119	900412117	9004121116
		▲ 52°with honeycomb	142	900412146	900412149	900412147	9004121416
		▲ 10°without honeycomb	422	900412586	900412589	900412587	9004125816
		▲ 26°without honeycomb	455	900412306	900412309	900412307	9004123016
		▲ 52°without honeycomb	431	900412336	900412339	900412337	9004123316

		fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	243	900431576	900431579	900431577	9004315716
		▲ 26°with honeycomb	251	900431026	900431029	900431027	9004310216
		▲ 52°with honeycomb	135	900431056	900431059	900431057	9004310516
		▲ 10°without honeycomb	405	900431586	900431589	900431587	9004315816
		▲ 26°without honeycomb	432	900431366	900431369	900431367	9004313616
		▲ 52°without honeycomb	409	900431396	900431399	900431397	9004313916

		fascio	lm	aluminium	bronze	black	green
3000K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	253	900411576	900411579	900411577	9004115716
		▲ 26°with honeycomb	264	900411026	900411029	900411027	9004110216
		▲ 52°with honeycomb	142	900411056	900411059	900411057	9004110516
		▲ 10°without honeycomb	422	900411586	900411589	900411587	9004115816
		▲ 26°without honeycomb	455	900411366	900411369	900411367	9004113616
		▲ 52°without honeycomb	431	900411396	900411399	900411397	9004113916

Dx Ø54 Stem Spike h.170

10° | 26° | 52°



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V / 220-240V
only 24V (PWM)
≥80
IP65
II, III
ground
transparent glass

Power 24V 5,8Wled -6,3We
220-240V 5,8Wled - 6,9We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	243	900432596	900432599	900432597	9004325916
		▲ 26°with honeycomb	251	900432126	900432129	900432127	9004321216
		▲ 52°with honeycomb	135	900432156	900432159	900432157	9004321516
		▲ 10°without honeycomb	405	900432606	900432609	900432607	9004326016
		▲ 26°without honeycomb	432	900432316	900432319	900432317	9004323116
		▲ 52°without honeycomb	409	900432346	900432349	900432347	9004323416
		fascio	lm	aluminium	bronze	black	green
3000K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	253	900412596	900412599	900412597	9004125916
		▲ 26°with honeycomb	264	900412126	900412129	900412127	9004121216
		▲ 52°with honeycomb	142	900412156	900412159	900412157	9004121516
		▲ 10°without honeycomb	422	900412606	900412609	900412607	9004126016
		▲ 26°without honeycomb	455	900412316	900412319	900412317	9004123116
		▲ 52°without honeycomb	431	900412346	900412349	900412347	9004123416
		fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	243	900431596	900431599	900431597	9004315916
		▲ 26°with honeycomb	251	900431036	900431039	900431037	9004310316
		▲ 52°with honeycomb	135	900431066	900431069	900431067	9004310616
		▲ 10°without honeycomb	405	900431606	900431609	900431607	9004316016
		▲ 26°without honeycomb	432	900431376	900431379	900431377	9004313716
		▲ 52°without honeycomb	409	900431406	900431409	900431407	9004314016
		fascio	lm	aluminium	bronze	black	green
3000K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	253	900411596	900411599	900411597	9004115916
		▲ 26°with honeycomb	264	900411036	900411039	900411037	9004110316
		▲ 52°with honeycomb	142	900411066	900411069	900411067	9004110616
		▲ 10°without honeycomb	422	900411606	900411609	900411607	9004116016
		▲ 26°without honeycomb	455	900411376	900411379	900411377	9004113716
		▲ 52°without honeycomb	431	900411406	900411409	900411407	9004114016

Dx Ø54 Stem Spike h.510

10° | 26° | 52°



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V / 220-240V
only 24V (PWM)
≥80
IP65
II, III
ground
transparent glass


Power 24V 5,8Wled -6,3We
220-240V 5,8Wled - 6,9We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	243	900432616	900432619	900432617	9004326116
		▲ 26°with honeycomb	251	900432136	900432139	900432137	9004321316
		▲ 52°with honeycomb	135	900432166	900432169	900432167	9004321616
		▲ 10°without honeycomb	405	900432626	900432629	900432627	9004326216
		▲ 26°without honeycomb	432	900432326	900432329	900432327	9004323216
		▲ 52°without honeycomb	409	900432356	900432359	900432357	9004323516
		fascio	lm	aluminium	bronze	black	green
3000K 5,8Wled 6,3We	24V III	▲ 10°with honeycomb	253	900412616	900412619	900412617	9004126116
		▲ 26°with honeycomb	264	900412136	900412139	900412137	9004121316
		▲ 52°with honeycomb	142	900412166	900412169	900412167	9004121616
		▲ 10°without honeycomb	422	900412626	900412629	900412627	9004126216
		▲ 26°without honeycomb	455	900412326	900412329	900412327	9004123216
		▲ 52°without honeycomb	431	900412356	900412359	900412357	9004123516
		fascio	lm	aluminium	bronze	black	green
2700K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	243	900431616	900431619	900431617	9004316116
		▲ 26°with honeycomb	251	900431046	900431049	900431047	9004310416
		▲ 52°with honeycomb	135	900431076	900431079	900431077	9004310716
		▲ 10°without honeycomb	405	900431626	900431629	900431627	9004316216
		▲ 26°without honeycomb	432	900431386	900431389	900431387	9004313816
		▲ 52°without honeycomb	409	900431426	900431429	900431427	9004314216
		fascio	lm	aluminium	bronze	black	green
3000K 5,8Wled 6,9We	220-240V	▲ 10°with honeycomb	253	900411616	900411619	900411617	9004116116
		▲ 26°with honeycomb	264	900411046	900411049	900411047	9004110416
		▲ 52°with honeycomb	142	900411076	900411079	900411077	9004110716
		▲ 10°without honeycomb	422	900411626	900411629	900411627	9004116216
		▲ 26°without honeycomb	455	900411386	900411389	900411387	9004113816
		▲ 52°without honeycomb	431	900411426	900411429	900411427	9004114216




ACCESSORIES




Power 220-240V IP54
44x46x26mm

code **9037**




Power 220-240V 70W IP67
267x79x52mm

code **9049**




Power supply 220-240V 16W IP20
118x52x26mm

code **9006**




Power 220-240V 150W IP67
267x79x52mm

code **9057**




Power supply 220-240V 20W IP20
103x67x21mm

code **9007**




Tube Frame
Ø54x35mm
colour **Black**

code **90157**




Power supply 220-240V 50W IP20
190x60x36mm

code **9008**




Eyelid Frame
Ø54x50mm
colour **Black**

code **90167**




Power supply 220-240V IP65
125x61x31mm

code **9059**




2 way - 3 poles terminal block IP68
Ø23x66mm

code **9004**



SPD CL.1 12KV 320V UC max
40x57x20mm

code **9058**



3-4 way - 4 poles terminal block IP68
53x26x82mm

code **9005**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9059 / 9049 / 9057 / 9058 / 90157 / 90167 / 9004 / 9005**



Muse

**A NEW RHYTHM OVER ALL THINGS,
SETTING THE WORLD TO SPIN IN A GRACEFUL DANCE**

A new concept of outdoor lamp, a modular system that offers the possibility of modeling and changing even over time, based on the needs of the user.

Composed by 3 main emitting sources in anodized painted aluminium. CAPSULE an elegant light source with modern design, STILLA for settings that require a decorative and minimal touch or SPOT engineered for technical application.

The combination of these three light sources with the various installation accessories offers multiple lighting solutions.


Una nuova concezione di lampada per esterni, un sistema modulare che offre la possibilità di modellarsi e cambiare anche nel tempo sulla base delle esigenze del fruitore.

Composta da 3 fonti emissive principali: CAPSULE, in alluminio anodizzato si propone come una fonte luminosa elegante e dal design moderno per poi evolversi in STILLA, più decorativa e d'atmosfera e per finire SPOT, un proiettore per installazioni più tecniche.

La combinazione di queste tre fonti luminose con i vari accessori per l'installazione offre molteplici soluzioni illuminotecniche.



Muse Stilla Wall



Available finishes:

-  black
-  olive green **on request*

Light Source	mid power led
Supply	24V
Dimmer	PWM
CRI	≥90
Electrical Class	III
IP rating	65
Application	wall
Diffuser	sandblasted glass

Power	24V 1,5Wled
Led Colour temp.	2700/3000K




		lm	black
2700K 1,5Wled	24V	245	902032637
			black
3000K 1,5Wled	24V	255	902012637



Muse Stilla Decò Copper



Available finishes:



Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥90
Electrical Class III
IP rating 65
Application floor, ground
Diffuser sandblasted glass

Power 24V 1,5Wled
Led Colour temp. 2700/3000K



			lm	black	bronze
2700K 1,5Wled	24V	with base	245	902032657	902032659
		with spike	245	902031657	902031659
			lm	black	bronze
3000K 1,5Wled	24V	with base	255	902012657	902012659
		with spike	255	902011657	902011659



Muse Stilla Decò Bend-Shape

h500 / h800

Available finishes:



black

olive green

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

mid power led

24V / 220-240V

only 24V (PWM)

≥90

II, III

65

floor, ground

sandblasted glass


Power

24V 1,5Wled

220-240V 1,5Wled 1,4We

Led Colour temp.

2700/3000K

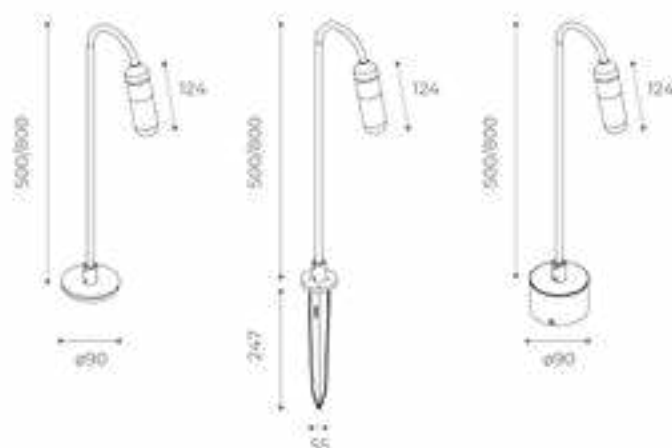

h500

				lm	black	green
2700K	24V	III	with base	245	902032667	9020326616
1,5Wled			with spike	245	902032677	9020326716
1,5We	220-240V	II	with base	245	902031667	9020316616
1,5Wled						
2,4We						
				lm	black	green
3000K	24V	III	with base	255	902012667	9020126616
1,5Wled			with spike	255	902012677	9020126716
1,5We	220-240V	II	with base	255	902011667	9020116616
1,5Wled						
2,4We						

h800


				lm	black	green
2700K	24V	III	with base	245	902032687	9020326816
1,5Wled			with spike	245	902032697	9020326916
1,5We	220-240V	II	with base	245	902031687	9020316816
1,5Wled						
2,4We						
				lm	black	green
3000K	24V	III	with base	255	902012687	9020126816
1,5Wled			with spike	255	902012697	9020126916
1,5We	220-240V	II	with base	255	902011687	9020116816
1,5Wled						
2,4We						



Muse Stilla Decò Stem


h500 / h800

Available finishes:



Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥90
Electrical Class II, III
IP rating 65
Application floor, ground, roof
Diffuser sandblasted glass

Power 24V 1,5Wled
 220-240V 1,5Wled 1,4We
Led Colour temp. 2700/3000K

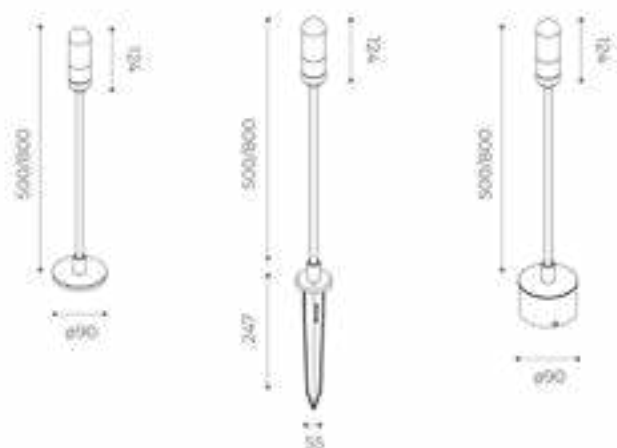

h500

				lm	black	green
2700K	24V	III	with base	245	902032707	9020327016
1,5Wled			with spike	245	902032717	9020327116
1,5We	220-240V	II	with base	245	902031707	9020317016
1,5Wled						
2,4We						
3000K	24V	III	with base	255	902012707	9020127016
1,5Wled			with spike	255	902012717	9020127116
1,5We	220-240V	II	with base	255	902011707	9020117016
1,5Wled						
2,4We						

h800

2700K	24V	III	with base	245	902032727	9020327216
1,5Wled			with spike	245	902032737	9020327316
1,5We	220-240V	II	with base	245	902031727	9020317216
1,5Wled						
2,4We						
3000K	24V	III	with base	255	902012727	9020127216
1,5Wled			with spike	255	902012737	9020127316
1,5We	220-240V	II	with base	255	902011727	9020117216
1,5Wled						
2,4We						










Muse Capsule Wall

mono/double emission



Available finishes:

- black
- aluminium
- bronze
- olive green **on request*

SUPPORT ONLY:

- black

- Light Source** mid power led
- Supply** 24V
- Dimmer** PWM
- CRI** ≥80
- Electrical Class** III
- IP rating** 65
- Application** wall
- Diffuser** polyurethane opal resin

- Power** 24V 4Wled / 2x4Wled
- Led Colour temp.** 2700/2800K - 3000/3100K




			lm	black	aluminium	bronze
2700/2800K 24V 4Wled-4We 2x4Wled-2x4We		mono emission	570	902032747	902032746	902032749
		double emission	2x570	902032757	902032756	902032759
			lm	black	aluminium	bronze
3000/3100K 24V 4Wled-4We 2x4Wled-2x4We		mono emission	600	902012747	902012746	902012749
		double emission	2x600	902012757	902012756	902012759

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.

La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Muse Capsule Bollard

h300 / h500 / h800

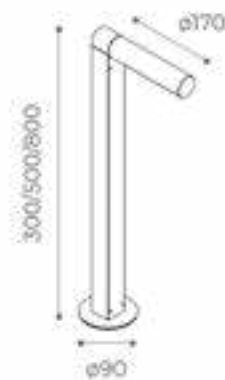

Available finishes:

	black
	aluminium
	bronze
	olive green <i>*on request</i>

SUPPORT ONLY:

	black
--	-------

Light Source	mid power led
Supply	24V / 220-240V
Dimmer	PWM
CRI	≥80
Electrical Class	II, III
IP rating	65
Application	ground
Diffuser	polyurethane opal resin

Power	24V 4Wled 220-240 4Wled 5We
Led Colour temp.	2700/2800K - 3000/3100K



h300

			lm	black	aluminium	bronze
2700/2800K						
4Wled-4We	24V	III	570	902032767	902032766	902032769
4Wled 5,2We	220-240V	II	570	902031767	902031766	902031769

			lm	black	aluminium	bronze
3000/3100K						
4Wled-4We	24V	III	600	902012767	902012766	902012769
4Wled 5,2We	220-240V	II	600	902011767	902011766	902011769

h500

			lm	black	aluminium	bronze
2700/2800K						
4Wled-4We	24V	III	570	902032777	902032776	902032779
4Wled 5,2We	220-240V	II	570	902031777	902031776	902031779

			lm	black	aluminium	bronze
3000/3100K						
4Wled-4We	24V	III	600	902012777	902012776	902012779
4Wled 5,2We	220-240V	II	600	902011777	902011776	902011779

h800


			lm	black	aluminium	bronze
2700/2800K						
4Wled-4We	24V	III	570	902032787	902032786	902032789
4Wled 5,2We	220-240V	II	570	902031787	902031786	902031789

			lm	black	aluminium	bronze
3000/3100K						
4Wled-4We	24V	III	600	902012787	902012786	902012789
4Wled 5,2We	220-240V	II	600	902011787	902011786	902011789



Muse Spot 01

small box




Available finishes:

	white
	sand
	aluminium
	black
	olive green <i>*on request</i>

Light Source	cob led
Supply	220-240V
CRI	≥80
Electrical Class	II
IP rating	65
Application	wall, ground, roof
Diffuser	transparent tempered glass

Power	12Wled/15We
Led Colour temp.	2700/3000K




			lm		white	sand	aluminium	black
2700K	220-240V	▲ 15°		with honeycomb	902031792	902031793	902031795	9020317911
12Wled		▲ 15°	1237	without honeycomb	902031802	902031803	902031805	9020318011
15We		▲ 26°		with honeycomb	902031812	902031813	902031815	9020318111
		▲ 26°	1182	without honeycomb	902031822	902031823	902031825	9020318211
		▲ 36°		with honeycomb	902031832	902031833	902031835	9020318311
		▲ 36°	1182	without honeycomb	902031842	902031843	902031845	9020318411
		▲ 60°	1098	without honeycomb	902031852	902031853	902031855	9020318511

			lm		white	sand	aluminium	black
3000K	220-240V	▲ 15°		with honeycomb	902011792	902011793	902011795	9020137911
12Wled		▲ 15°	1288	without honeycomb	902011802	902011803	902011805	9020118011
15We		▲ 26°		with honeycomb	902011812	902011813	902011815	9020118111
		▲ 26°	1230	without honeycomb	902011822	902011823	902011825	9020118211
		▲ 36°		with honeycomb	902011832	902011833	902011835	9020118311
		▲ 36°	1230	without honeycomb	902011842	902011843	902011845	9020118411
		▲ 60°	1144	without honeycomb	902011852	902011853	902011855	9020118511



Muse Spot 01

big box




Available finishes:



Light Source	cob led
Supply	220-240V
Dimmer	yes
CRI	≥80
Electrical Class	II
IP rating	65
Application	wall, ground, roof
Diffuser	transparent tempered glass

Power	12Wled/15We
Led Colour temp.	2700/3000K




			lm		white	sand	aluminium	black
2700K	220-240V	▲ 15°		with honeycomb	902036792	902036793	902036795	9020367911
12Wled		▲ 15°	1237	without honeycomb	902036802	902036803	902036805	9020368011
15We		▲ 26°		with honeycomb	902036812	902036813	902036815	9020368111
Dali		▲ 26°	1182	without honeycomb	902036822	902036823	902036825	902036811
		▲ 36°		with honeycomb	902036832	902036833	902036835	9020368311
		▲ 36°	1182	without honeycomb	902036842	902036843	902036845	9020368411
		▲ 60°	1098	without honeycomb	902036852	902036853	902036855	9020368511

			lm		white	sand	aluminium	black
3000K	220-240V	▲ 15°		with honeycomb	902016792	902016793	902016795	9020167911
12Wled		▲ 15°	1288	without honeycomb	902016802	902016803	902016805	9020168011
15We		▲ 26°		with honeycomb	902016812	902016813	902016815	9020168111
Dali		▲ 26°	1230	without honeycomb	902016822	902016823	902016825	902016811
		▲ 36°		with honeycomb	902016832	902016833	902016835	9020168311
		▲ 36°	1230	without honeycomb	902016842	902016843	902016845	9020168411
		▲ 60°	1144	without honeycomb	902016852	902016853	902016855	9020168511



Muse Spot 01 Bollard

h300



Available finishes:


- white
- sand
- aluminium
- black
- olive green **on request*

SUPPORT ONLY:

- black

Light Source cob led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 12Wled/15We
Led Colour temp. 2700/3000K



			lm		white	sand	aluminium	black
2700K	220-240V	▲ 15°		with honeycomb	902031862	902031863	902031865	9020318611
12Wled		▲ 15°	1237	without honeycomb	902031872	902031873	902031875	9020318711
15We		▲ 26°		with honeycomb	902031882	902031883	902031885	9020318811
		▲ 26°	1182	without honeycomb	902031892	902031893	902031895	9020318911
		▲ 36°		with honeycomb	902031902	902031903	902031905	9020319011
		▲ 36°	1182	without honeycomb	902031912	902031913	902031915	9020319111
		▲ 60°	1098	without honeycomb	902031922	902031923	902031925	9020319211

			lm		white	sand	aluminium	black
3000K	220-240V	▲ 15°		with honeycomb	902011862	902011863	902011865	9020118611
12Wled		▲ 15°	1288	without honeycomb	902011872	902011873	902011875	9020118711
15We		▲ 26°		with honeycomb	902011882	902011883	902011885	9020118811
		▲ 26°	1230	without honeycomb	902011892	902011893	902011895	9020118911
		▲ 36°		with honeycomb	902011902	902011903	902011905	9020119011
		▲ 36°	1230	without honeycomb	902011912	902011913	902011915	9020119111
		▲ 60°	1144	without honeycomb	902011922	902011923	902011925	9020119211

Muse Spot 01 Bollard

h500



Available finishes:




SUPPORT ONLY:



Light Source cob led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 12Wled/15We
Led Colour temp. 2700/3000K



			lm		white	sand	aluminium	black
2700K	220-240V	▲ 15°		with honeycomb	902031932	902031933	902031935	9020319311
12Wled		▲ 15°	1237	without honeycomb	902031942	902031943	902031945	9020319411
15We		▲ 26°		with honeycomb	902031952	902031953	902031955	9020319511
		▲ 26°	1182	without honeycomb	902031962	902031963	902031965	9020319611
		▲ 36°		with honeycomb	902031972	902031973	902031975	9020319711
		▲ 36°	1182	without honeycomb	902031982	902031983	902031985	9020319811
		▲ 60°	1098	without honeycomb	902031992	902031993	902031995	9020319911


			lm		white	sand	aluminium	black
3000K	220-240V	▲ 15°		with honeycomb	902011932	902011933	902011935	9020119311
12Wled		▲ 15°	1288	without honeycomb	902011942	902011943	902011945	9020119411
15We		▲ 26°		with honeycomb	902011952	902011953	902011955	9020119511
		▲ 26°	1230	without honeycomb	902011962	902011963	902011965	9020119611
		▲ 36°		with honeycomb	902011972	902011973	902011975	9020119711
		▲ 36°	1230	without honeycomb	902011982	902011983	902011985	9020119811
		▲ 60°	1144	without honeycomb	902011992	902011993	902011995	9020119911

Muse Spot 01 Bollard

h800



Available finishes:




SUPPORT ONLY:




Light Source cob led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 12Wled/15We
Led Colour temp. 2700/3000K



			lm		white	sand	aluminium	black
2700K 12Wled 15We	220-240V	▲ 15°		with honeycomb	9020311002	9020311003	9020311005	90203110011
		▲ 15°	1237	without honeycomb	9020311012	9020311013	9020311015	90203110111
		▲ 26°		with honeycomb	9020311022	9020311023	9020311025	90203110211
		▲ 26°	1182	without honeycomb	9020311032	9020311033	9020311035	90203110311
		▲ 36°		with honeycomb	9020311042	9020311043	9020311045	90203110411
		▲ 36°	1182	without honeycomb	9020311052	9020311053	9020311055	90203110511
		▲ 60°	1098	without honeycomb	9020311062	9020311063	9020311065	90203110611

			lm		white	sand	aluminium	black
3000K 12Wled 15We	220-240V	▲ 15°		with honeycomb	9020111002	9020111003	9020111005	90201110011
		▲ 15°	1288	without honeycomb	9020111012	9020111013	9020111015	90201110111
		▲ 26°		with honeycomb	9020111022	9020111023	9020111025	90201110211
		▲ 26°	1230	without honeycomb	9020111032	9020111033	9020111035	90201110311
		▲ 36°		with honeycomb	9020111042	9020111043	9020111045	90201110411
		▲ 36°	1230	without honeycomb	9020111052	9020111053	9020111055	90201110511
		▲ 60°	1144	without honeycomb	9020111062	9020111063	9020111065	90201110611

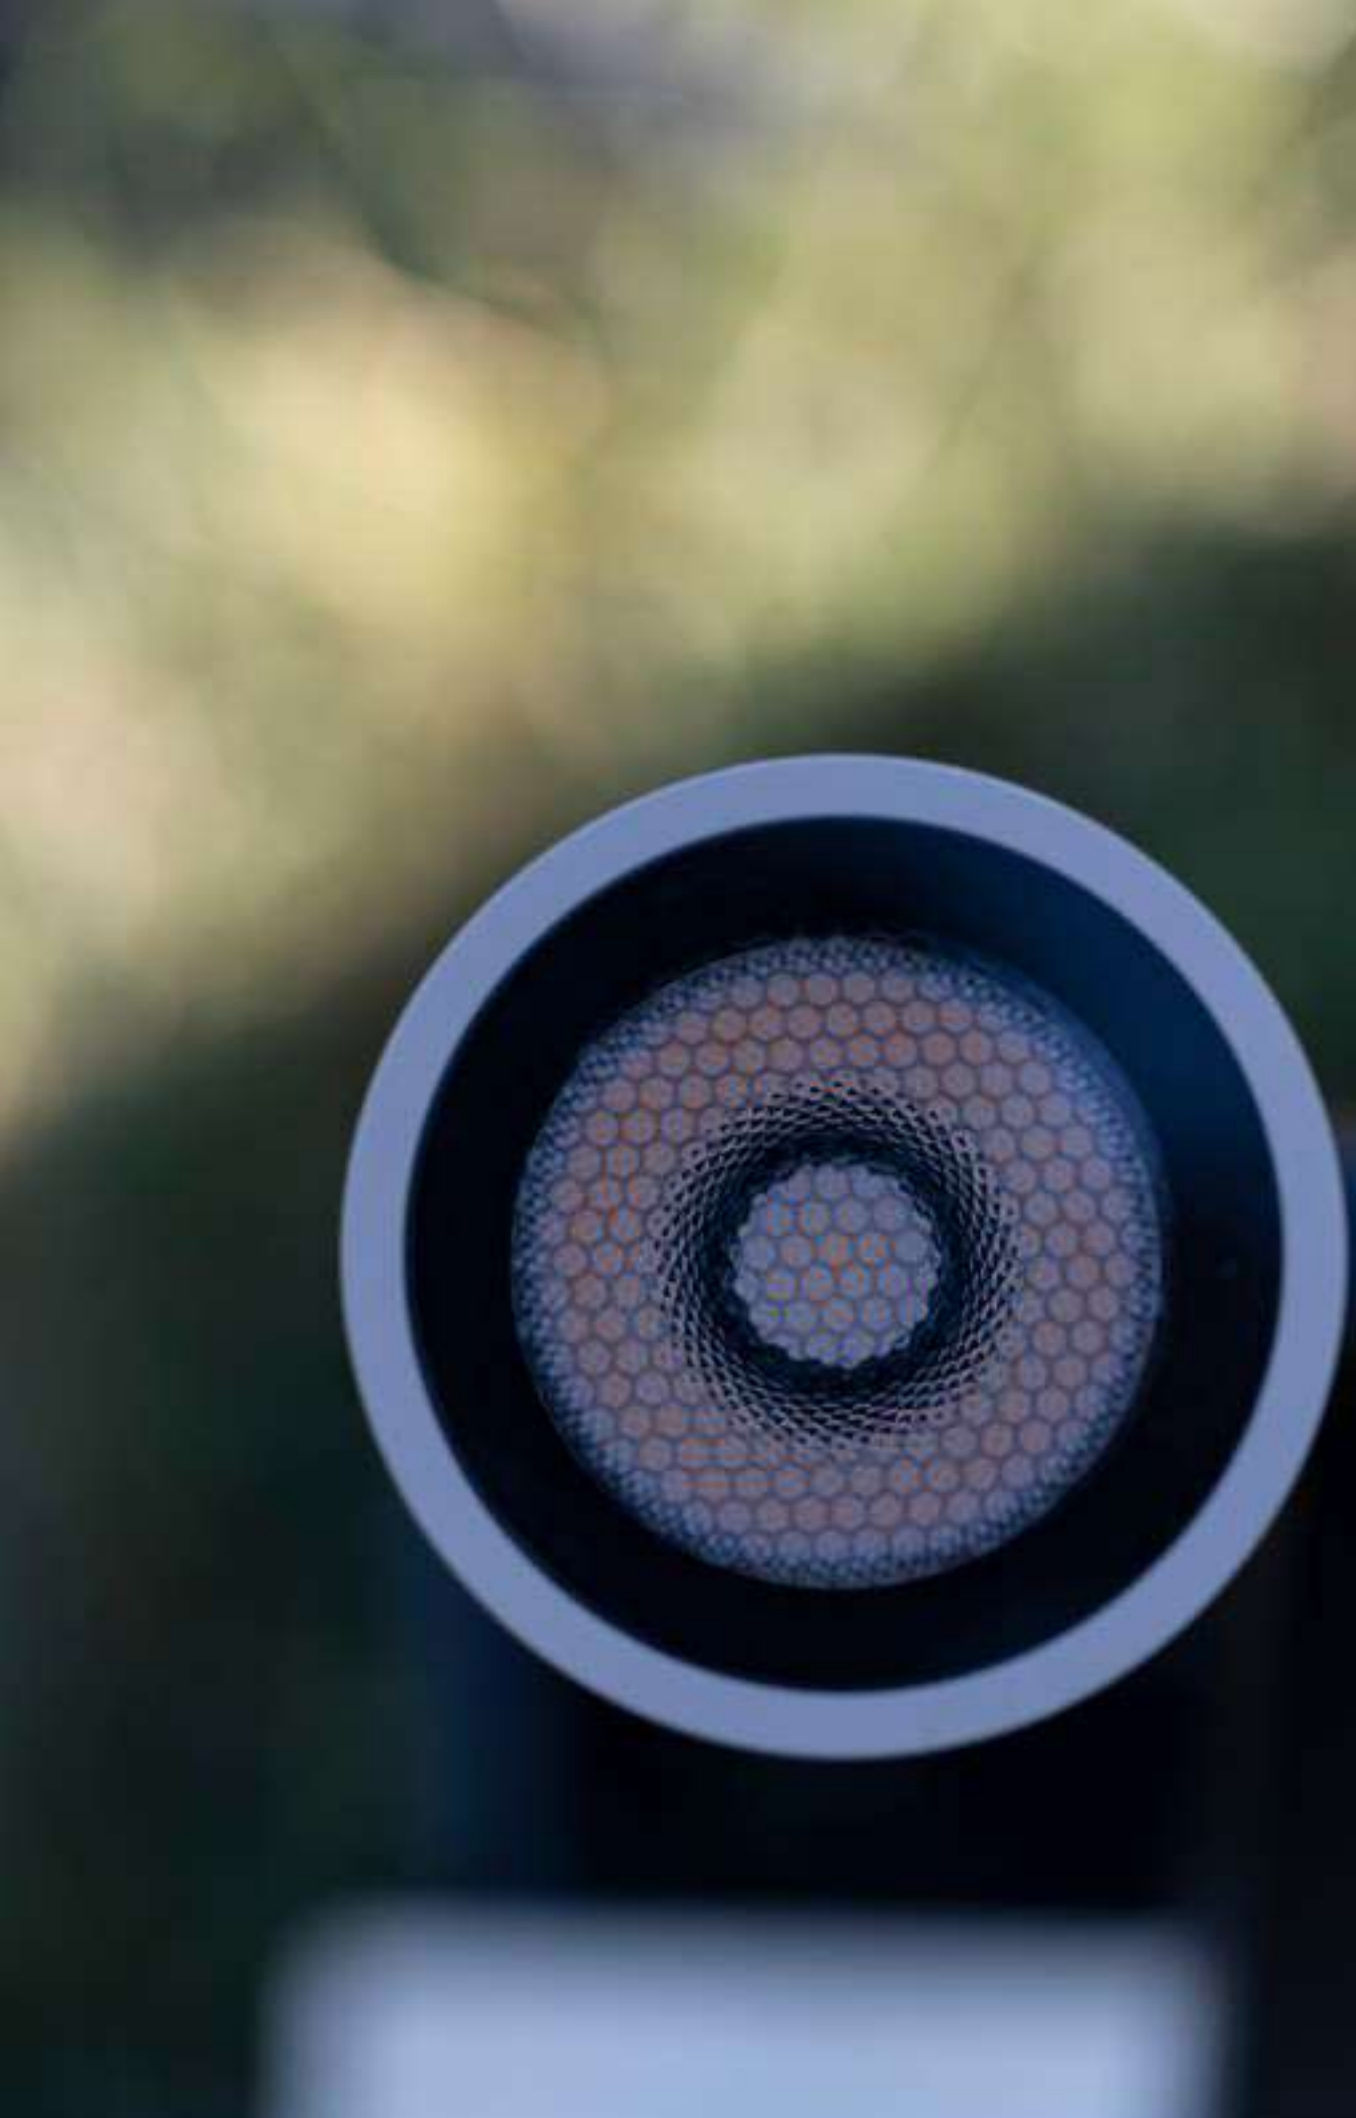






Muse Turn Box

Spot 02

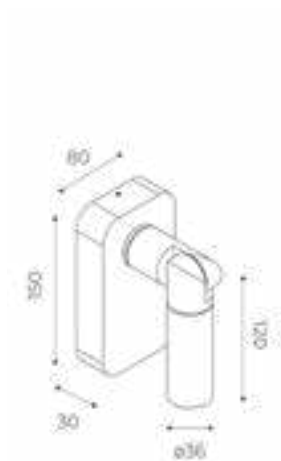

Available finishes:



black

olive green **on request*

Light Source

Supply

CRI

Electrical Class

IP rating

Application

Diffuser

power led

220-240V

≥80

II

65

wall, ground, roof

transparent tempered glass

Power

Led Colour temp.

220-240V 2Wled - 2,8We

2700/3000K




			lm		black
2700K	220-240V	 18°	98	with honeycomb	9020311111
2Wled		 18°	103	without honeycomb	9020311211
2,8We		 36°	74	with honeycomb	9020311311
		 36°	222	without honeycomb	9020311411
			lm		black
3000K	220-240V	 18°	103	with honeycomb	9020111111
2Wled		 18°	178	without honeycomb	9020111211
2,8We		 36°	78	with honeycomb	9020111311
		 36°	234	without honeycomb	9020111411



Muse Turn Box

Spot 03

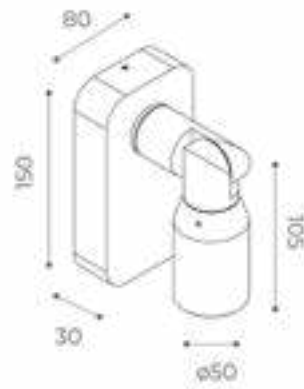

Available finishes:

-  black
-  olive green **on request*

Light Source power led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application wall, ground, roof
Diffuser transparent tempered glass

Power 220-240V 5,8Wled - 8,6We
Led Colour temp. 2700/3000K



				lm	black
2700K 5,8Wled 8,6We	220-240V	10° 	with honeycomb	243	90203110711
		10° 	without honeycomb	405	90203110811
		26° 	with honeycomb	251	90203115111
		26° 	without honeycomb	432	90203116111
		52° 	with honeycomb	135	90203117111
		52° 	without honeycomb	409	90203118111

				lm	black
3000K 5,8Wled 8,6We	220-240V	10° 	with honeycomb	253	90201110711
		10° 	without honeycomb	422	90201110811
		26° 	with honeycomb	264	90201115111
		26° 	without honeycomb	455	90201116111
		52° 	with honeycomb	142	90201117111
		52° 	without honeycomb	431	90201118111







Muse Spot 04

bollard h300



Available finishes:



black

olive green **on request*

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

power led

24V / 220-240V

only 24V (PWM)

≥80

II, III

65

ground

transparent tempered glass

Power

24V 5,8Wled - 6,3We

220-240V 5,8Wled - 8,6We

Led Colour temp.


2700/3000K



					lm	black	
2700K 5,8Wled 8,6We	220-240V	II		10°	243	with honeycomb	90203110911
				10°	405	without honeycomb	90203111011
				26°	251	with honeycomb	9020311911
				26°	432	without honeycomb	9020312011
				52°	135	with honeycomb	9020312111
				52°	409	without honeycomb	9020312211
					lm	black	
2700K 5,8Wled 6,3We	24V	III		10°	243	with honeycomb	90203210911
				10°	405	without honeycomb	90203211011
				26°	251	with honeycomb	9020321911
				26°	432	without honeycomb	9020322011
				52°	135	with honeycomb	9020322111
				52°	409	without honeycomb	9020322211
					lm	black	
3000K 5,8Wled 8,6We	220-240V	II		10°	253	with honeycomb	90201110911
				10°	422	without honeycomb	90201111011
				26°	264	with honeycomb	9020111911
				26°	455	without honeycomb	9020112011
				52°	142	with honeycomb	9020112111
				52°	431	without honeycomb	9020112211
					lm	black	
3000K 5,8Wled 6,3We	24V	III		10°	253	with honeycomb	90201210911
				10°	422	without honeycomb	90201211011
				26°	264	with honeycomb	9020121911
				26°	455	without honeycomb	9020122011
				52°	142	with honeycomb	9020122111
				52°	431	without honeycomb	9020122211

Muse Spot 04

bollard h500

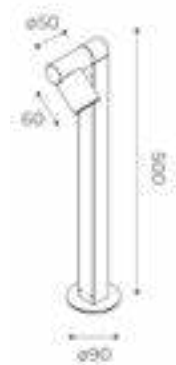

Available finishes:

-  black
-  olive green **on request*

Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 24V 5,8Wled - 6,3We
220-240V 5,8Wled - 8,6We
Led Colour temp. 2700/3000K



				lm		black	
2700K 5,8Wled 8,6We	220-240V	II		10°	243	with honeycomb	9020311111
				10°	405	without honeycomb	9020311121
				26°	251	with honeycomb	9020312311
				26°	432	without honeycomb	9020312411
				52°	135	with honeycomb	9020312511
				52°	409	without honeycomb	9020312611
				lm		black	
2700K 5,8Wled 6,3We	24V	III		10°	243	with honeycomb	9020321111
				10°	405	without honeycomb	9020321121
				26°	251	with honeycomb	9020322311
				26°	432	without honeycomb	9020322411
				52°	135	with honeycomb	9020322511
				52°	409	without honeycomb	9020322611
				lm		black	
3000K 5,8Wled 8,6We	220-240V	II		10°	253	with honeycomb	9020111111
				10°	422	without honeycomb	9020111121
				26°	264	with honeycomb	9020112311
				26°	455	without honeycomb	9020112411
				52°	142	with honeycomb	9020112511
				52°	431	without honeycomb	9020112611
				lm		black	
3000K 5,8Wled 6,3We	24V	III		10°	253	with honeycomb	9020121111
				10°	422	without honeycomb	9020121121
				26°	264	with honeycomb	9020122311
				26°	455	without honeycomb	9020122411
				52°	142	with honeycomb	9020122511
				52°	431	without honeycomb	9020122611

Muse Spot 04

bollard h800

Available finishes:



black

olive green **on request*

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

power led

24V / 220-240V

only 24V (PWM)

≥80

II, III

65

ground

transparent tempered glass

Power

24V 5,8Wled- 6,3We

220-240V 5,8Wled - 8,6We

Led Colour temp.

2700/3000K



				lm	black	
2700K 5,8Wled 8,6We	220-240V	II	10°	243	with honeycomb	90203111311
			10°	405	without honeycomb	90203111411
			26°	251	with honeycomb	90203127111
			26°	432	without honeycomb	90203128111
			52°	135	with honeycomb	90203129111
			52°	409	without honeycomb	90203130111

				lm	black	
2700K 5,8Wled 6,3We	24V	III	10°	243	with honeycomb	90203211311
			10°	405	without honeycomb	90203211411
			26°	251	with honeycomb	90203227111
			26°	432	without honeycomb	90203228111
			52°	135	with honeycomb	90203229111
			52°	409	without honeycomb	90203230111

				lm	black	
3000K 5,8Wled 8,6We	220-240V	II	10°	253	with honeycomb	90201111311
			10°	422	without honeycomb	90201111411
			26°	264	with honeycomb	90201127111
			26°	455	without honeycomb	90201128111
			52°	142	with honeycomb	90201129111
			52°	431	without honeycomb	90201130111

				lm	black	
3000K 5,8Wled 6,3We	24V	III	10°	253	with honeycomb	90201211311
			10°	422	without honeycomb	90201211411
			26°	264	with honeycomb	90201227111
			26°	455	without honeycomb	90201228111
			52°	142	with honeycomb	90201229111
			52°	431	without honeycomb	90201230111





Muse Spot 02 Bend-Shape Stem

h500



Available finishes:



black

olive green

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

power led

24V / 220-240V

only 24V (PWM)

≥80

II, III

65

ground

transparent tempered glass

Power

24V 2Wled- 3We

220-240V 2Wled - 2,8We

Led Colour temp.

2700/3000K



WITH BASE

				lm		black	green	
2700K	24V	III		18°	98	with honeycomb	9020323111	9020323116
2Wled				18°	169	without honeycomb	9020323211	9020323216
3We				36°	75	with honeycomb	9020323511	9020323516
				36°	224	without honeycomb	9020323611	9020323616

				lm		black	green
2700K	220-240V	II	18°	98	with honeycomb	9020313111	9020313116
2Wled			18°	169	without honeycomb	9020313211	9020313216
2,8We			36°	75	with honeycomb	9020313511	9020313516
			36°	224	without honeycomb	9020313611	9020313616

				lm		black	green
3000K	24V	III	18°	103	with honeycomb	9020123111	9020123116
2Wled			18°	178	without honeycomb	9020123211	9020123216
3We			36°	79	with honeycomb	9020123511	9020123516
			36°	236	without honeycomb	9020123611	9020123616

				lm		black	green
3000K	220-240V	II	18°	103	with honeycomb	9020113111	9020113116
2Wled			18°	178	without honeycomb	9020113211	9020113216
2,8We			36°	79	with honeycomb	9020113511	9020113516
			36°	236	without honeycomb	9020113611	9020113616

WITH SPIKE


				lm		black	green
2700K	24V	III	18°	98	with honeycomb	9020323311	9020323316
2Wled			18°	169	without honeycomb	9020323411	9020323416
3We			36°	75	with honeycomb	9020323711	9020323716
			36°	224	without honeycomb	9020323811	9020323816

				lm		black	green
3000K	24V	III	18°	103	with honeycomb	9020123311	9020123316
2Wled			18°	178	without honeycomb	9020123411	9020123416
3We			36°	79	with honeycomb	9020123711	9020123716
			36°	236	without honeycomb	9020123811	9020123816

Muse Spot 02 Bend-Shape Stem

h800

Available finishes:



Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

power led

24V / 220-240V

only 24V (PWM)

≥80

II, III

65

ground

transparent tempered glass

Power

24V 2Wled- 3We

220-240V 2Wled - We

Led Colour temp.

2700/3000K



WITH BASE

WITH BASE				lm		black	green	
2700K 2Wled 3We	24V	III		18°	98	with honeycomb	9020323911	9020323916
				18°	169	without honeycomb	9020324011	9020324016
				36°	75	with honeycomb	9020324311	9020324316
				36°	224	without honeycomb	9020324411	9020324416
				lm		black	green	
2700K 2Wled 2,8We	220-240V	II		18°	98	with honeycomb	9020313911	9020313916
				18°	169	without honeycomb	9020314011	9020314016
				36°	75	with honeycomb	9020314311	9020314316
				36°	224	without honeycomb	9020314411	9020314416
				lm		black	green	
3000K 2Wled 3We	24V	III		18°	103	with honeycomb	9020123911	9020123916
				18°	178	without honeycomb	9020124011	9020124016
				36°	79	with honeycomb	9020124311	9020124316
				36°	236	without honeycomb	9020124411	9020124416
				lm		black	green	
3000K 2Wled 2,8We	220-240V	II		18°	103	with honeycomb	9020113911	9020113916
				18°	178	without honeycomb	9020114011	9020114016
				36°	79	with honeycomb	9020114311	9020114316
				36°	236	without honeycomb	9020114411	9020114416

WITH SPIKE


WITH SPIRE				lm		black	green	
2700K 2Wled 3We	24V	III		18°	98	with honeycomb	9020324111	9020324116
				18°	169	without honeycomb	9020324211	9020324216
				36°	75	with honeycomb	9020324511	9020324516
				36°	224	without honeycomb	9020324611	9020324616
				lm		black	green	
3000K 2Wled 3We	24V	III		18°	103	with honeycomb	9020124111	9020124116
				18°	178	without honeycomb	9020124211	9020124216
				36°	79	with honeycomb	9020124511	9020124516
				36°	236	without honeycomb	9020124611	9020124616

Muse Spot 03 Bend-Shape Stem

h500



Available finishes:



Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 24V 5,8Wled- 6,3We
220-240V 5,8Wled - 8,6We
Led Colour temp. 2700/3000K



WITH BASE


					lm		black	green
2700K 5,8Wled 6,3We	24V	III	▲	10°	243	with honeycomb	90203211511	9020321516
			▲	10°	405	without honeycomb	90203211611	9020321616
			▲	26°	251	with honeycomb	9020324711	9020324716
			▲	26°	432	without honeycomb	9020324811	9020324816
			▲	52°	135	with honeycomb	9020325111	9020325116
			▲	52°	409	without honeycomb	9020325211	9020325216
2700K 5,8Wled 6,3We	220-240V	II	▲	10°	243	with honeycomb	90203111511	90203111516
			▲	10°	405	without honeycomb	90203111611	90203111616
			▲	26°	251	with honeycomb	9020314711	9020314716
			▲	26°	432	without honeycomb	9020314811	9020314816
			▲	52°	135	with honeycomb	9020315111	9020315116
			▲	52°	409	without honeycomb	9020315211	9020315216
3000K 5,8Wled 6,3We	24V	III	▲	10°	253	with honeycomb	90201211511	9020121516
			▲	10°	422	without honeycomb	90201211611	9020121616
			▲	26°	264	with honeycomb	9020124711	9020124716
			▲	26°	455	without honeycomb	9020124811	9020124816
			▲	52°	142	with honeycomb	9020125111	9020125116
			▲	52°	431	without honeycomb	9020125211	9020125216
3000K 5,8Wled 6,3We	220-240V	II	▲	10°	253	with honeycomb	90201111511	90201111516
			▲	10°	422	without honeycomb	90201111611	90201111616
			▲	26°	264	with honeycomb	9020114711	9020114716
			▲	26°	455	without honeycomb	9020114811	9020114816
			▲	52°	142	with honeycomb	9020115111	9020115116
			▲	52°	431	without honeycomb	9020115211	9020115216

WITH SPIKE


					lm		black	green
2700K 5,8Wled 6,3We	24V	III	▲	10°	243	with honeycomb	90203211711	90203211716
			▲	10°	405	without honeycomb	90203211811	90203211816
			▲	26°	251	with honeycomb	9020324911	9020324916
			▲	26°	432	without honeycomb	9020325011	9020325016
			▲	52°	135	with honeycomb	9020325311	9020325316
			▲	52°	409	without honeycomb	9020325411	9020325416
3000K 5,8Wled 6,3We	24V	II	▲	10°	253	with honeycomb	90201211711	90201211716
			▲	10°	422	without honeycomb	90201211811	90201211816
			▲	26°	264	with honeycomb	9020124911	9020124916
			▲	26°	455	without honeycomb	9020125011	9020125016
			▲	52°	142	with honeycomb	9020125311	9020125316
			▲	52°	431	without honeycomb	9020125411	9020125416

Muse Spot 03 Bend-Shape Stem

h800

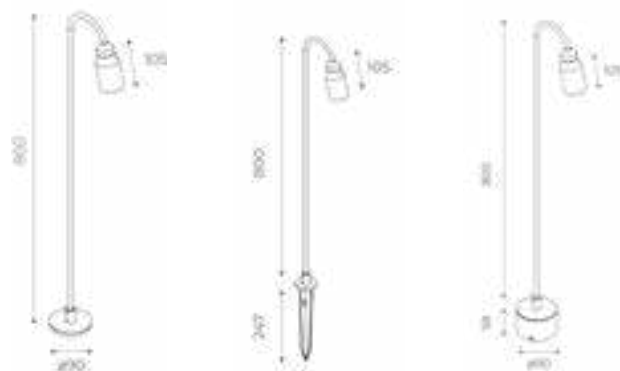

Available finishes:



Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 24V 5,8Wled- 6,3We
220-240V 5,8Wled - 8,6We
Led Colour temp. 2700/3000K



WITH BASE


WITH BASE				lm		black	green
2700K 5,8Wled 6,3We	24V	III	 10°	243	with honeycomb	90203211911	90203211916
			 10°	405	without honeycomb	90203212011	90203212016
			 26°	251	with honeycomb	9020325511	9020325516
			 26°	432	without honeycomb	9020325611	9020325616
			 52°	135	with honeycomb	9020325911	9020325916
			 52°	409	without honeycomb	9020326011	9020326016
2700K 5,8Wled 6,3We	220-240V	II	 10°	243	with honeycomb	90203111911	90203111916
			 10°	405	without honeycomb	90203112011	90203112016
			 26°	251	with honeycomb	9020315511	9020315516
			 26°	432	without honeycomb	9020315611	9020315616
			 52°	135	with honeycomb	9020315911	9020315916
			 52°	409	without honeycomb	9020316011	9020316016
3000K 5,8Wled 6,3We	24V	III	 10°	253	with honeycomb	90201211911	90201211916
			 10°	422	without honeycomb	90201212011	90201212016
			 26°	264	with honeycomb	9020125511	9020125516
			 26°	455	without honeycomb	9020125611	9020125616
			 52°	142	with honeycomb	9020125911	9020125916
			 52°	431	without honeycomb	9020126011	9020126016
3000K 5,8Wled 6,3We	220-240V	II	 10°	253	with honeycomb	90201111911	90201111916
			 10°	422	without honeycomb	90201112011	90201112016
			 26°	264	with honeycomb	9020115511	9020115516
			 26°	455	without honeycomb	9020115611	9020115616
			 52°	142	with honeycomb	9020115911	9020115916
			 52°	431	without honeycomb	9020116011	9020116016

WITH SPIKE

WITH SPIKE				lm		black	green	
2700K 5,8Wled 6,3We	24V	III		10°	243	with honeycomb	90203212111	90203212116
				10°	405	without honeycomb	90203212211	90203212216
				26°	251	with honeycomb	9020325711	9020325716
				26°	432	without honeycomb	9020325811	9020325816
				52°	135	with honeycomb	9020326111	9020326116
				52°	409	without honeycomb	9020326211	9020326216
3000K 5,8Wled 6,3We	24V	III		10°	253	with honeycomb	90201212111	90201212116
				10°	422	without honeycomb	90201212211	90201212216
				26°	264	with honeycomb	9020125711	9020125716
				26°	455	without honeycomb	9020125811	9020125816
				52°	142	with honeycomb	9020126111	9020126116
				52°	431	without honeycomb	9020126211	9020126216




ACCESSORIES




Power supply 8V 220-240V IP54
44x46x26mm

code **9037**




Power supply 220-240V DC 70W
IP67
267x79x52mm

code **9049**




Power supply 220-240V 16Watt
IP20
118x52x26mm

code **9006**




Power supply 220-240V DC 150W
IP67 267x79x52mm

code **9057**




Power supply 220-240V 20Watt
IP20 103x67x21mm

code **9007**



Anchor bolts
Ø88x165mm

code **9062**



Power supply 220-240V 50Watt
IP20 190x60x36mm

code **9008**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9049 / 9057 / 9062**



Tree Spot

LIGHT ON A TREE

The alternative to the traditional outdoor installation is the Tree Spot product, a spotlight offered in three different versions, in terms of size and power.

The models are equipped with a specific mounting base and strap.

The structure is made of machined aluminum, treated with a cataphoresis bath, and coated with polyester powder paint. Screen-printed, tempered glass is fixed using robotic technology and silicone adhesive to ensure the IP rating.

All versions are equipped with Power LED and CoB LED in 3000K and 2700K colors.

The power supply is 24V via a standard IP connector; any additional cables should be ordered separately, as well as power supplies and junction boxes

L'alternativa alla classica installazione per esterni è il prodotto Tree Spot, proiettore offerto in tre versioni differenti sia per le dimensioni che per la potenza.

I modelli sono dotati di specifica basetta di fissaggio e cinghia.

Struttura in alluminio tornito, trattato con bagno di cataforesi e verniciato con polvere poliestere, vetro temprato incollato serigrafato, fissato con tecnologia robotica e collante siliconico per garantirne la tenuta IP; tutti equipaggiati da power Led e CoB Led in colorazione 3000K e 2700K.

L'alimentazione è a 24V tramite connettore IP di serie; eventuali cavi accessori sono da ordinare separatamente, come gli alimentatori e scatole di derivazione.



Technical drawing of a plug with dimensions 134 and Ø36.

Available finishes:



black

olive green *on request

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

power led

24V

PWM

 ≥ 80

III

65

tree

transparent tempered glass

Power

Led Colour temp.

24V 2Wled- 3We

2700/3000K



				lm	black
2700K	24V	18°	with honeycomb	98	9026320011
2Wled		18°	without honeycomb	103	9026320111
3 We		36°	with honeycomb	74	9026320211
		36°	without honeycomb	222	9026320311

				lm	black
3000K	24V	18°	with honeycomb	103	9026120011
2Wled		18°	without honeycomb	178	9026120111
3 We		36°	with honeycomb	78	9026120211
		36°	without honeycomb	234	9026120311



Tree Spot 03



strap lenght l 1000mm

Available finishes:




black

olive green **on request*

Light Source	power led
Supply	24V
Dimmer	PWM
CRI	≥80
Electrical Class	III
IP rating	65
Application	tree
Diffuser	transparent tempered glass

Power	24V 5,8Wled- 6,3We
Led Colour temp.	2700/3000K




				lm	black
2700K	24V	10°	with honeycomb	243	9026320411
5,8Wled		10°	without honeycomb	405	9026320511
6,3We		26°	with honeycomb	251	9026320611
		26°	without honeycomb	432	9026320711
		52°	with honeycomb	135	9026320811
		52°	without honeycomb	409	9026320911

				lm	black
3000K	24V	10°	with honeycomb	253	9026120411
5,8Wled		10°	without honeycomb	422	9026120511
6,3We		26°	with honeycomb	264	9026120611
		26°	without honeycomb	455	9026120711
		52°	with honeycomb	142	9026120811
		52°	without honeycomb	431	9026120911



Tree Spot 05



strap length l 1000mm

Available finishes:



black

olive green **on request*

Light Source	power led
Supply	24V
Dimmer	PWM
CRI	≥80
Electrical Class	III
IP rating	65
Application	tree
Diffuser	transparent tempered glass

Power	24V 9Wled - 10We
Led Colour temp.	2700/3000K




				lm	black
2700K	24V	15°	▲		9026321011
9Wled		15°	▲	816	9026321111
10We		36°	▲		9026321211
		36°	▲	810	9026321311
		60°	▲	764	9026321411


				lm	black
3000K	24V	15°	▲		9026121011
9Wled		15°	▲	860	9026121111
10We		36°	▲		9026121211
		36°	▲	857	9026121311
		60°	▲	805	9026121411



ACCESSORIES




Power supply 16W220-240
IP65
125x61x31mm
code **9059**




Power supply 220-240V DC 70W
IP67
267x79x52mm
code **9049**




IP68 connection box gel
code **9080**



Power supply 220-240V DC 150W
IP67 267x79x52mm
code **9057**



2 poles cable l 5000mm
incl. female connecton
code **9081**



2 poles cable l 10000mm
incl. female connecton
code **9082**

ACCESSORIES:

code **9059 / 9049 / 9057 / 9080 / 9081 / 9082**



Lila

THE PERFECT HARMONY BETWEEN THE NEED FOR LIGHT AND THE LONGING FOR BEAUTY

Discreet bollard, represents the perfect balance between contemporary design and decorative minimalism.

Lila is available in two heights. It features a steel stem treated and painted with black polyester powder, suitable for surface installation with a base or in the ground with a spike.

The diffuser is made of methacrylate with an integrated 24V LED board in 2700K and 3000K colors. A black aluminum anti-glare cover can be purchased separately

Un disco di luce sospeso nel verde degli spazi outdoor.

Lila, bollard estremamente discreto, rappresenta il perfetto equilibrio fra contemporaneità e minimalismo decorativo.

Lila è proposto in due altezze.

Caratterizzato da uno stelo in acciaio trattato e verniciato a polvere di poliestere nel colore nero, è adatto all'installazione su superficie nella versione con base o nel terreno con il picchetto.

Il diffusore è in metacrilato con scheda led 24V integrata nei colori 2700K e 3000K, acquistabile separatamente una cover antiabbagliamento in alluminio nero.










Lila

h430 / h730

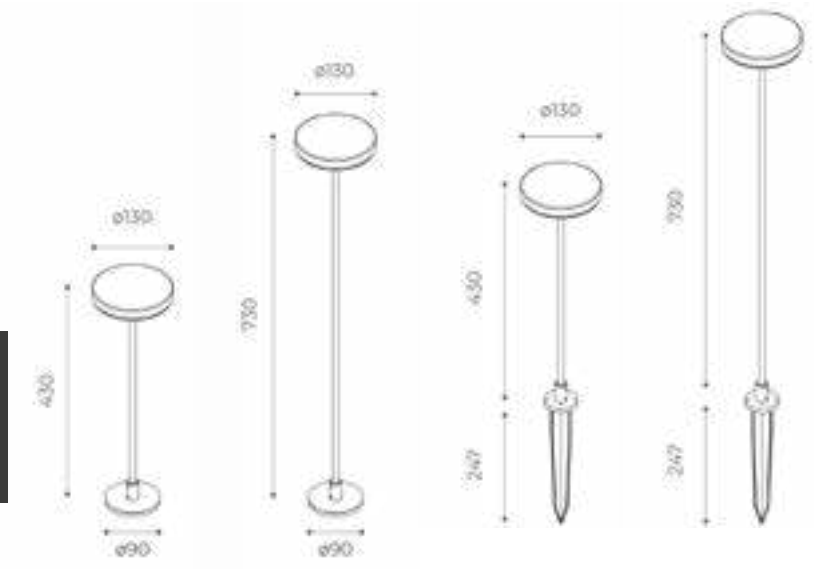

Available finishes:

-  black
-  olive green

Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application floor, ground
Diffuser sandblasted methacrylate

Power 24V - 6WeLed
Led Colour temp. 2700K / 3000K



h430

		lm		black	green
2700K	24V	560	with base	9025310011	9025310016
6Wled		560	with spike	9025310211	9025310216


3000K	24V	578	with base	9025110011	9025110016
6Wled		578	with spike	9025110211	9025110216

h730


		lm		black	green
2700K	24V	560	with base	9025310111	9025310116
6Wled		560	with spike	9025310311	9025310316

3000K	24V	578	with base	9025110111	9025110116
6Wled		578	with spike	9025110311	9025110316


ACCESSORIES




Top Cover
colour **Black**
code **9076**




Power supply 220-240V DC 150W
IP67 267x79x52mm
code **9057**



Power supply 220-240V DC 70W
IP67
267x79x52mm
code **9049**



SPD CL.I 12KV 320V UC max
40x57x20mm
code **9058**



Cover colour **Green**
code **90716**



ACCESSORIES:

code **9076 / 9049 / 9057 / 9058 / 90716**



Sofia

SPACE EXISTS WITH THE LIGHT THAT ILLUMINATES IT

Sofia Bollard ideal for gardens and green spaces, in extruded and die-cast aluminium, the LED board is fixed under the head and sealed with glass glued to the body with silicone glue.

Available in three heights (h.160mm; h.500mm; h.800mm).

Equipped with Mid-power LEDs in 2700K and 3000K, the LED board is powered by 24V or directly by 230V mains voltage.

The minimal line makes it suitable for all types of settings and the possibility of choosing between fixing with base or spike to all types of surfaces.

Sofia, un bollard ideale per giardini e spazi verdi, in alluminio estruso e pressofuso, finito con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

La scheda led è fissata sotto la testa e sigillata con vetro incollato al corpo con collante silicico.

Equipaggiato da Mid-power Led in 2700K o 3000K alimentati a 24V o 230V in tensione diretta di rete.

Disponibile in tre altezze (h.160mm; h.500mm; h.800mm)

La linea minimale lo rende adatto a tutti i tipi di ambientazione e la possibilità di scegliere fra fissaggio con base o picchetto a tutti i tipi di terreni.









Sofia Base e Spike

h160

Available finishes:

	white
	sand
	graphite
	aluminium
	corten
	olive green <i>*on request</i>

Light Source
Supply


Dimmer

CRI
Electrical Class
IP rating
Application
Diffuser

mid power led
24V or 220-240V
mains voltage
only 24V (PWM)
230V phase cut
≥80
I, III
65
floor
transparent tempered glass

Power
Led Colour temp.

10We 230V / 24V 10Wled
2700K/3000K

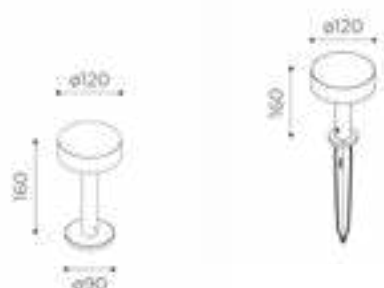

			lm	white	sand	graphite	aluminium	corten
2700K	220-240V	Base	1094	901237062	901237063	901237064	901237065	901237068
10W@230V		Spike	1094	901237122	901237123	901237124	901237125	901237128

			lm	white	sand	graphite	aluminium	corten
3000K	220-240V	Base	1152	901217062	901217063	901217064	901217065	901217068
10W@230V		Spike	1152	901217122	901217123	901217124	901217125	901217128

			lm	white	sand	graphite	aluminium	corten
2700K	24V III	Base	1094	901237092	901237093	901237094	901237095	901237098
10Wled		Spike	1094	901237152	901237153	901237154	901237155	901237158

			lm	white	sand	graphite	aluminium	corten
3000K	24V III	Base	1152	901217092	901217093	901217094	901217095	901217098
10Wled		Spike	1152	901217152	901217153	901217154	901217155	901217158

Sofia Base e Spike

h500

Available finishes:

	white
	sand
	graphite
	aluminium
	corten
	olive green <i>*on request</i>

Light Source
Supply

Dimmer

CRI

Electrical Class

IP rating


Application

Diffuser

mid power led
24V or 220-240V
mains voltage
only 24V (PWM)
230V phase cut
≥80
I, III
65
floor
transparent tempered glass

Power
Led Colour temp.

10We 230V / 24V 10Wled
2700K/3000K

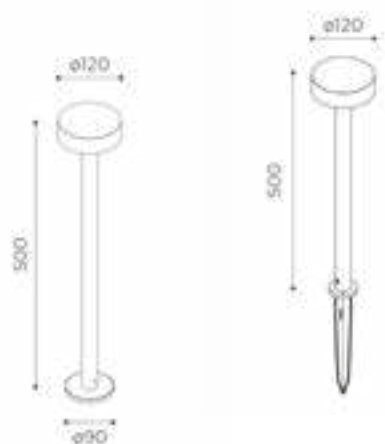

			lm	white	sand	graphite	aluminium	corten
2700K	220-240V	Base	1094	901237072	901237073	901237074	901237075	901237078
10W@230V		Spike	1094	901237132	901237133	901237134	901237135	901237138

			lm	white	sand	graphite	aluminium	corten
3000K	220-240V	Base	1152	901217072	901217073	901217074	901217075	901217078
10W@230V		Spike	1152	901217132	901217133	901217134	901217135	901217138

			lm	white	sand	graphite	aluminium	corten
2700K	24V III	Base	1094	901237102	901237103	901237104	901237105	901237108
10Wled		Spike	1094	901237162	901237163	901237164	901237165	901237168

			lm	white	sand	graphite	aluminium	corten
3000K	24V III	Base	1152	901217102	901217103	901217104	901217105	901217108
10Wled		Spike	1152	901217162	901217163	901217164	901217165	901217168

Sofia Base e Spike


h800

Available finishes:

- white
- sand
- graphite
- aluminium
- corten
- olive green **on request*

Light Source mid power led
Supply 24V or 220-240V
Dimmer mains voltage
CRI only 24V (PWM)
Electrical Class 230V phase cut
IP rating ≥80
Application I, III
Diffuser 65
floor
transparent tempered glass

Power 10We 230V / 24V 10Wled
Led Colour temp. 2700K/3000K

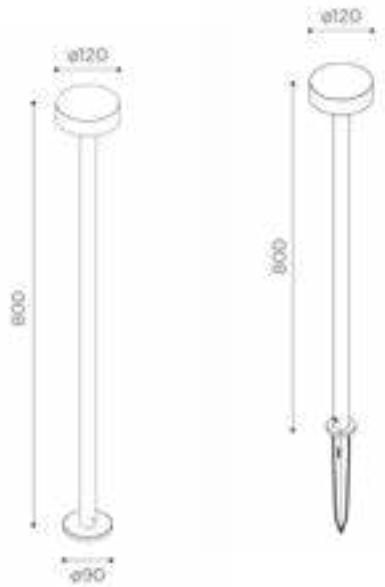


			lm	white	sand	graphite	aluminium	corten
2700K 10W@230V	220-240V	Base	1094	901237082	901237083	901237084	901237085	901237088
		Spike	1094	901237142	901237143	901237144	901237145	901237148

			lm	white	sand	graphite	aluminium	corten
3000K 10W@230V	220-240V	Base	1152	901217082	901217083	901217084	901217085	901217088
		Spike	1152	901217142	901217143	901217144	901217145	901217148


			lm	white	sand	graphite	aluminium	corten
2700K 10Wled	24V	Base	1094	901237112	901237113	901237114	901237115	901237118
		Spike	1094	901237172	901237173	901237174	901237175	901237178

			lm	white	sand	graphite	aluminium	corten
3000K 10Wled	24V	Base	1152	901217112	901217113	901217114	901217115	901217118
		Spike	1152	901217172	901217173	901217174	901217175	901217178


ACCESSORIES




Shield 180°
code **9044**




Power 220-240V DC 70W IP67
267x79x52mm
code **9049**



2 way - 3 poles terminal block IP68
Ø23x66mm
code **9004**



Power 220-240V DC 150W IP67
267x79x52mm
code **9057**



3-4 way - 4 poles terminal block
IP68
53x26x82mm
code **9005**



ACCESSORIES:

code 9044 / 9004 / 9005 / 9049 / 9057



Matita

SKETCHING SOFT LINES

Matita is a Bollard in extruded and die-cast aluminium, with a minimal line and characterized by the absence of a cylindrical diffuser, which is instead fixed under the head with silicone glue to guarantee IP tightness.

Available in three heights: h.160mm; h.500mm; h.800mm, led colours 2700K or 3000K and powered at low voltage or with integrated power supply.

The cleaning of the lines and the possibility of reducing the luminance with the use of the black instead of the white conical reflector, make Matita a bollard with multiple uses.

Matita è un bollard in alluminio estruso e pressofuso finito con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Dalla linea minimale, è caratterizzato dall'assenza di un diffusore cilindrico, che è invece fissato sotto la testa con collante siliconico a garanzia della tenuta IP.

Equipaggiato con scheda Mid-power Led 2700K o 3000K e disponibile in tre altezze: h.160mm; h.500mm; h.800mm.

È alimentato a bassa tensione o con alimentatore integrato.

La pulizia delle linee e la possibilità di ridurre la luminanza (possibilità di scegliere la versione con riflettore conico nero) rendono matita un bollard dai molteplici utilizzi.





Matita

h160



Available finishes:

	white
	sand
	graphite
	aluminium
	corten
	olive green <i>*on request</i>

Light Source
Supply

mid power led
220-240V direct
or 220-240V power supply
included

Dimmer

230V phase cut
≥80

CRI

I, II

Electrical Class

IP rating

65

Application

floor

Diffuser

transparent tempered glass

Power

10We direct / 220-240V

10WLed - 13,5We

Led Colour temp.

2700K/3000K



				lm	white	sand	graphite	aluminium	corten
2700K	220- 240V	I	White Reflector	1094	900331102	900331103	900331104	900331105	900331108
10W@230V			Black Reflector	765	900331112	900331113	900331114	900331115	900331118

				lm	white	sand	graphite	aluminium	corten
3000K	220- 240V	I	White Reflector	1152	900311102	900311103	900311104	900311105	900311108
10W@230V			Black Reflector	806	900311112	900311113	900311114	900311115	900311118

				lm	white	sand	graphite	aluminium	corten
2700K	220- 240V	II	White Reflector	1100	900330012	900330013	900330014	900330015	900330018
10Wled			Black Reflector	880	900330062	900330063	900330064	900330065	900330068
13,5We									

				lm	white	sand	graphite	aluminium	corten
3000K	220- 240V	II	White Reflector	1158	900310012	900310013	900310014	900310015	900310018
10Wled			Black Reflector	926	900310062	900310063	900310064	900310065	900310068
13,5We									

Matita

h500



Available finishes:

	white
	sand
	graphite
	aluminium
	corten
	olive green <i>*on request</i>

Light Source
Supply

mid power led
220-240V direct
or 220-240V power supply
included

Dimmer

upon request
for power supply version

CRI

≥80

Electrical Class

I, II

IP rating

65

Application

floor

Diffuser

transparent tempered glass

Power

10We direct / 220-240V

Led Colour temp.

10WLed - 13,5We

2700K/3000K



				lm	white	sand	graphite	aluminium	corten
2700K	220- 240V	I	White Reflector	1094	900331122	900331123	900331124	900331125	900331128
10W@230V			Black Reflector	765	900331132	900331133	900331134	900331135	900331138

				lm	white	sand	graphite	aluminium	corten
3000K	220- 240V	I	White Reflector	1152	900311122	900311123	900311124	900311125	900311128
10W@230V			Black Reflector	806	900311132	900311133	900311134	900311135	900311138

				lm	white	sand	graphite	aluminium	corten
2700K	220- 240V	II	White Reflector	1100	900330032	900330033	900330034	900330035	900330038
16,5W			Black Reflector	880	900330072	900330073	900330074	900330075	900330078

				lm	white	sand	graphite	aluminium	corten
3000K	220- 240V	II	White Reflector	1158	900310032	900310033	900310034	900310035	900310038
16,5W			Black Reflector	926	900310072	900310073	900310074	900310075	900310078

Matita

h800



Available finishes:

	white
	sand
	graphite
	aluminium
	corten
	olive green <i>*on request</i>

Light Source
Supply

mid power led
220-240V direct
or 220-240V power supply
included

Dimmer

upon request
for power supply version

CRI

≥80

Electrical Class

I, II

IP rating

65

Application

floor

Diffuser

transparent tempered glass

Power

10We direct / 220-240V

Led Colour temp.

16,5WLed

2700K/3000K




				lm	white	sand	graphite	aluminium	corten
2700K	220- 240V	I	White Reflector	1094	900331142	900331143	900331144	900331145	900331148
10W@230V			Black Reflector	765	900331152	900331153	900331154	900331155	900331158

				lm	white	sand	graphite	aluminium	corten
3000K	220- 240V	I	White Reflector	1152	900311142	900311143	900311144	900311145	900311148
10W@230V			Black Reflector	806	900311152	900311153	900311154	900311155	900311158

				lm	white	sand	graphite	aluminium	corten
2700K	220- 240V	II	White Reflector	1100	900330052	900330053	900330054	900330055	900330058
16,5Wled			Black Reflector	880	900330082	900330083	900330084	900330085	900330088

				lm	white	sand	graphite	aluminium	corten
3000K	220- 240V	II	White Reflector	1158	900310052	900310053	900310054	900310055	900310058
10Wled			Black Reflector	926	900310082	900310083	900310084	900310085	900310088

ACCESSORIES




Shield 180°

code **9044**



Anchor bolts
Ø117x161mm

code **9009**



2-3 way 3 poles terminal block IP68
62x35x178mm

code **9036**

ACCESSORIES:

code **9044 / 9009 / 9036**



Nail

STEADY LIKE A LIGHTHOUSE THAT GUIDES SAILOR HOME

Pole top made of die-cast aluminum, finished with cataphoresis treatment and a layer of polyester powder coating, resistant to outdoor environments.

Nail is characterized by a clean and essential design, efficient and adaptable to any type of installation.

Equipped with Power LEDs in 3000K color temperature, it is available in two versions: with optics or with a diffused beam, thanks to frosted glass.

The power supply is integrated into the pole, using a special sealed capsule that is easy to install with connectors.

The variety of pole heights and the available in sand and white colors make NAIL suitable even for residential settings.

Testa palo in alluminio pressofuso, finito con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Nail è caratterizzato da una linea pulita ed essenziale, efficiente e che si adatta facilmente ad ogni tipo di installazione.

Equipaggiato con Power Led, nella colorazione 3000K, si propone in due versioni: con ottiche oppure con fascio diffuso grazie al vetro sabbia-to.

L'alimentazione è integrata nel palo, grazie ad una speciale capsula stagna di facile installazione grazie all'utilizzo di connettori.

La proposta di molteplici altezze per i pali e i colori sabbia e bianco, rendono NAIL adatto anche ad un ambito residenziale.





Nail Transparent Glass


Ø60/Ø76

Available finishes:

- white
- sand
- graphite
- olive green **on request*

Light Source
power led
Supply
220-240V
Dimmer
upon request
CRI
≥80
IP rating
IP65
Electrical Class
I
Application
top pole
Diffuser
tempered transparent glass

Power
220-240V 36WeLed 40We
Led Colour temp.
3000K

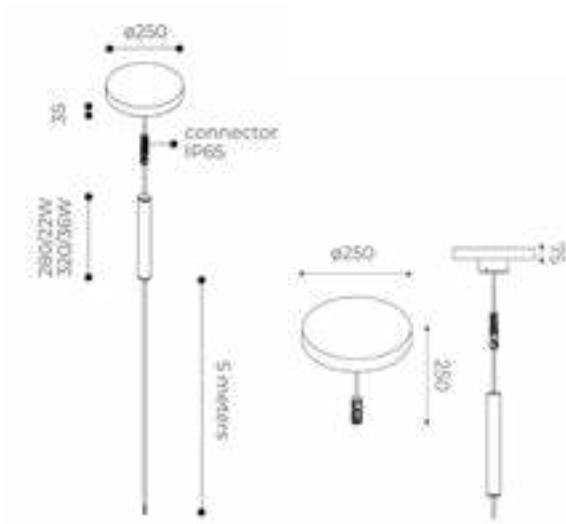

Ø60

			lm	white	sand	graphite
3000K	220- 240V	30°	4960	902111002	902111003	902111004
36Wled		120°	4660	902111012	902111013	902111014
40We		150°	3990	902111022	902111023	902111024

Ø76

3000K	220- 240V	30°	4960	902111032	902111033	902111034
36Wled		120°	4660	902111042	902111043	902111044
40We		150°	3990	902111052	902111053	902111054

Nail Sandblasted Glass

Ø60

Available finishes:

- white
- sand
- graphite
- olive green **on request*


Light Source power led
Supply 220 - 240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application top pole
Diffuser tempered transparent glass

Power 220-240V 22Wled 25We
Led Colour temp. 3000K



Ø60

			lm	white	sand	graphite
3000K 22Wled 25We	220- 240V	diffused 	2330	902111062	902111063	902111064

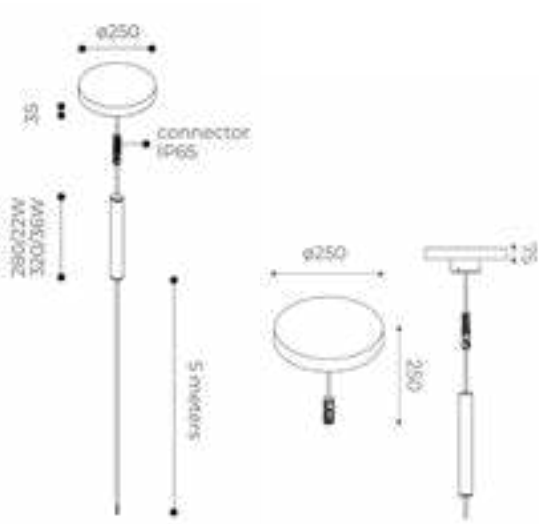



ACCESSORIES



Ø60mm
h1200mm
colour **White**

code **90672**

Ø60mm
h1200mm
colour **Sand**

code **90673**

Ø60mm
h1200mm
colour **Graphite**

code **90674**



Ø60mm
h1600mm
colour **White**

code **90682**

Ø60mm
h1600mm
colour **Sand**

code **90683**

Ø60mm
h1600mm
colour **Graphite**

code **90684**



Ø60mm
h2600mm
colour **White**

code **90692**

Ø60mm
h2600mm
colour **Sand**

code **90693**

Ø60mm
h2600mm
colour **Graphite**

code **90694**



Ø76mm
h4000mm
colour **White**

code **90622**

Ø76mm
h4000mm
colour **Sand**

code **90623**

Ø76mm
h4000mm
colour **Graphite**

code **90624**



Ø60mm
h2500mm with base
colour **White**

code **90702**

Ø60mm
h2500mm with base
colour **Sand**

code **90703**

Ø60mm
h2500mm with base
colour **Graphite**

code **90704**

ACCESSORIES:

code **90672 / 90673 / 90674 / 90682 / 90683 / 90684 / 90692 / 90693 / 90694**

code **90622 / 90623 / 90624 / 90702 / 90703 / 90704**



Matita Square

LIGHT IS SHAPE AND VISION

Matita Square is a bollard made of extruded and die-cast aluminum, finished with cataphoresis treatment and a layer of polyester powder paint resistant to outdoor environments.

With clean and simple lines, the diffuser is attached under the head with silicone adhesive to ensure IP protection and is characterized by a conical reflector.

Equipped with a Mid-power LED board (2700K or 3000K), it is available in four heights: h.160mm; h.300mm; h.500mm; h.800mm, and operates at low voltage.

The clean lines and the option to reduce luminance (with the possibility of choosing a version with a black conical reflector) make Matita a versatile bollard for various uses.

Matita Square è un bollard in alluminio estruso e pressofuso finito con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

Dalla linea pure e pulita, il diffusore è invece fissato sotto la testa con collante siliconico a garanzia della tenuta IP ed è caratterizzato da un riflettore conico.

Equipaggiato con scheda Mid-power Led 2700K o 3000K e disponibile in quattro altezze: h.160mm; h.300mm; h.500mm; h.800mm e alimentato a bassa tensione.


La pulizia delle linee e la possibilità di ridurre la luminanza (possibilità di scegliere la versione con riflettore conico nero) rendono matita un bollard dai molteplici utilizzi.





Matita Square

h160




Available finishes:

	white
	sand
	graphite
	aluminium
	corten
	olive green <i>*on request</i>

Light Source	mid power led
Supply	220-240V
CRI	≥80
Electrical Class	II
IP rating	65
Application	ground
Diffuser	frosted polycarbonate

Power	220-240V 6,2Wled 8,5We
Led Colour temp.	2700K/3000K



			lm	white	sand	graphite	aluminium	corten
2700K 6,2Wled 8,5 We	220- 240V	White Reflector	350	901331002	901331003	901331004	901331005	901331008
		Black Reflector	212	901331012	901331013	901331014	901331015	901331018
3000K 6,2Wled 8,5 We	220- 240V	White Reflector	368	901311002	901311003	901311004	901311005	901311008
		Black Reflector	223	901311012	901311013	901311014	901311015	901311018

ACCESSORIES:

code 9041 | anchor bolts □76(100 min) x 160mm

Matita Square

h300




Available finishes:

	white
	sand
	graphite
	aluminium
	corten
	olive green <i>*on request</i>

Light Source mid power led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser frosted polycarbonate

Power 220-240V 6,2Wled 8,5We
Led Colour temp. 2700K/3000K



			lm	white	sand	graphite	aluminium	corten
2700K 6,2Wled 8,5 We	220- 240V	White Reflector	350	901331022	901331023	901331024	901331025	901331028
		Black Reflector	212	901331032	901331033	901331034	901331035	901331038
3000K 6,2Wled 8,5 We	220- 240V	White Reflector	368	901311022	901311023	901311024	901311025	901311028
		Black Reflector	223	901311032	901311033	901311034	901311035	901311038

ACCESSORIES:

code 9041 | anchor bolts □76(100 min) x 160mm

Matita Square

h500




Available finishes:

	white
	sand
	graphite
	aluminium
	corten
	olive green <i>*on request</i>

Light Source mid power led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser frosted polycarbonate

Power 220-240V 6,2Wled 8,5We
Led Colour temp. 2700K/3000K



			lm	white	sand	graphite	aluminium	corten
2700K 6,2Wled 8,5 We	220- 240V	White Reflector	350	901331062	901331063	901331064	901331065	901331068
		Black Reflector	212	901331072	901331073	901331074	901331075	901331078
3000K 6,2Wled 8,5 We	220- 240V	White Reflector	368	901311062	901311063	901311064	901311065	901311068
		Black Reflector	223	901311072	901311073	901311074	901311075	901311078

ACCESSORIES:

code 9041 | anchor bolts □76(100 min) x 160mm

Matita Square

h800




Available finishes:

	white
	sand
	graphite
	aluminium
	corten
	olive green <i>*on request</i>

Light Source	mid power led
Supply	220-240V
CRI	≥80
Electrical Class	II
IP rating	65
Application	ground
Diffuser	frosted polycarbonate

Power	220-240V 6,2Wled 8,5We
Led Colour temp.	2700K/3000K



			lm	white	sand	graphite	aluminium	corten
2700K 6,2Wled 8,5 We	220- 240V	White Reflector	350	901331042	901331043	901331044	901331045	901331048
		Black Reflector	212	901331052	901331053	901331054	901331055	901331058
3000K 6,2Wled 8,5 We	220- 240V	White Reflector	368	901311042	901311043	901311044	901311045	901311048
		Black Reflector	223	901311052	901311053	901311054	901311055	901311058

ACCESSORIES:

code 9041 | anchor bolts □76(100 min) x 160mm



Zeus

A WAY TO RETHINK SHAPES WE HAVE ALWAYS KNOWN

Zeus Simple lines for a soft design bollard for ground or surface installation.

The white colour of the reflector, in contrast with the structure, gives this bollard a touch of design that makes it suitable for any type of installation, the positioning of the LED board on the product makes it capable of a charming and low-impact light.

The structure in extruded and die-cast aluminium, the glass fixed under the emission source with silicone glue to guarantee the IP seal, steel fixing plate.

Zeus ha linee semplici dal design non banale ed è ideale per l'installazione a terra o su superfici; è prodotto in alluminio estruso e pressofuso, finito con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni.

La scheda led è fissata sotto la testa emissiva ed equipaggiata da Mid-power led disponibili in 2700K o 3000K.

La tenuta IP è garantita dal vetro temprato e se-rigrafato, fissato con tecnologia robotica e collante silconico. La piastra di fissaggio in acciaio.





Zeus

h115



Available finishes:



Light Source
Supply
Dimmer
CRI
Electrical Class
IP rating
Application
Diffuser

mid power led
220-240V
upon request
≥80
II
65
ground
transparent tempered glass

Power
Led Colour temp.

220-240V 10Wled 12,6We
2700K/3000K



		lm	white	sand	graphite	aluminium	corten	green
2700K 10Wled 12,6 We	220-240V	645	901531042	901531043	901531044	901531045	901531048	901531046
3000K 10Wled 12,6 We	220-240V	672	901511042	901511043	901511044	901511045	901511048	901511046

Zeus

h315



Available finishes:



Light Source
Supply
Dimmer
CRI
Electrical Class
IP rating
Application
Diffuser

mid power led
220-240V
upon request
≥80
II
65
ground
transparent tempered glass

Power
Led Colour temp.

220-240V 10Wled 12,6We
2700K/3000K



		lm	white	sand	graphite	aluminium	corten	green
2700K 10Wled 12,6 We	220-240V	645	901531052	901531053	901531054	901531055	901531058	9015310516
3000K 10Wled 12,6 We	220-240V	672	901511052	901511053	901511054	901511055	901511058	9015110516

Zeus

h715



Available finishes:



Light Source
Supply
Dimmer
CRI
Electrical Class
IP rating
Application
Diffuser

mid power led
220-240V
upon request
≥80
II
65
ground
transparent tempered glass

Power
Led Colour temp.


220-240V 10Wled 12,6We
2700K/3000K




h715

		lm	white	sand	graphite	aluminium	corten	green
2700K 10Wled 12,6 We	220-240V	645	901531062	901531063	901531064	901531065	901531068	9015310616
3000K 10Wled 12,6 We	220-240V	672	901511062	901511063	901511064	901511065	901511068	9015110616

ACCESSORIES



Anchor bolts
219x49 (90max) x 175mm
code **9042**



3-4 way - 4 poles terminal block IP68
53x26x82mm
code **9005**



ACCESSORIES:

code **9042 / 9005**



Lightsaber

**IT IS HARD TO IMAGINE SOMETHING MORE BEAUTIFUL
THAN THE TURNING UP OF LIGHT IN THE DARK**

Linear outdoor fixture available in multiple models with 4 standard sizes and equipped with two types of light-emitting sources.

The Mid-power LED version offers soft and medium-wide light beams with power ranges from 8W to 32W, with a low-voltage 24V or 220-240V integrated power supply.

The Power LED version offers more technical solutions, with power ranges from 12W to 50W and precise optics that include narrow, medium, and asymmetric beams.

Entirely made of high-quality extruded or die-cast aluminum, treated with cataphoresis and coated with a layer of polyester powder resistant to outdoor environments.

The transparent tempered glass diffuser is attached to the body with a robotic silicon gluing system.

The structure design, with an external housing for the power supply to manage temperatures, and adjustable fixing brackets on the body, make this linear product easy to use.

Apparecchio lineare per esterni in alluminio verniciato che si compone di molteplici modelli disponibili in 4 misure standard ed equipaggiati con due tipi sorgenti emissive.

La versione Mid-power led offre fasci luminosi morbidi e di media ampiezza con potenze fra gli 8W e i 32W alimentazione a bassa tensione 24V o 220-240V integrata.


La versione Power led offre soluzioni più tecniche, con potenze fra 12W e 50W e ottiche puntuali che comprendono fasci stretti, medi e asimmetrici. Interamente in alluminio estruso o pressofuso di primaria qualità, con trattamento di cataforesi e rivestito da uno strato di polvere di poliestere resistente agli ambienti esterni.

Il diffusore in vetro temprato trasparente fissato al corpo con sistema robotico con collante siliconico.

Lo sviluppo della struttura con alloggiamento esterno dell'alimentatore per il contenimento delle temperature e le staffe di fissaggio regolabili sul corpo rendono questo lineare un prodotto di semplice utilizzo.






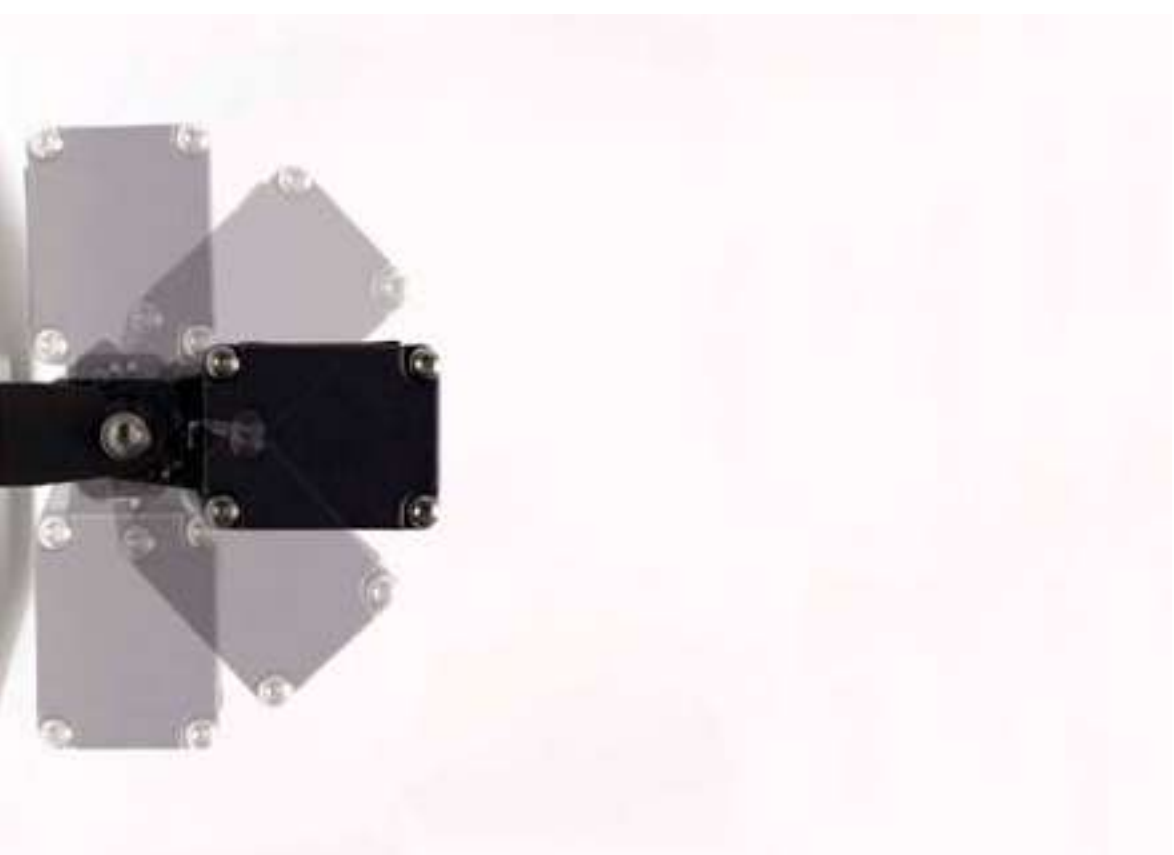







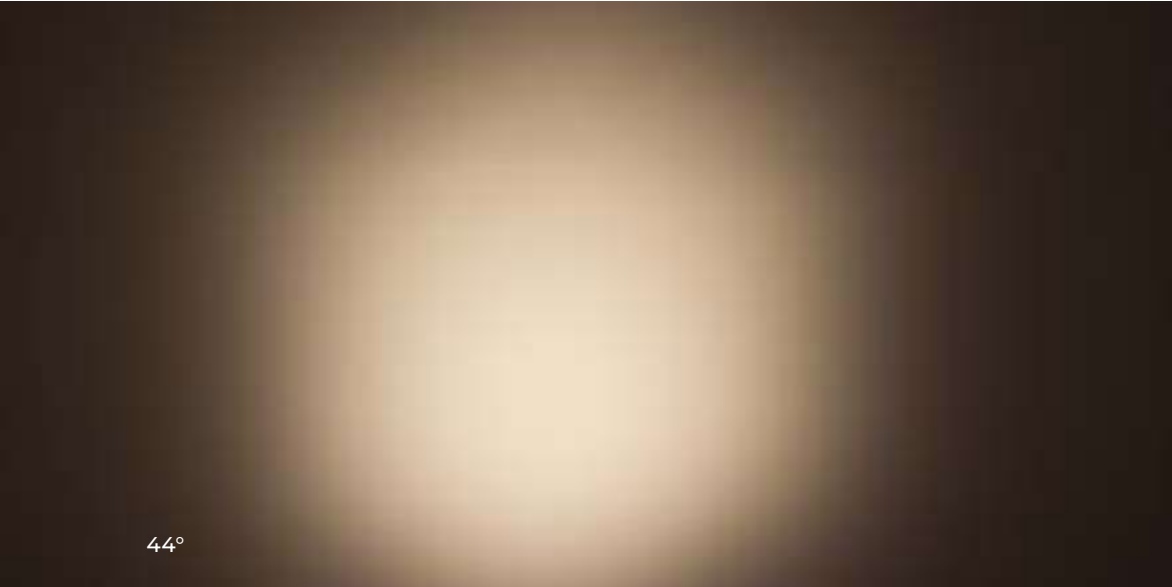

44°



80°



31°x88°







Lightsaber power led

L306mm



Available finishes:

- graphite
- aluminium

Light Source power led
Power 220-240V
Dimmer not
CRI ≥80
IP Rating IP65
Electrical Class I
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 220-240V 12Wled - 15,6We
Led Colour temp. 2700K / 3000K



			lm	graphite	aluminium
2700K	220-240V	14°	1187	901731004	901731005
12Wled		28°	1233	901731014	901731015
15,6 We		45°	1148	901731024	901731025
		52°x12°	1211	901731034	901731035
			lm	graphite	aluminium
3000K	220-240V	14°	1249	901711004	901711005
12Wled		28°	1298	901711014	901711015
15,6 We		45°	1208	901711024	901711025
		52°x12°	1275	901711034	901711035

Lightsaber power led

L586mm



Available finishes:



graphite

aluminium

Light Source power led
Power 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 220-240V
 24,6Wled - 29We
Led Colour temp. 2700K / 3000K



			lm	graphite	aluminium
2700K	220-240V	▲ 14°	2374	901731044	901731045
24,6Wled		▲ 28°	2467	901731054	901731055
29We		▲ 45°	2296	901731064	901731065
		● 52°x12°	2422	901731074	901731075
			lm	graphite	aluminium
3000K	220-240V	▲ 14°	2499	901711044	901711045
24,6Wled		▲ 28°	2596	901711054	901711055
29We		▲ 45°	2416	901711064	901711065
		● 52°x12°	2677	901711074	901711075

Lightsaber power led

L866mm



Available finishes:

- graphite
- aluminium

Light Source power led
Power 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 220-240V
36,6Wled - 41,7We
Led Colour temp. 2700K/3000K



				lm	graphite	aluminium
2700K 36,6Wled 41,7We	220-240V		14°	3560	901731084	901731085
			28°	3700	901731094	901731095
			45°	3444	901731104	901731105
			52°x12°	3632	901731114	901731115
				lm	graphite	aluminium
3000K 36,6Wled 41,7We	220-240V		14°	3748	901711084	901711085
			28°	3894	901711094	901711095
			45°	3624	901711104	901711105
			52°x12°	3824	901711114	901711115

Lightsaber power led

L1146mm



Available finishes:



Light Source power led
Power 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 220-240V
 49,1Wled - 53,3We
Led Colour temp. 2700K/3000K



			lm	graphite	aluminium
2700K	220-240V	▲ 14°	4748	901731124	901731125
49,1Wled		▲ 28°	4932	901731134	901731135
53,3We		▲ 45°	4592	901731144	901731145
		● 52°x12°	4843	901731154	901731155
			lm	graphite	aluminium
3000K	220-240V	▲ 14°	4998	901711124	901711125
49,1Wled		▲ 28°	5192	901711134	901711135
53,3We		▲ 45°	4832	901711144	901711145
		● 52°x12°	5098	901711154	901711155

Lightsaber mid power led

L306mm



Available finishes:



graphite



aluminium

Light Source

mid power led

Power

24V - 220-240V

Dimmer

not

CRI

≥80

IP Rating

IP65

Electrical Class

I, III

Application

wall, floor, roof

Diffuser

tempered extra-clear glass,
silk-screened

Power

24V 8,2Wled

220-240V 8,2Wled-10,8We

Led Colour temp.

2700K/3000K



			lm	graphite	aluminium
2700K	24V III	44°	669	901732134	901732135
8,2Wled		80°	566	901732204	901732205
		31°x88°	554	901732014	901732015

			lm	graphite	aluminium
3000K	24V III	44°	704	901712134	901712135
8,2Wled		80°	597	901712004	901712005
		31°x88°	583	901712014	901712015

			lm	graphite	aluminium
2700K	220-240V	44°	669	901731224	901731225
8,2Wled		80°	566	901731164	901731165
10,8We		31°x88°	554	901732024	901732025

			lm	graphite	aluminium
3000K	220-240V	44°	704	901711224	901711225
8,2Wled		80°	597	901711164	901711165
10,8We		31°x88°	583	901712024	901712025

Lightsaber mid power led

L584mm

Available finishes:



Light Source mid power led
Power 24V - 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I, III
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 24V 16,2Wled
 220-240V 16,2Wled-17,6We
Led Colour temp. 2700K/3000K




			lm	graphite	aluminium
2700K	24V III	44°	1338	901732144	901732145
16,2Wled		80°	1133	901732034	901732035
		31°x88°	1108	901732044	901732045

			lm	graphite	aluminium
3000K	24V III	44°	1409	901712144	901712145
16,2Wled		80°	1193	901712034	901712035
		31°x88°	1166	901712044	901712045

			lm	graphite	aluminium
2700K	220-240V	44°	1338	901731234	901731235
16,2Wled		80°	1133	901731174	901731175
17,6We		31°x88°	1108	901732054	901732055

			lm	graphite	aluminium
3000K	220-240V	44°	1409	901711234	901711235
16,2Wled		80°	1193	901711174	901711175
17,6We		31°x88°	1166	901712054	901712055

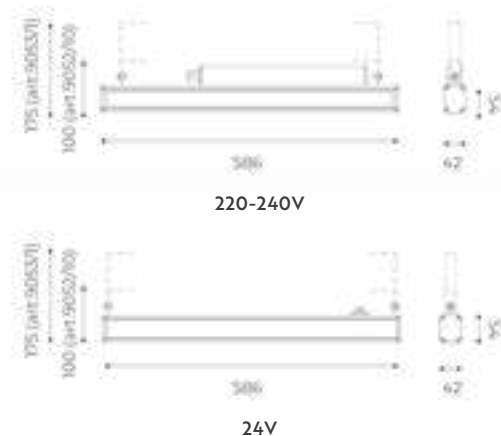

Lightsaber mid power led

L866mm

Available finishes:

- graphite
- aluminium

Light Source mid power led
Power 24V - 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I, III
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 24V 24Wled
220-240V 24Wled-27,9We
Led Colour temp. 2700K/3000K




				lm	graphite	aluminium
2700K 24Wled	24V III		44°	2007	901732154	901732155
			80°	1698	901732064	901732065
			31°X88°	1662	901732074	901732075

				lm	graphite	aluminium
3000K 24Wled	24V III		44°	2112	901712154	901712155
			80°	1791	901712064	901712065
			31°X88°	1749	901712074	901712075

				lm	graphite	aluminium
2700K 24Wled 27,9We	220-240V		44°	2007	901731244	901731245
			80°	1698	901731184	901731185
			31°X88°	1662	901731194	901731195

				lm	graphite	aluminium
3000K 24Wled 27,9We	220-240V		44°	2112	901711244	901711245
			80°	1791	901711184	901711185
			31°X88°	1749	901711194	901711195

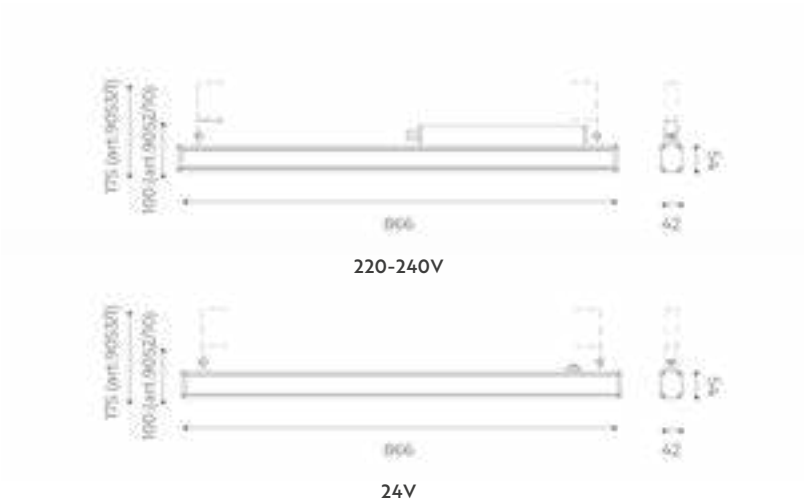

Lightsaber mid power led

L1146mm

Available finishes:



graphite

aluminium

Light Source

Power

Dimmer

CRI

IP Rating

Electrical Class

Application

Diffuser

mid power led

24V - 220-240V

upon request

≥80

IP65

I, III

wall, floor, roof

tempered extra-clear glass,

silk-screened

Power

24V 30,7Wled

220-240V 30,7Wled-35,2We

Led Colour temp.

2700K/3000K



			lm	graphite	aluminium
2700K	24V III	44°	2676	901732164	901732165
30,7Wled		80°	2264	901732084	901732085
		31°x88°	2216	901732094	901732095

			lm	graphite	aluminium
3000K	24V III	44°	2816	901712164	901712165
30,7Wled		80°	2388	901712084	901712085
		31°x88°	2332	901712094	901712095


			lm	graphite	aluminium
2700K	220-240V	44°	2676	901731254	901731255
30,7Wled		80°	2264	901731204	901731205
35,2We		31°x88°	2216	901731214	901731215

			lm	graphite	aluminium
3000K	220-240V	44°	2816	901711254	901711255
30,7Wled		80°	2388	901711204	901711205
35,2We		31°x88°	2332	901711214	901711215






ACCESSORIES




Brackets kit l 100mm
colour **Aluminium**

code **9050**




Inground installation spike
25x230x247mm
For 300mm model only
colour **Graphite**

code **90614**




Brackets kit l 100mm
colour **Graphite**

code **9052**




Inground installation spike
25x230x247mm
For 300mm model only
colour **Aluminium**

code **90615**




Brackets kit l 175mm
colour **Aluminium**

code **9051**




Power supply 220-240V DC 70W
IP67
267x79x52mm

code **9049**



Brackets kit l 175mm
colour **Graphite**

code **9053**




Power supply 220-240V DC 150W
IP67 267x79x52mm

code **9057**




Multiple connection kit
23x56x175mm

code **9055**



SPD CL.1 12KV 320V UC max
40x57x20mm

code **9058**



Single connection kit
Ø23x117mm

code **9054**

ACCESSORIES:

code **9050 / 9052 / 9051 / 9053 / 9054 / 9055 / 9058 / 90614 / 90615 / 9049 / 9057**



Miron

HUMAN TECHNIQUE, CARESS OF LIGHT

Miron is a family of compact projectors in two sizes, suitable for surface or pole mounting.

Made of die-cast aluminium and finished with a cataphoresis treatment and a layer of polyester powder paint resistant to outdoor environments, it comes with an integrated power supply.

Various optics available and silicone tempered glass to guarantee IP sealing. Equipped with Power LEDs in 2700K and 3000K colours, it is adjustable on the horizontal axis so that the light beam can be directed.

The base is painted like the body and acts as a compartment for the connector, concealing the fixing bracket.

Miron è una famiglia di proiettori compatti e realizzati in due dimensioni, adatta per l'installazione su superfici o su palo.

In alluminio pressofuso e finito con trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni, è fornito con alimentatore integrato.

Diverse ottiche disponibili e vetro serigrafato e temprato siliconato per garantirne la tenuta IP. Equipaggiato da Power Led in colore 2700K e 3000K, è orientabile sull'asse orizzontale così da poter direzionare il fascio luminoso.

La base è verniciata come il corpo e funge da vano per il connettore, nascondendo la staffa di fissaggio.













Miron 16



Available finishes:

	white
	sand
	graphite
	aluminium
	corten
	olive green <i>*on request</i>

Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
220-240V
upon request
≥80
IP65
I
floor, wall, pole, ceiling
transparent screen-printed
tempered glass

Power
Led Colour temp.

220-240V 16,8Wled 18,6We
2700K/3000K



			lm	white	sand	graphite	aluminium	corten
2700K 16,8Wled 18,6We	220-240V	30°	2105	900531002	900531003	900531004	900531005	900531008
		50°	2137	900531012	900531013	900531014	900531015	900531018
		Street	1580	900531032	900531033	900531034	900531035	900531038
		Asymmetric	1925	900531022	900531023	900531024	900531025	900531028
			lm	white	sand	graphite	aluminium	corten
3000K 16,8Wled 18,6We	220-240V	30°	2216	900511002	900511003	900511004	900511005	900511008
		50°	2249	900511012	900511013	900511014	900511015	900511018
		Street	1663	900511032	900511033	900511034	900511035	900511038
		Asymmetric	2026	900511022	900511023	900511024	900511025	900511028

Miron 24



Available finishes:

	white
	sand
	graphite
	aluminium
	corten
	olive green <i>*on request</i>

Light Source	power led
Supply	220-240V
Dimmer	upon request
CRI	≥80
IP rating	IP65
Electrical Class	I
Application	floor, wall, pole, ceiling
Diffuser	transparent screen-printed tempered glass

Power	36Wled 40,2We
Led Colour temp.	2700K/3000K




			lm	white	sand	graphite	aluminium	corten
2700K	220-240V	30°	4499	900531052	900531053	900531054	900531055	900531058
36Wled		50°	4565	900531062	900531063	900531064	900531065	900531068
40,2We		Street	3375	900531082	900531083	900531084	900531085	900531088
		Asymmetric	4113	900531072	900531073	900531074	900531075	900531078

			lm	white	sand	graphite	aluminium	corten
3000K	220-240V	30°	4736	900511052	900511053	900511054	900511055	900511058
36Wled		50°	4805	900511062	900511063	900511064	900511065	900511068
40,2We		Street	3553	900511082	900511083	900511084	900511085	900511088
		Asymmetric	4330	900511072	900511073	900511074	900511075	900511078




ACCESSORIES




Bracket Ø76 l 150mm
colour **Graphite**

code **90214**




Bracket Ø76 l 400mm colour
Aluminium

code **90225**




Bracket Ø76 l 150mm
colour **Aluminium**

code **90215**




Bracket Ø76 l 400mm colour
Graphite

code **90224**




Double Bracket Ø76 l 150mm
colour **Graphite**

code **90234**




Double Bracket Ø76 l 400mm
colour **Graphite**

code **90244**




Double Bracket Ø76 l 150mm
colour **Aluminium**

code **90235**



Double Bracket Ø76 l 400mm
colour **Aluminium**

code **90245**



Pole connector Ø60
colour **Aluminium**

code **90255**

ACCESSORIES:

code **90214 / 90215 / 90234 / 90235 / 90224 / 90225 / 90244 / 90245 / 90255**



ACCESSORIES

	Ø76mm h4000mm colour White code 90622	Ø76mm h4000mm colour Sand code 90623	Ø76mm h4000mm colour Graphite code 90624
---	---	--	--

ACCESSORIES:

code 90622 / 90623 / 90624

LEGEND

	24 V		angle beam: 30°		street beam		degree of protection IP 20
	220-240V		angle beam: 31°x88°		suspension installation		degree of protection IP 40
	battery		angle beam: 32°		bollard installation		degree of protection IP 54
	complies with CE directives		angle beam: 36°		pole installation		degree of protection IP 65
	class I		angle beam: 44°		head pole		degree of protection IP 66
	class II		angle beam: 45°		wall installation		degree of protection IP 67
	class III		angle beam: 50°		ceiling installation		degree of protection IP 68
	dimmer 1_10V		angle beam: 52°		ground installation		led cob
	dimmer dali		angle beam: 52°x12°		recessed ceiling installation downlight		led midpower
	dimmer on request		angle beam: 56°		recessed ground installation		led power
	dimmer: phase cut		angle beam: 60°		wall recessed installation		bulb E27
	dimmer PWM		angle beam: 65°		IK 01		bulb G9
	dimmer touch		angle beam: 80°		IK 02		bulb GU10
	angle beam: 10°		angle beam: 120°		IK 03		equipped with cable of the specified length - 0,2m
	angle beam: 14°		angle beam: 130°		IK 04		equipped with cable of the specified length - 1m
	angle beam: 15°		angle beam: 150°		IK 05		equipped with cable of the specified length - 5m
	angle beam: 18°		angle beam: 180°		IK 06		rotation
	angle beam: 19°		angle beam: 360°		IK 07		rotation 90-20°
	angle beam: 26°		asymmetrical beam		IK 08		rotation 360° horizontal
	angle beam: 28°		diffused beam		IK 09		360° vertical rotation
Wled	nominal consumption						rotation Bella
We	total electricity consumption						walkover

ACCESSORIES

9000	box for installation ZERO D.110	9084	Beam Spreader Snap 36° - Lente 36°
9001	box for installation ZERO D.45	9085	Beam Spreader Snap 60° - Lente 60°
9002	box for installation ZERO D.65	9086	Linear Snap 10°x60°
9003	box for installation ZERO D.85	9087	Flat Top Snap 25°x25°
9004	2 way 3 polese terminal block IP68 2	9088	Louver Snap cutoff angle 40° - Honeycomb
9005	3-4 way 4 polese terminal block IP68 2	9089	recessed box for ITACA
9006	power supply 16W 110-240V IP20	9090	Honeycomb DOTLIGHT 50
9007	power supply 20W 220-240V IP20	9091	Honeycomb DOTLIGHT 70
9008	power supply 50W 220-240V IP20	9092	Honeycomb DOTLIGHT 110
9009	anchor bolts Matita	9093	anchor bolts
9018	recesed box ModuloA SQ	90117	tube frame DX38 BK
9019	recesed box ModuloA RC	90127	eyelid frame DX38 BK
9036	2-3 way 3 poles terminal block	90157	tube frame DX54 BK
9037	power supply 8W 220-240V IP54	90167	eyelid frame DX54 BK
9038	gold shield ModuloA SQ	90214	bracket L.150MM D.76MM GR
9039	gold shield ModuloA RC	90215	bracket L.150MM D.76MM AL
9041	anchor bolts Matita Square	90224	bracket L.400MM D.76MM GR
9042	anchor bolts Metoo/Zeus	90225	bracket L.400MM D.76MM AL
9044	shield 180° Matita/Sofia	90234	double bracket L.150MM D.76MM GR
9049	power supply 70W IP67	90235	double bracket L.150MM D.76MM AL
9050	brackets kit L. 100 AL	90244	double bracket L.400MM D.76MM GR
9051	brackets kit L. 175 AL	90245	double bracket L.400MM D.76MM AL
9052	brackets kit L. 100 GR	90255	pole adapter for pole d.60
9053	brackets kit L. 175 GR	90614	bracket + spike Lightsaber L300 GR
9054	single connector kit IP68 Lightsaber	90615	bracket + spike Lightsaber L300 AL
9055	multiple connector kit IP68 Lightsaber	90622	pole D.76 4000MM WH
9057	power supply 24V DC 150W IP65	90623	pole D.76 4000MM SB
9058	surge protector SPD CL.I 230V	90624	pole D.76 4000MM GR
9059	power supply 16W IP65	90672	pole D.60 1200MM WH
9062	anchor bolts Muse/Gler sun	90673	pole D.60 1200MM SB
9070	battery for Bella	90674	pole D.60 1200MM GR
9073	recessed box Tasca	90682	pole D.60 1600MM WH
9074	gold shield Tasca	90683	pole D.60 1600MM SB
9075	aluminu shield Tasca	90684	pole D.60 1600MM GR
9076	cover BK Lila	90692	pole D.60 2600MM WH
9078	concrete box for installation for Talon Recessed	90693	pole D.60 2600MM SB
9079	concrete box for installation for Divar Recessed	90694	pole D.60 2600MM GR
9080	IP68 connection box gel	90702	pole D.60 2500MM with base WH
9081	2 poles cable L5000MM incl.female connector	90703	pole D.60 2500MM with base SB
9082	2 poles cable L10000MM incl.female connector	90704	pole D.60 2500MM with base GR

Diomede srl

Via Meucci, 5 - Ornago | 20876 MB Italy
+ 39 039 2296724 | info@diomedelight.com
diomedelight.com

Credits

Graphic Project: ILARIA MARTIN

Render: VALERIO GESSATE

Photos: ALBERTO STRADA | ALBERTO FAVARA | SARAH ELISE
SARTORE | FABIO OGGERO

Assistance: DIOMEDE LIGHT TEAM

Artistic Featuring: ABAMULU VIGANÒ

@2026 The company is not responsible for any printing errors, incorrect dimensions, descriptions or technical data; and reserves the right to modify all the products described herein at any time and without notice. Any reproduction, even partial, is prohibited, unless authorized.



diomede

LET THERE BE LIGHT

diomedelight.com